

## AEE20W-M Series

20 Watts

DC/DC Converter

**Total Power:** 20 Watts  
**Input Voltage:** 9 to 18 Vdc  
18 to 36 Vdc  
36 to 75Vdc  
**# of Outputs:** Single, dual



### Special Features

- 4200Vac reinforced Insulation
- Insulation rated for 300Vrms working voltage
- Medical safety certifications
- 2 x MOPP rated
- Wide 2:1 input voltage range
- Low leakage current <5uA
- Operating temperature range -40 °C to +80 °C (With derating)
- No minimum load requirement
- Overload/voltage and short circuit protection
- Input filter meets EN 55011, class A and FCC, level A
- Medical EMC Standard meets 4th Edition of EMI EN55011 and EMS EN60601-1-2
- 2"x 1" plastic package
- 3 Years product warranty

### Safety

EN/IEC 60601-1 3rd Edition,  
ANSI/AAMI ES60601-1  
2x MOPP  
CE Mark

## Product Descriptions

The AEE20W-M series is a new range of high performance dc-dc converter modules with a reinforced insulation system. I/O isolation voltage is specified for 4200Vac, which is rated for 300Vrms working voltage. The product comes in a compact 2"x1" industrial standard package. All 18 models available for 12, 24, 48Vdc with wide 2:1 input voltage range and tight output regulation.

The AEE20W-M series DC/DC converters offer an economical solution for demanding applications in medical instrumentation requesting a certified supplementary or reinforced insulation system to comply with the latest medical safety standards.

## Model Numbers

Model	Input Voltage	Output Voltage	Maximum Load	Efficiency
AEE04A12-M	9-18Vdc	5Vdc	4A	86%
AEE02B12-M	9-18Vdc	12Vdc	1.67A	89%
AEE02C12-M	9-18Vdc	15Vdc	1.33A	88%
AEE02H12-M	9-18Vdc	24Vdc	0.84A	89%
AEE02BB12-M	9-18Vdc	±12 Vdc	±0.84A	89%
AEE02CC12-M	9-18Vdc	±15 Vdc	±0.67A	89%
AEE04A24-M	18-36Vdc	5Vdc	4A	88%
AEE02B24-M	18-36Vdc	12Vdc	1.67A	89%
AEE02C24-M	18-36Vdc	15Vdc	1.33A	89%
AEE02H24-M	18-36Vdc	24Vdc	0.84A	90%
AEE02BB24-M	18-36Vdc	±12 Vdc	±0.84A	90%
AEE02CC24-M	18-36Vdc	±15 Vdc	±0.67A	90%
AEE04A48-M	36-75Vdc	5Vdc	4A	88%
AEE02B48-M	36-75Vdc	12Vdc	1.67A	89%
AEE02C48-M	36-75Vdc	15Vdc	1.33A	90%
AEE02H48-M	36-75Vdc	24Vdc	0.84A	89%
AEE02BB48-M	36-75Vdc	±12 Vdc	±0.84A	89%
AEE02CC48-M	36-75Vdc	±15 Vdc	±0.67A	90%

## Options

None

## Electrical Specifications

### Absolute Maximum Ratings

Stress in excess of those listed in the “Absolute Maximum Ratings” may cause permanent damage to the power supply. These are stress ratings only and functional operation of the unit is not implied at these or any other conditions above those given in the operational sections of this TRN. Exposure to any absolute maximum rated condition for extended periods may adversely affect the power supply’s reliability.

Table 1. Absolute Maximum Ratings:

Parameter	Model	Symbol	Min	Typ	Max	Unit
Input Surge Voltage 100 mSec. max	12V Input Models	$V_{IN,DC}$	-0.7	-	25	Vdc
	24V Input Models		-0.7	-	50	Vdc
	48V Input Models		-0.7	-	100	Vdc
Maximum Output Power	All models	$P_{O,max}$	-	-	20	W
Isolation Voltage Input to output (60 seconds)	All models		4200	-	-	Vac
Isolation Resistance (500Vdc)	All models		10	-	-	Gohm
Isolation Capacitance (100KHz,1V)	All models		-	-	80	pF
Thermal Impedance	Natural Convection		13	-	-	°C/W
Operating Ambient Temperature Range	Convection Cooling		-40		+80 <sup>1</sup>	°C
Operating Case Temperature	All models	$T_{CASE}$	-	-	+95	°C
Storage Temperature	All models	$T_{STG}$	-50		+125	°C
Humidity (non-condensing)	Operating	All models	-	-	95	%
	Non-operating	All models	-	-	95	%
MTBF	MIL-HDBK-217F@25°C, Ground Benign		1000000	-	-	Hours

Note 1 - With Derating

## Input Specifications

Table 2. Input Specifications:

Parameter		Condition	Symbol	Min	Typ	Max	Unit
Operating Input Voltage, DC	12V Input Models	All	$V_{IN,DC}$	9	12	18	Vdc
	24V Input Models			18	24	36	Vdc
	48V Input Models			36	48	75	Vdc
Start-Up Threshold Voltage	12V Input Models	All	$V_{IN,ON}$	-	-	9	Vdc
	24V Input Models			-	-	18	Vdc
	48V Input Models			-	-	36	Vdc
Under Voltage Lockout	12V Input Models	All	$V_{IN,OFF}$	-	7.5	-	Vdc
	24V Input Models			-	15	-	Vdc
	48V Input Models			-	33	-	Vdc
Input reflected ripple current	12V Input Models	0 to 500KHz, 4.7uH source impedance	$I_{IN,ripple}$	-	100	-	mA
	24V Input Models			-	50	-	mA
	48V Input Models			-	30	-	mA
Input Current	AEE04A12-M	$V_{IN,DC}=V_{IN,nom}$	$I_{IN,full\ load}$	-	1938	-	mA
	AEE02B12-M			-	1876	-	mA
	AEE02C12-M			-	1893	-	mA
	AEE02H12-M			-	1888	-	mA
	AEE02BB12-M			-	1888	-	mA
	AEE02CC12-M			-	1882	-	mA
	AEE04A24-M			-	947	-	mA
	AEE02B24-M			-	938	-	mA
	AEE02C24-M			-	936	-	mA
	AEE02H24-M			-	933	-	mA
	AEE02BB24-M			-	933	-	mA
	AEE02CC24-M			-	931	-	mA
	AEE04A48-M			-	473	-	mA
	AEE02B48-M			-	469	-	mA
	AEE02C48-M			-	463	-	mA
	AEE02H48-M			-	472	-	mA
AEE02BB48-M	-	472	-	mA			
AEE02CC48-M	-	465	-	mA			
No Load Input Current ( $V_O$ On, $I_O = 0A$ )	12V Input Models	$V_{IN,DC}=V_{IN,nom}$	$I_{IN,no\_load}$	-	20	-	mA
	24V Input Models			-	15	-	mA
	48V Input Models			-	10	-	mA

## Input Specifications

Table 2. Input Specifications con't:

Parameter		Condition	Symbol	Min	Typ	Max	Unit
Efficiency @Max. Load	AEE04A12-M	$V_{IN,DC}=V_{IN,nom}$ $I_O=I_{O,max}$ $T_A=25\text{ }^{\circ}\text{C}$	$\eta$	-	86	-	%
	AEE02B12-M			-	89	-	%
	AEE02C12-M			-	88	-	%
	AEE02H12-M			-	89	-	%
	AEE02BB12-M			-	89	-	%
	AEE02CC12-M			-	89	-	%
	AEE04A24-M			-	88	-	%
	AEE02B24-M			-	89	-	%
	AEE02C24-M			-	89	-	%
	AEE02H24-M			-	90	-	%
	AEE02BB24-M			-	90	-	%
	AEE02CC24-M			-	90	-	%
	AEE04A48-M			-	88	-	%
	AEE02B48-M			-	89	-	%
	AEE02C48-M			-	90	-	%
	AEE02H48-M			-	89	-	%
AEE02BB48-M	-	89	-	%			
AEE02CC48-M	-	90	-	%			
Leakage current		$V_{IN,DC}=240\text{Vac}$ $F=60\text{Hz}$	$I_{leakage}$	-	-	5	$\mu\text{A}$
Internal Filter Type		All	Internal Pi Type				

## Output Specifications

Table 3: Output Specifications

Parameter		Condition	Symbol	Min	Typ	Max	Unit
Output Voltage Set -Point		$V_{IN,DC}=V_{IN,nom}$ $I_O=I_{O,max}$ $T_A=25\text{ }^\circ\text{C}$	$\pm\%V_O$	-	1	-	%
Output Voltage Balance	Dual Output, Balanced Loads	All	$\pm\%V_O$	-	-	2.0	%
Output Current	AEE04A12-M	Convection Cooling	$I_O$	-	-	4	A
	AEE02B12-M			-	-	1.67	A
	AEE02C12-M			-	-	1.33	A
	AEE02H12-M			-	-	0.84	A
	AEE02BB12-M			-	-	$\pm 0.84$	A
	AEE02CC12-M			-	-	$\pm 0.67$	A
	AEE04A24-M			-	-	4	A
	AEE02B24-M			-	-	1.67	A
	AEE02C24-M			-	-	1.33	A
	AEE02H24-M			-	-	0.84	A
	AEE02BB24-M			-	-	$\pm 0.84$	A
	AEE02CC24-M			-	-	$\pm 0.67$	A
	AEE04A48-M			-	-	4	A
	AEE02B48-M			-	-	1.67	A
	AEE02C48-M			-	-	1.33	A
	AEE02H48-M			-	-	0.84	A
AEE02BB48-M	-	-	$\pm 0.84$	A			
AEE02CC48-M	-	-	$\pm 0.67$	A			
Load Capacitance <sup>1</sup>	AEE04A12-M	All		-	-	6800	$\mu\text{F}$
	AEE02B12-M			-	-	1160	$\mu\text{F}$
	AEE02C12-M			-	-	750	$\mu\text{F}$
	AEE02H12-M			-	-	295	$\mu\text{F}$
	AEE02BB12-M			-	-	590#	$\mu\text{F}$
	AEE02CC12-M			-	-	380#	$\mu\text{F}$
	AEE04A24-M			-	-	6800	$\mu\text{F}$
	AEE02B24-M			-	-	1160	$\mu\text{F}$
	AEE02C24-M			-	-	750	$\mu\text{F}$
	AEE02H24-M			-	-	295	$\mu\text{F}$
	AEE02BB24-M			-	-	590#	$\mu\text{F}$
	AEE02CC24-M			-	-	380#	$\mu\text{F}$
	AEE04A48-M			-	-	6800	$\mu\text{F}$
	AEE02B48-M			-	-	1160	$\mu\text{F}$
	AEE02C48-M			-	-	750	$\mu\text{F}$
	AEE02H48-M			-	-	295	$\mu\text{F}$
AEE02BB48-M	-	-	590#	$\mu\text{F}$			
AEE02CC48-M	-	-	380#	$\mu\text{F}$			

Note 1 - # for each output

## Output Specifications

Table 3. Output Specifications con't:

Parameter		Condition	Symbol	Min	Typ	Max	Unit
Start Up Time (Power On)		$V_{IN,DC}=V_{IN,nom}$ $I_O=I_{O,max}$ Resistive Load	$T_{Turn-On}$	-	-	30	mSec
Line Regulation		$V_{IN,DC}=V_{IN,min}$ to $V_{IN,max}$	$\pm\%V_O$	-	-	0.5	%
Load Regulation	Single Output	$I_O=I_{O,min}$ to $I_{O,max}$	$\pm\%V_O$	-	-	0.5	%
	Dual Output		$\pm\%V_O$	-	-	1.0	%
Switching Frequency		All	$f_{sw}$	-	285	-	KHz
$V_O$ Dynamic Response		25% load change	$\pm\%V_O$ $t_s$	-	$\pm 3$ -	$\pm 5$ 300	% uSec
Settling Time							
Temperature Coefficient		All	$\%/^{\circ}C$	-	-	0.02	%
Output Over Current Protection <sup>2</sup>		All	$\%I_{O,max}$	-	150	-	%
Output Short Circuit Protection		All		Hiccup Mode 0.7 Hz type, Automatic Recovery			
Output Over Voltage Protection	AEE04A12-M	All		-	6.2	-	Vdc
	AEE02B12-M			-	15	-	Vdc
	AEE02C12-M			-	18	-	Vdc
	AEE02H12-M			-	27	-	Vdc
	AEE02BB12-M			-	$\pm 15$	-	Vdc
	AEE02CC12-M			-	$\pm 18$	-	Vdc
	AEE04A24-M			-	6.2	-	Vdc
	AEE02B24-M			-	15	-	Vdc
	AEE02C24-M			-	18	-	Vdc
	AEE02H24-M			-	27	-	Vdc
	AEE02BB24-M			-	$\pm 15$	-	Vdc
	AEE02CC24-M			-	$\pm 18$	-	Vdc
	AEE04A48-M			-	6.2	-	Vdc
	AEE02B48-M			-	15	-	Vdc
	AEE02C48-M			-	18	-	Vdc
	AEE02H48-M			-	27	-	Vdc
	AEE02BB48-M			-	$\pm 15$	-	Vdc
	AEE02CC48-M			-	$\pm 18$	-	Vdc

Note 2 - Hiccup Automatic Recovery

## Output Specifications

Table 3. Output Specifications con't:

Parameter		Condition	Symbol	Min	Nom	Max	Unit
Output Ripple, pk-pk	AEE04A12-M	Measure with a 4.7uF ceramic capacitor in parallel with a 10uF tantalum capacitor, 0 to 20MHz bandwidth	V <sub>O</sub>	-	50	-	mV <sub>PK-PK</sub>
	AEE02B12-M			-	100	-	mV <sub>PK-PK</sub>
	AEE02C12-M			-	100	-	mV <sub>PK-PK</sub>
	AEE02H12-M			-	150	-	mV <sub>PK-PK</sub>
	AEE02BB12-M			-	100	-	mV <sub>PK-PK</sub>
	AEE02CC12-M			-	100	-	mV <sub>PK-PK</sub>
	AEE04A24-M			-	50	-	mV <sub>PK-PK</sub>
	AEE02B24-M			-	100	-	mV <sub>PK-PK</sub>
	AEE02C24-M			-	100	-	mV <sub>PK-PK</sub>
	AEE02H24-M			-	150	-	mV <sub>PK-PK</sub>
	AEE02BB24-M			-	100	-	mV <sub>PK-PK</sub>
	AEE02CC24-M			-	100	-	mV <sub>PK-PK</sub>
	AEE04A48-M			-	50	-	mV <sub>PK-PK</sub>
	AEE02B48-M			-	100	-	mV <sub>PK-PK</sub>
	AEE02C48-M			-	100	-	mV <sub>PK-PK</sub>
	AEE02H48-M			-	150	-	mV <sub>PK-PK</sub>
	AEE02BB48-M			-	100	-	mV <sub>PK-PK</sub>
AEE02CC48-M	-	100	-	mV <sub>PK-PK</sub>			



## AEE04A12-M Performance Curves

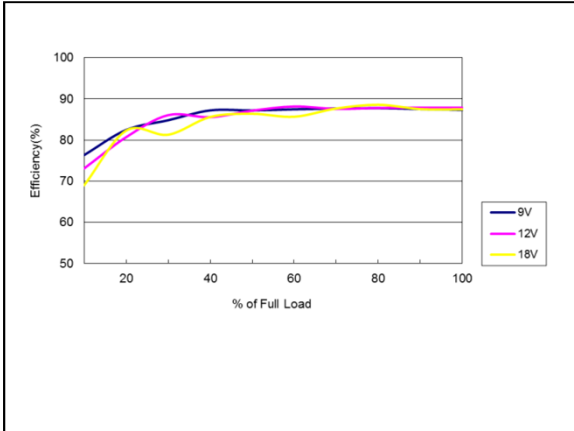


Figure 1: AEE04A12-M Efficiency Versus Output Current Curve  
Vin = 9 to 18Vdc Load: Io = 0 to 4A

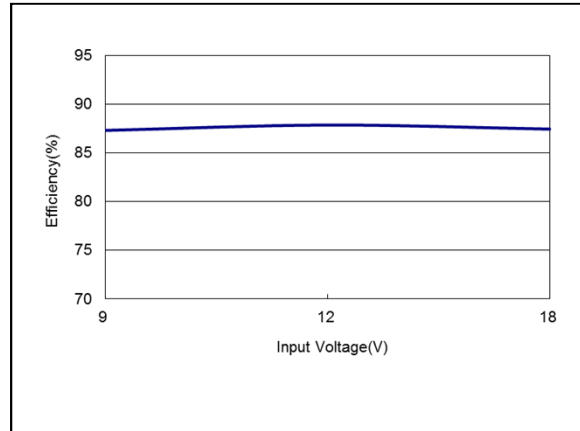


Figure 2: AEE04A12-M Efficiency Versus Input Voltage Curve  
Vin = 9 to 18Vdc Load: Io = 4A

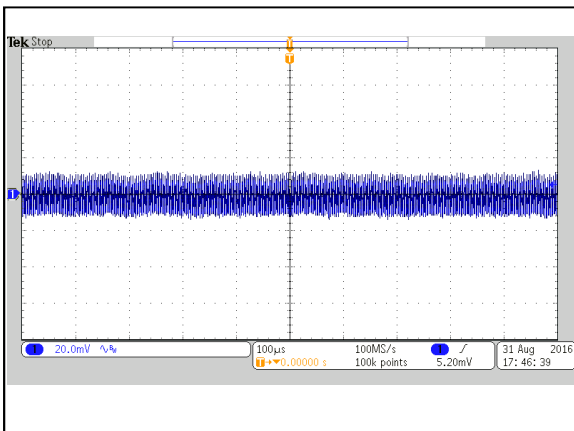


Figure 3: AEE04A12-M Ripple and Noise Measurement  
Vin = 12Vdc Load: Io = 4A  
Ch 1: Vo

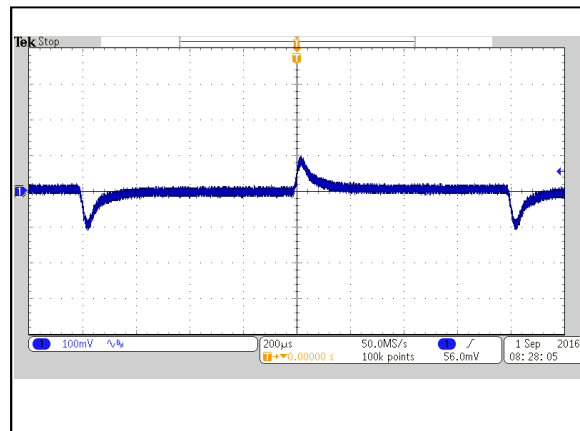


Figure 4: AEE04A12-M Transient Response  
Vin = 12Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

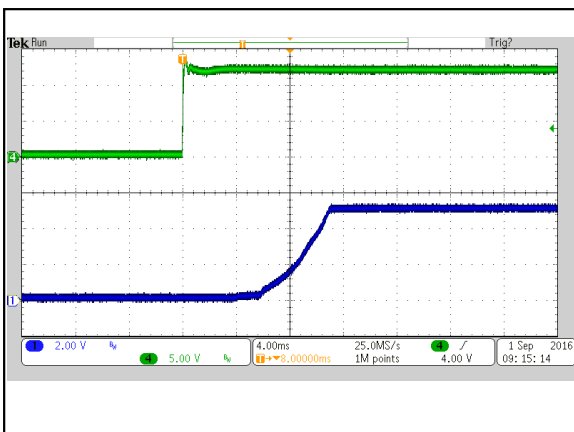


Figure 5: AEE04A12-M Output Voltage Startup Characteristic by Vin  
Vin = 12Vdc Load: Io = 4A  
Ch1: Vo Ch4: Vin

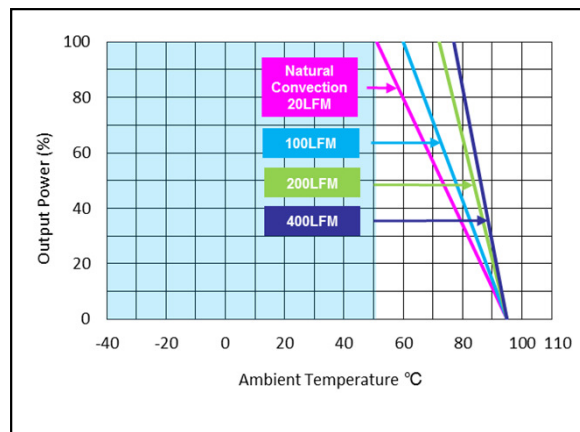


Figure 6: AEE04A12-M Derating Output Current vs Ambient Temperature  
Vin = 12Vdc Load: Io = 4A

## AEE02B12-M Performance Curves

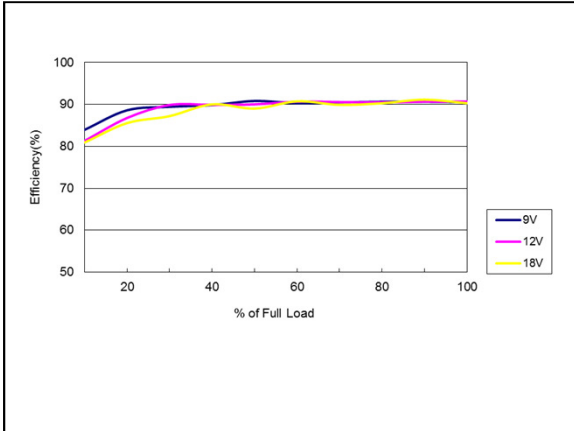


Figure 7: AEE02B12-M Efficiency Versus Output Current Curve  
Vin = 9 to 18Vdc Load: Io = 0 to 1.67A

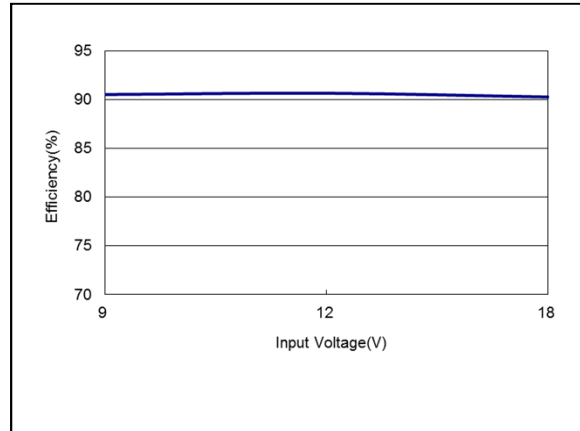


Figure 8: AEE02B12-M Efficiency Versus Input Voltage Curve  
Vin = 9 to 18Vdc Load: Io = 1.67A

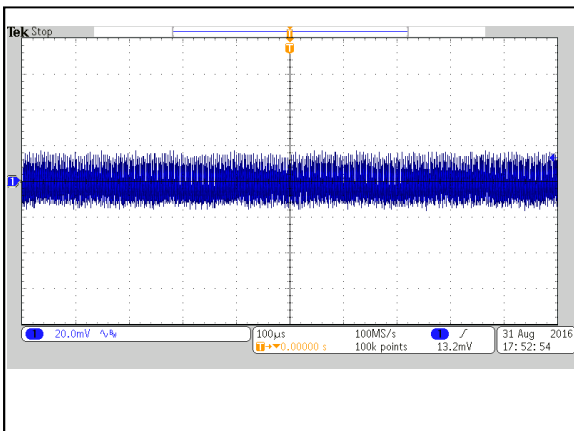


Figure 9: AEE02B12-M Ripple and Noise Measurement  
Vin = 12Vdc Load: Io = 1.67A  
Ch 1: Vo

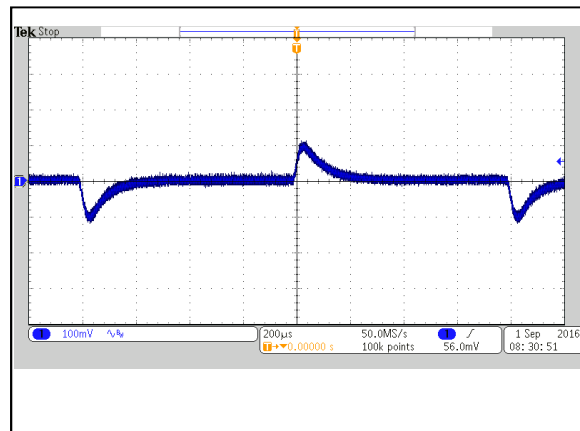


Figure 10: AEE02B12-M Transient Response  
Vin = 12Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

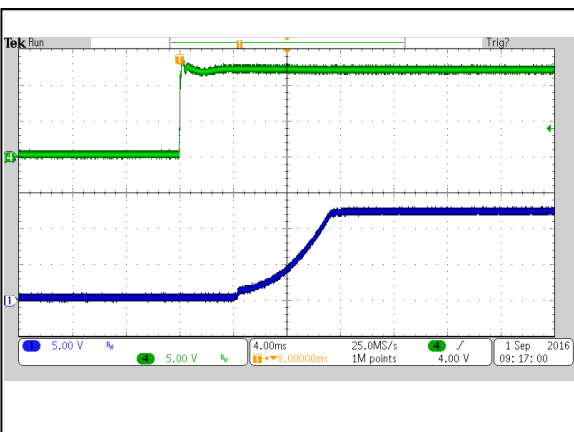


Figure 11: AEE02B12-M Output Voltage Startup Characteristic by Vin  
Vin = 12Vdc Load: Io = 1.67A  
Ch1: Vo Ch4: Vin

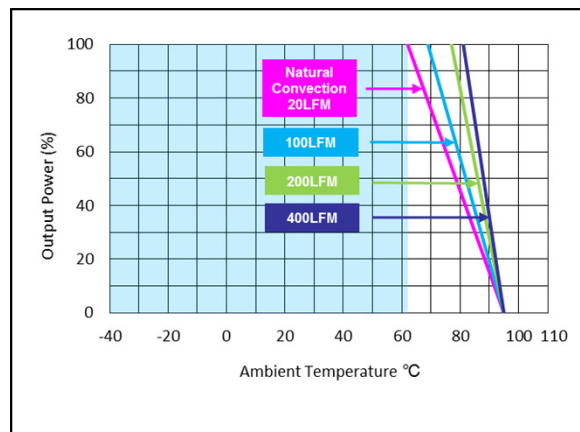


Figure 12: AEE02B12-M Derating Output Current vs Ambient Temperature  
Vin = 12Vdc Load: Io = 1.67A

## AEE02C12-M Performance Curves

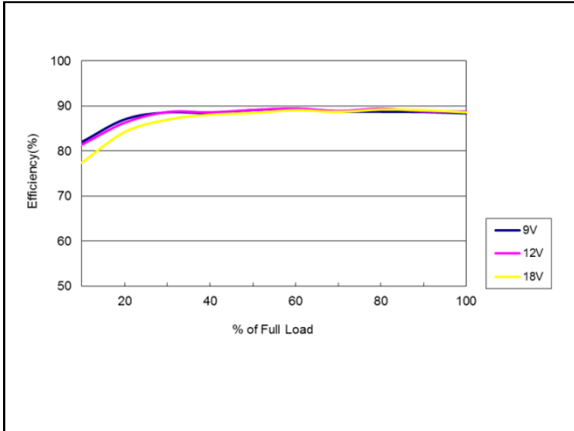


Figure 13: AEE02C12-M Efficiency Versus Output Current Curve  
Vin = 9 to 18Vdc Load: Io = 0 to 1.33A

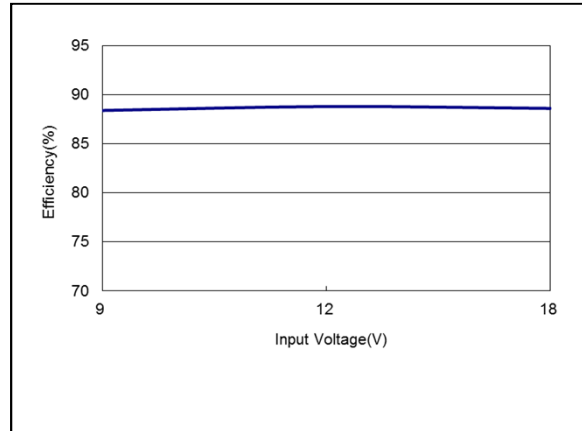


Figure 14: AEE02C12-M Efficiency Versus Input Voltage Curve  
Vin = 9 to 18Vdc Load: Io = 1.33A

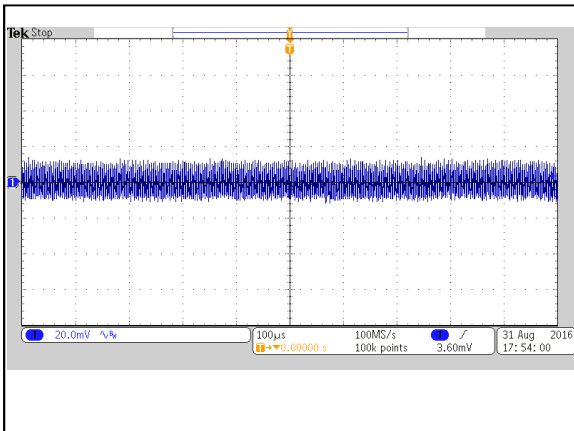


Figure 15: AEE02C12-M Ripple and Noise Measurement  
Vin = 12Vdc Load: Io = 1.33A  
Ch 1: Vo

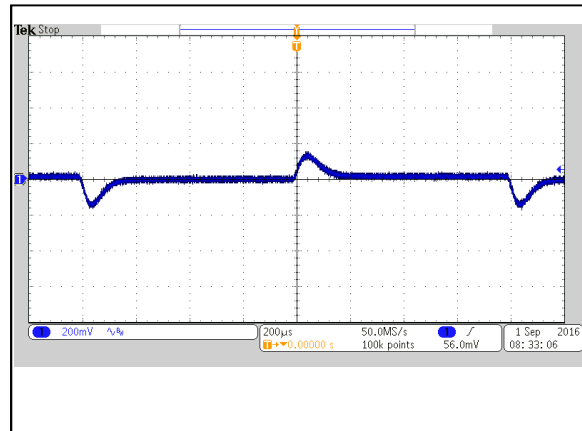


Figure 16: AEE02C12-M Transient Response  
Vin = 12Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

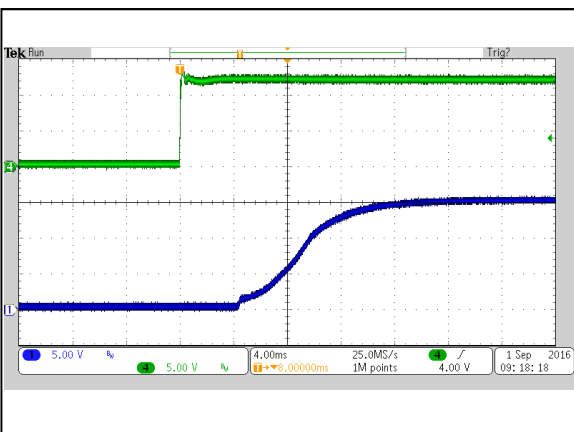


Figure 17: AEE02C12-M Output Voltage Startup Characteristic by Vin  
Vin = 12Vdc Load: Io = 1.33A  
Ch1: Vo Ch4: Vin

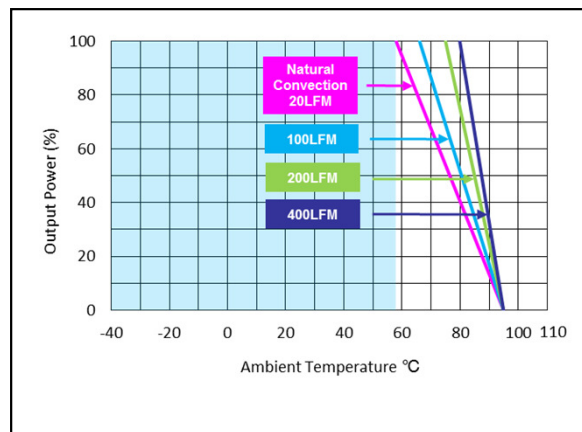


Figure 18: AEE02C12-M Derating Output Current vs Ambient Temperature  
Vin = 12Vdc Load: Io = 1.33A

## AEE02H12-M Performance Curves

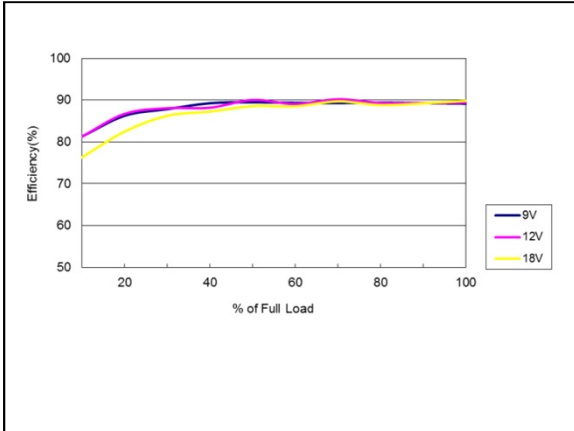


Figure 19: AEE02H12-M Efficiency Versus Output Current Curve  
Vin = 9 to 18Vdc Load: Io = 0 to 0.84A

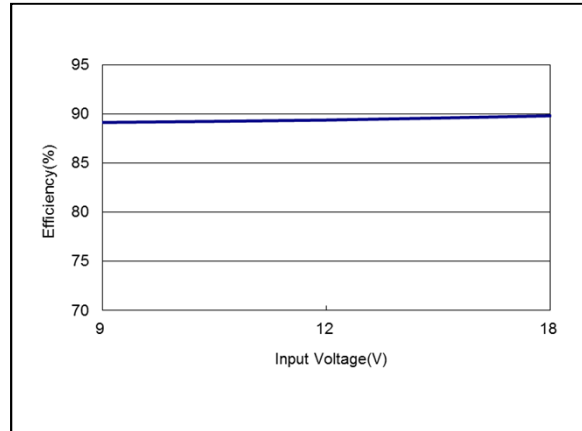


Figure 20: AEE02H12-M Efficiency Versus Input Voltage Curve  
Vin = 9 to 18Vdc Load: Io = 0.84A

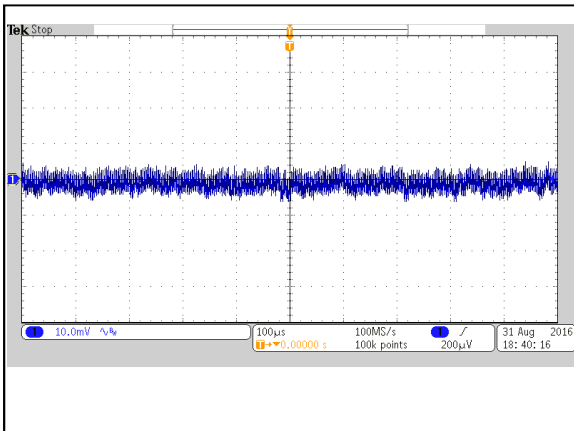


Figure 21: AEE02H12-M Ripple and Noise Measurement  
Vin = 12Vdc Load: Io = 0.84A  
Ch 1: Vo

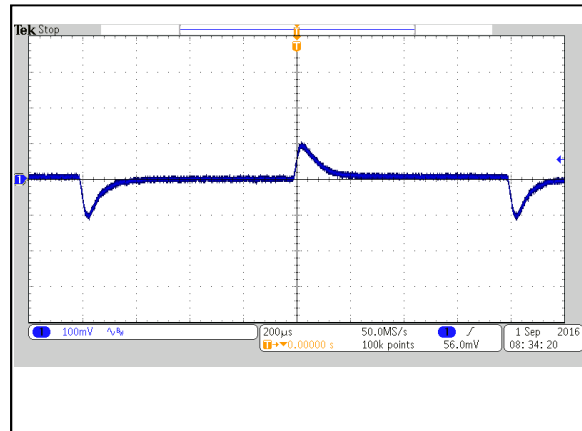


Figure 22: AEE02H12-M Transient Response  
Vin = 12Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

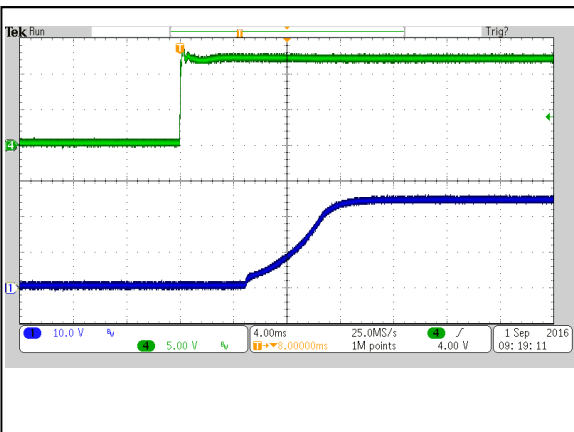


Figure 23: AEE02H12-M Output Voltage Startup Characteristic by Vin  
Vin = 12Vdc Load: Io = 0.84A  
Ch1: Vo Ch4: Vin

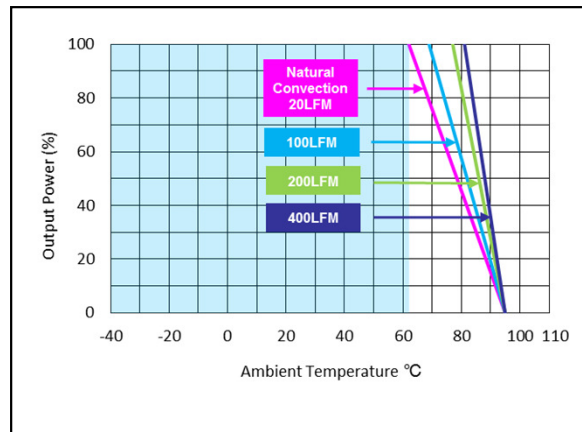


Figure 24: AEE02H12-M Derating Output Current vs Ambient Temperature  
Vin = 12Vdc Load: Io = 0.84A

## AEE02BB12-M Performance Curves

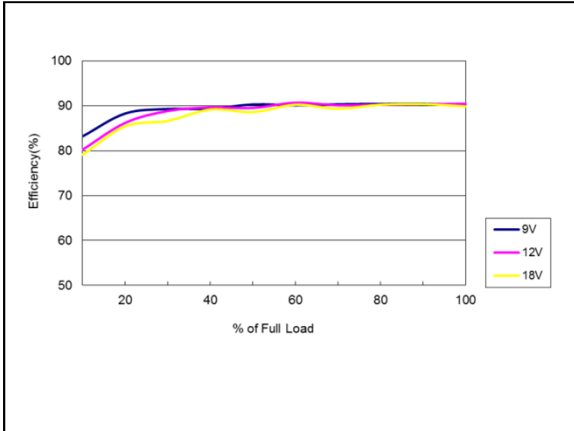


Figure 25: AEE02BB12-M Efficiency Versus Output Current Curve  
Vin = 9 to 18Vdc Load:  $I_o = 0$  to  $\pm 0.84A$

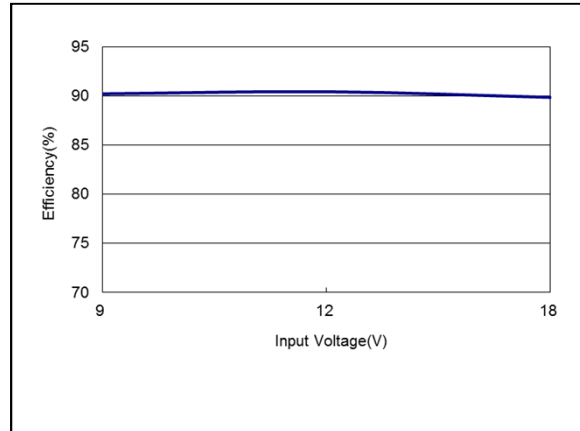


Figure 26: AEE02BB12-M Efficiency Versus Input Voltage Curve  
Vin = 9 to 18Vdc Load:  $I_o = \pm 0.84A$

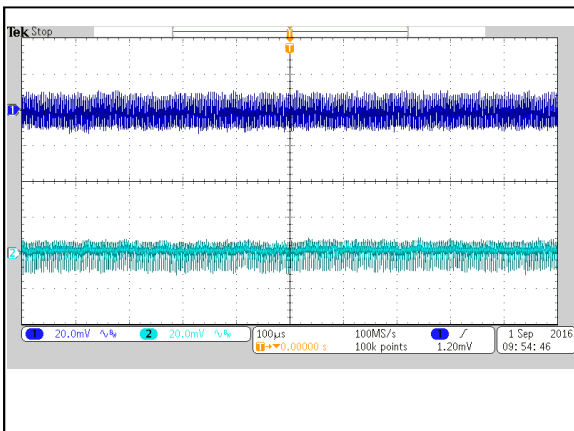


Figure 27: AEE02BB12-M Ripple and Noise Measurement  
Vin = 12Vdc Load:  $I_o = \pm 0.84A$   
Ch 1: Vo1 Ch 2: Vo2

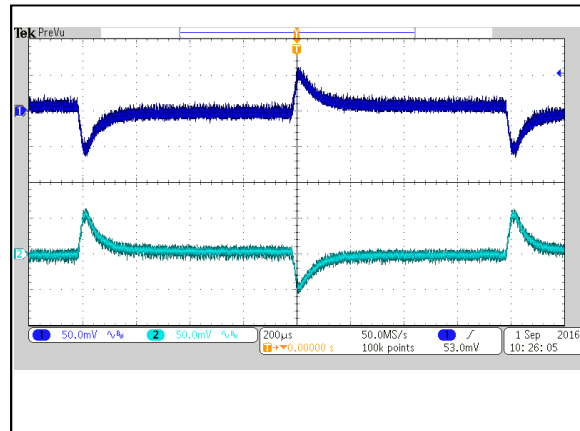


Figure 28: AEE02BB12-M Transient Response  
Vin = 12Vdc Load:  $I_o = 100\%$  to 75% load change  
Ch 1: Vo

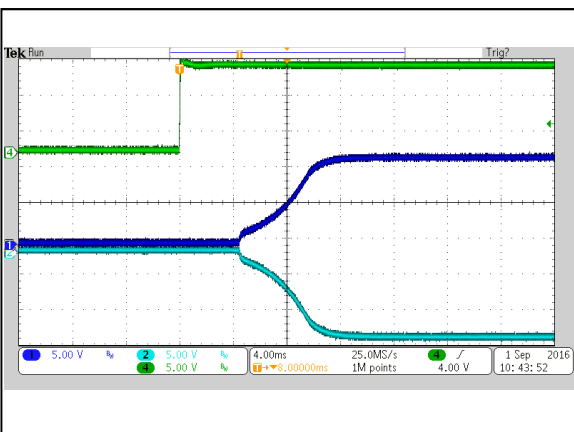


Figure 29: AEE02BB12-M Output Voltage Startup Characteristic by Vin  
Vin = 12Vdc Load:  $I_o = \pm 0.84A$   
Ch1: Vo Ch4: Vin

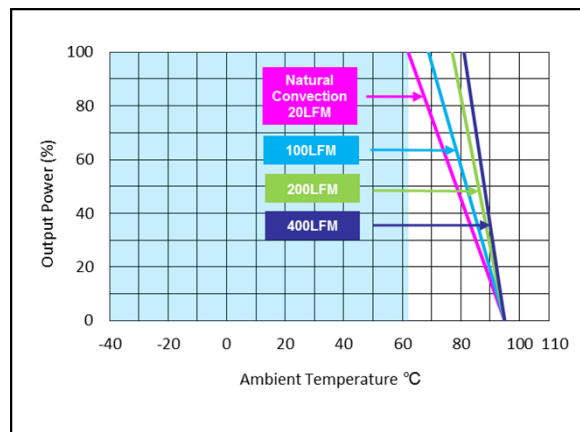


Figure 30: AEE02BB12-M Derating Output Current vs Ambient Temperature  
Vin = 12Vdc Load:  $I_o = \pm 0.84A$

## AEE02CC12-M Performance Curves

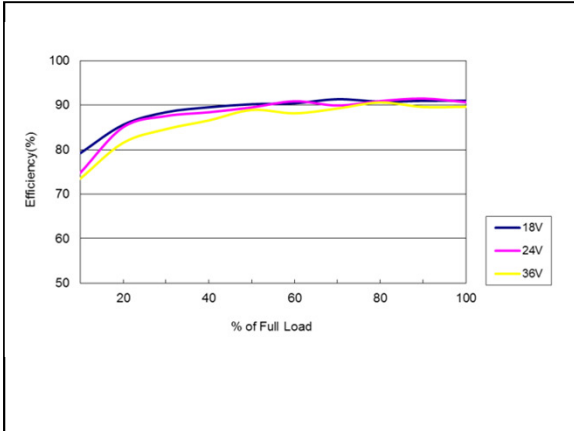


Figure 31: AEE02CC12-M Efficiency Versus Output Current Curve  
Vin = 9 to 18Vdc Load:  $I_o = 0$  to  $\pm 0.67A$

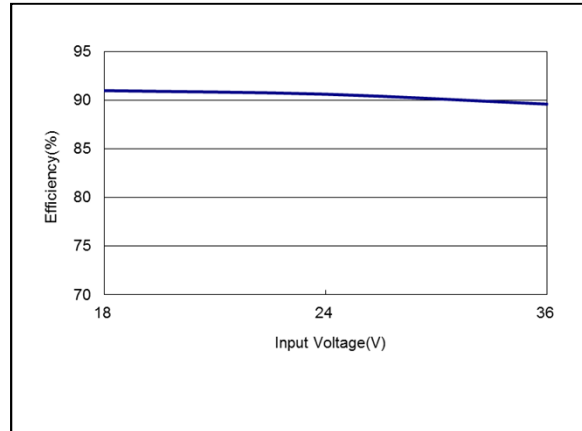


Figure 32: AEE02CC12-M Efficiency Versus Input Voltage Curve  
Vin = 9 to 18Vdc Load:  $I_o = \pm 0.67A$

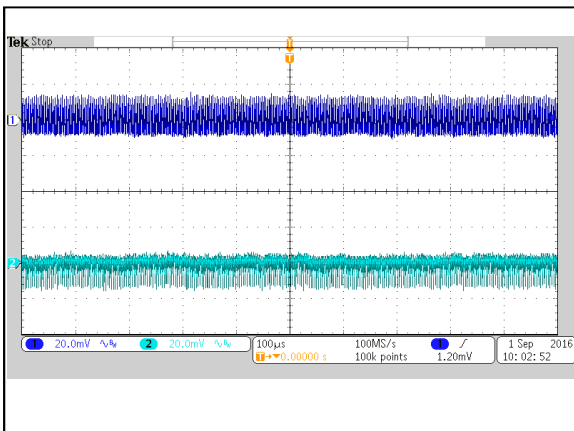


Figure 33: AEE02CC12-M Ripple and Noise Measurement  
Vin = 12Vdc Load:  $I_o = \pm 0.67A$   
Ch 1: Vo1 Ch 2: Vo2

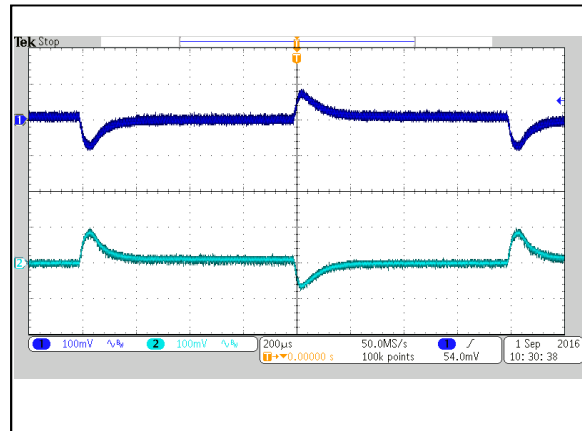


Figure 34: AEE02CC12-M Transient Response  
Vin = 12Vdc Load:  $I_o = 100\%$  to  $75\%$  load change  
Ch 1: Vo

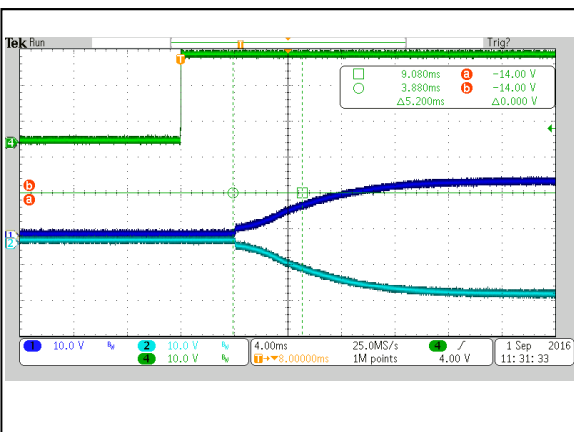


Figure 35: AEE02CC12-M Output Voltage Startup Characteristic by Vin  
Vin = 12Vdc Load:  $I_o = \pm 0.67A$   
Ch1: Vo Ch4: Vin

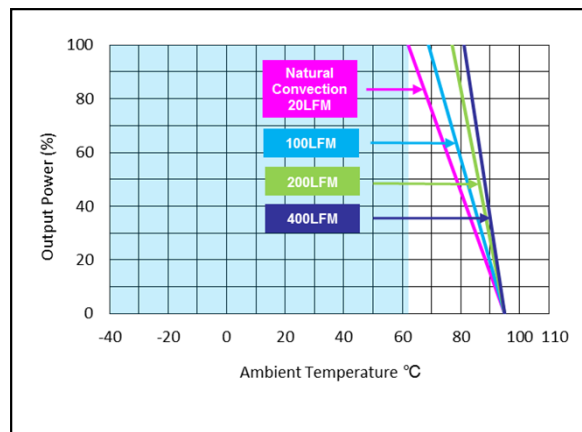


Figure 36: AEE02CC12-M Derating Output Current vs Ambient Temperature  
Vin = 12Vdc Load:  $I_o = \pm 0.67A$

## AEE04A24-M Performance Curves

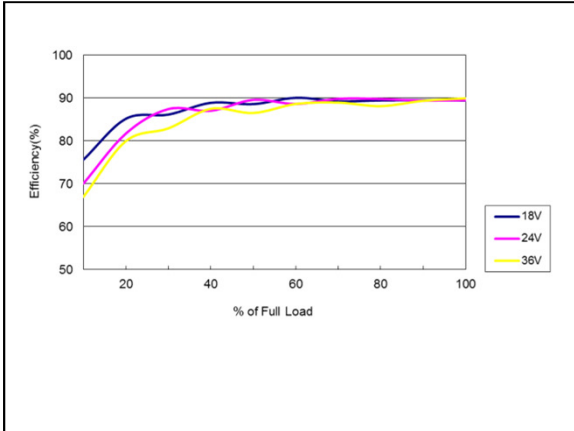


Figure 37: AEE04A24-M Efficiency Versus Output Current Curve  
Vin = 18 to 36Vdc Load: Io = 0 to 4A

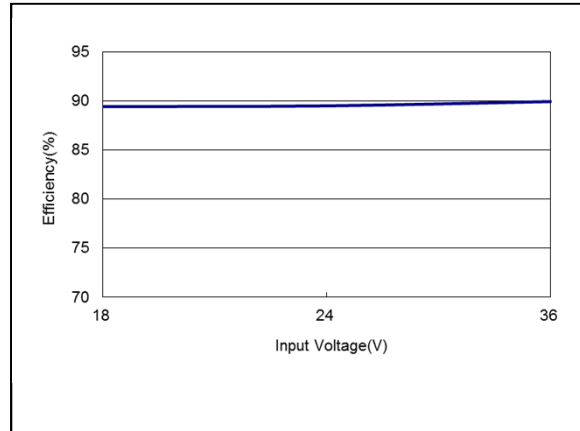


Figure 38: AEE04A24-M Efficiency Versus Input Voltage Curve  
Vin = 18 to 36Vdc Load: Io = 4A

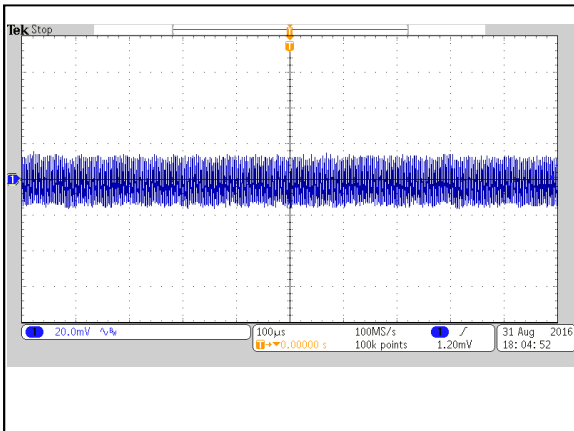


Figure 39: AEE04A24-M Ripple and Noise Measurement  
Vin = 24Vdc Load: Io = 4A  
Ch 1: Vo

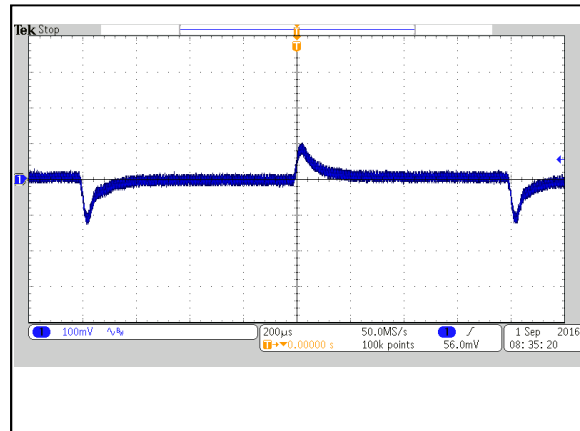


Figure 40: AEE04A24-M Transient Response  
Vin = 24Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

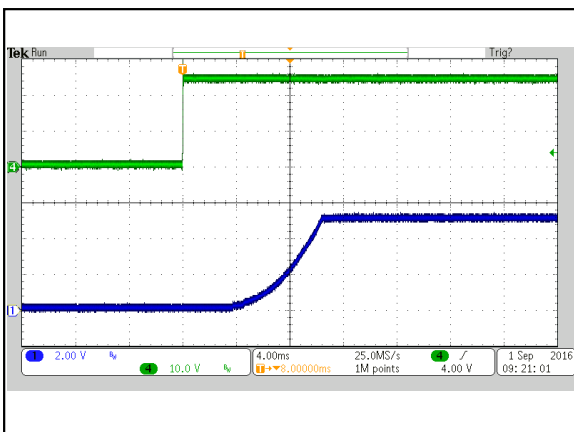


Figure 41: AEE04A24-M Output Voltage Startup Characteristic by Vin  
Vin = 24Vdc Load: Io = 4A  
Ch1: Vo Ch4: Vin

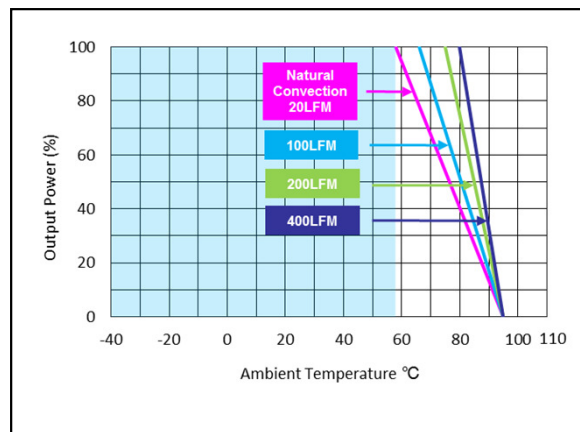


Figure 42: AEE04A24-M Derating Output Current vs Ambient Temperature  
Vin = 24Vdc Load: Io = 4A

## AEE02B24-M Performance Curves

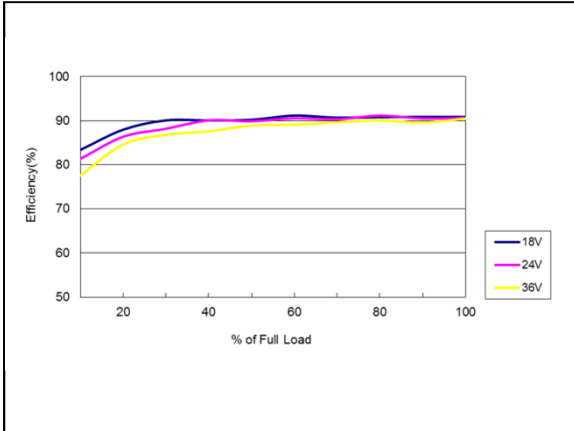


Figure 43: AEE02B24-M Efficiency Versus Output Current Curve  
Vin = 18 to 36Vdc Load: Io = 0 to 1.67A

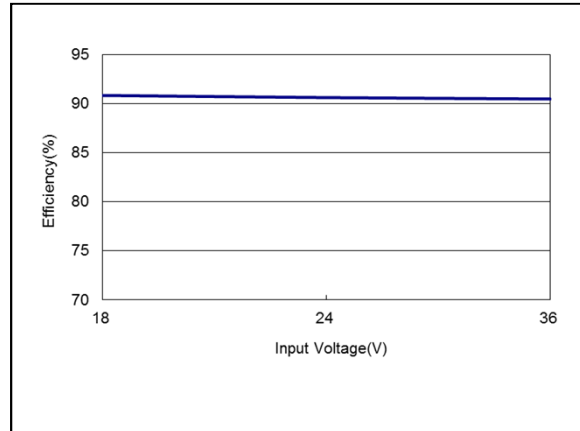


Figure 44: AEE02B24-M Efficiency Versus Input Voltage Curve  
Vin = 18 to 36Vdc Load: Io = 1.67A

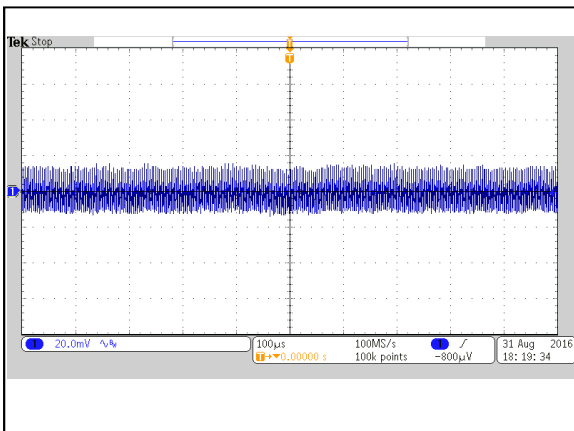


Figure 45: AEE02B24-M Ripple and Noise Measurement  
Vin = 24Vdc Load: Io = 1.67A  
Ch 1: Vo

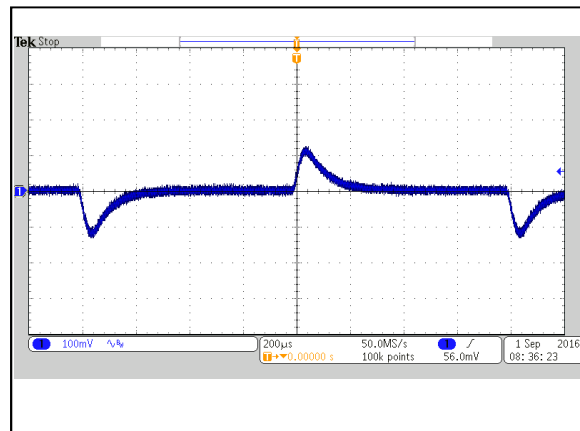


Figure 46: AEE02B24-M Transient Response  
Vin = 24Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

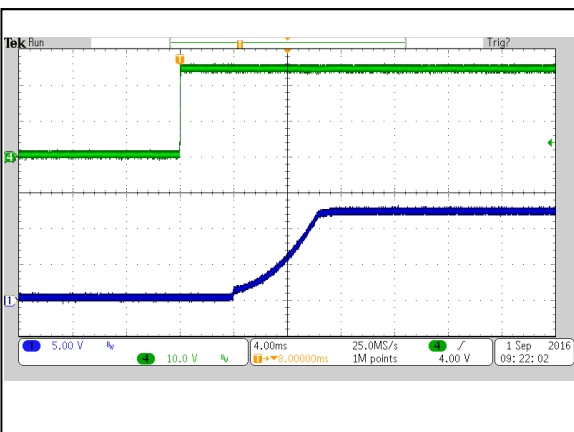


Figure 47: AEE02B24-M Output Voltage Startup Characteristic by Vin  
Vin = 24Vdc Load: Io = 1.67A  
Ch1: Vo Ch4: Vin

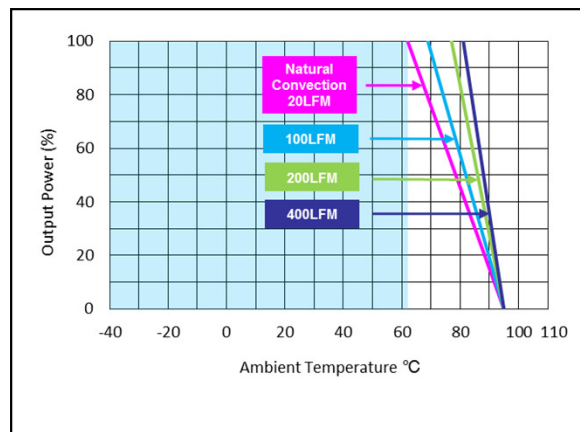


Figure 48: AEE02B24-M Derating Output Current vs Ambient Temperature  
Vin = 24Vdc Load: Io = 1.67A



## AEE02C24-M Performance Curves

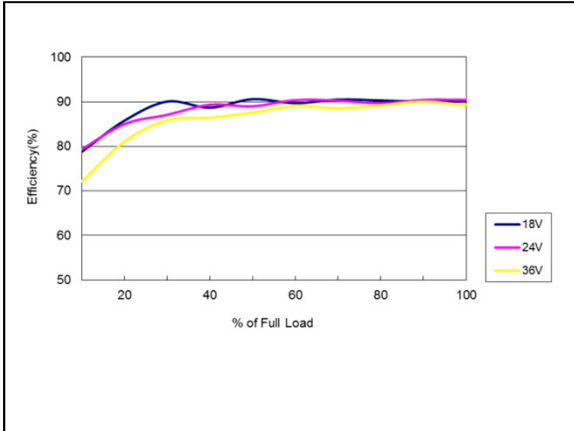


Figure 49: AEE02C24-M Efficiency Versus Output Current Curve  
Vin = 18 to 36Vdc Load: Io = 0 to 1.33A

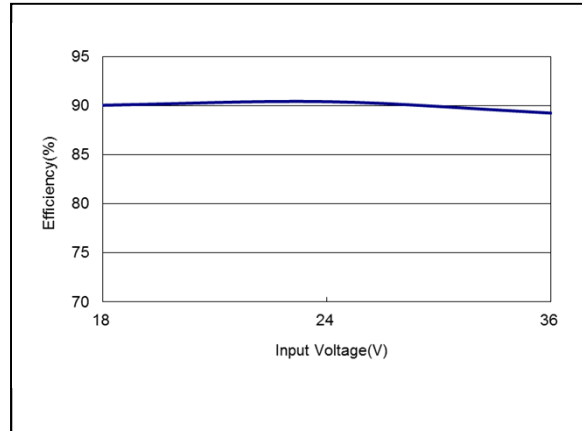


Figure 50: AEE02C24-M Efficiency Versus Input Voltage Curve  
Vin = 18 to 36Vdc Load: Io = 1.33A

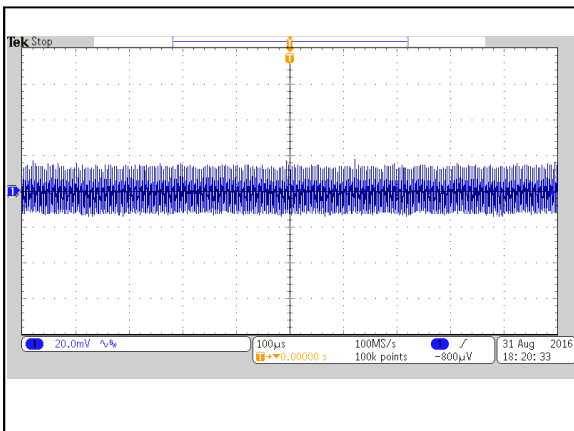


Figure 51: AEE02C24-M Ripple and Noise Measurement  
Vin = 24Vdc Load: Io = 1.33A  
Ch 1: Vo

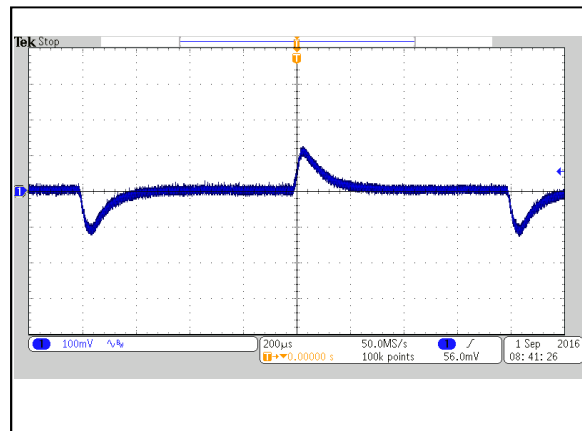


Figure 52: AEE02C24-M Transient Response  
Vin = 24Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

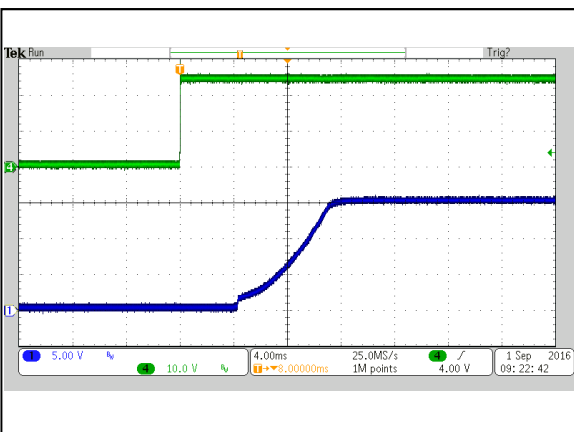


Figure 53: AEE02C24-M Output Voltage Startup Characteristic by Vin  
Vin = 24Vdc Load: Io = 1.33A  
Ch1: Vo Ch4: Vin

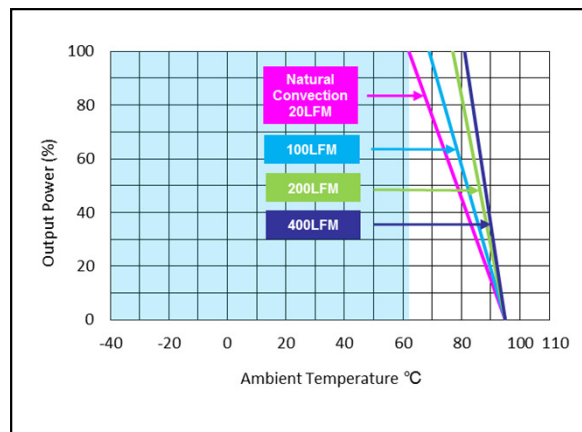


Figure 54: AEE02C24-M Derating Output Current vs Ambient Temperature  
Vin = 24Vdc Load: Io = 1.33A

## AEE02H24-M Performance Curves

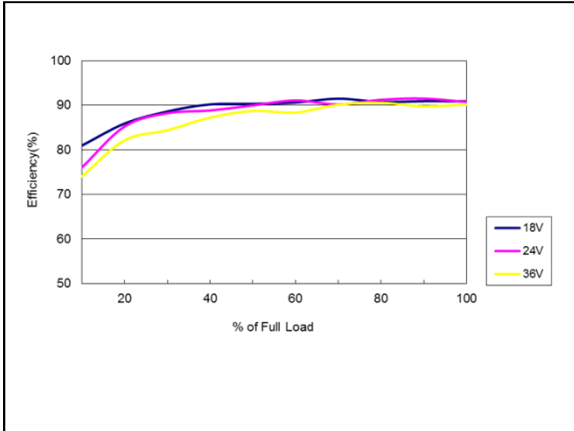


Figure 55: AEE02H24-M Efficiency Versus Output Current Curve  
Vin = 18 to 36Vdc Load: Io = 0 to 0.84A

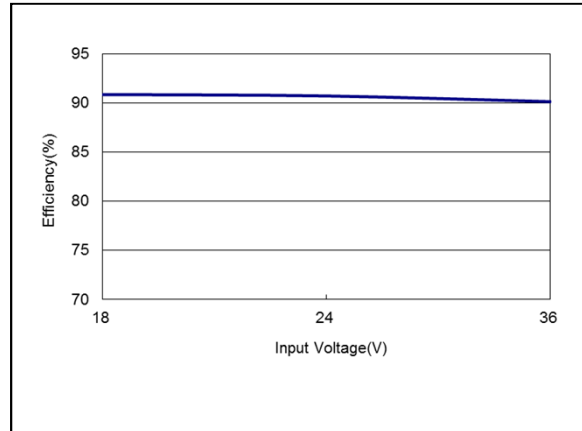


Figure 56: AEE02H24-M Efficiency Versus Input Voltage Curve  
Vin = 18 to 36Vdc Load: Io = 0.84A

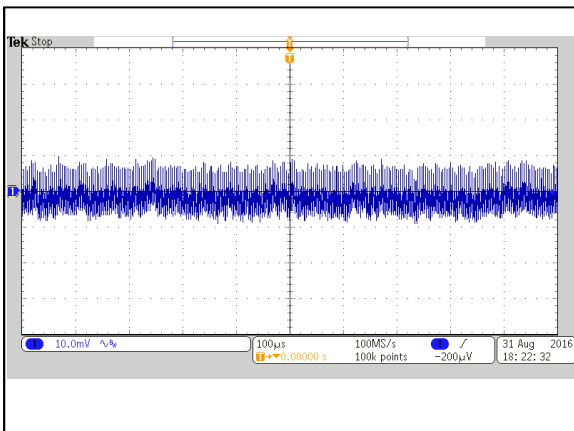


Figure 57: AEE02H24-M Ripple and Noise Measurement  
Vin = 24Vdc Load: Io = 0.84A  
Ch 1: Vo

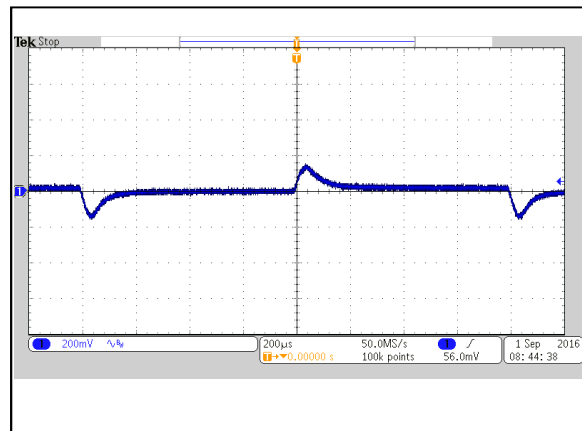


Figure 58: AEE02H24-M Transient Response  
Vin = 24Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

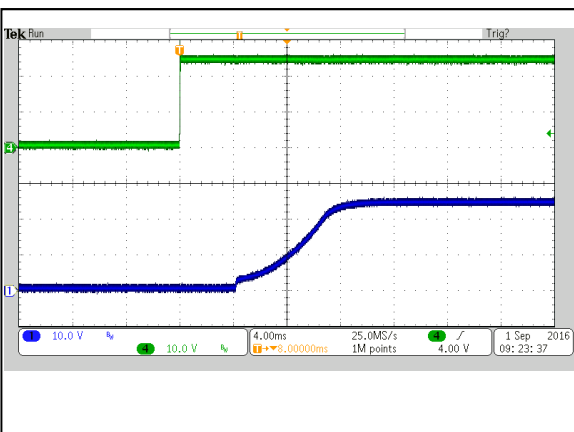


Figure 59: AEE02H24-M Output Voltage Startup Characteristic by Vin  
Vin = 24Vdc Load: Io = 0.84A  
Ch1: Vo Ch4: Vin

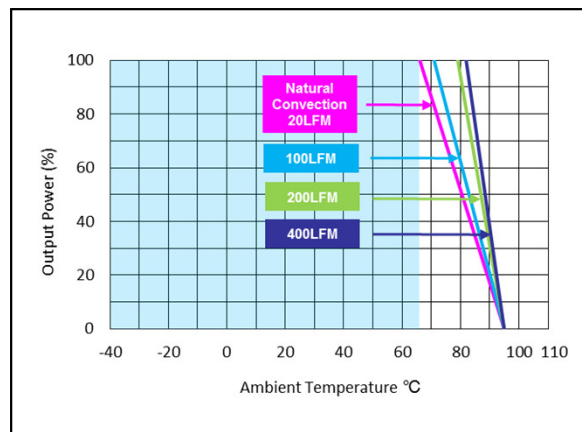


Figure 60: AEE02H24-M Derating Output Current vs Ambient Temperature  
Vin = 24Vdc Load: Io = 0.84A

## AEE02BB24-M Performance Curves

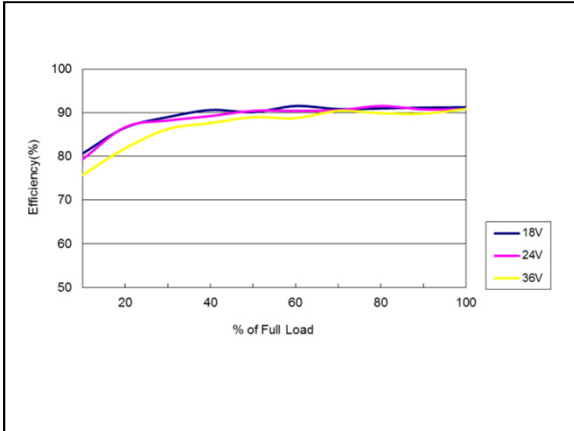


Figure 61: AEE02BB24-M Efficiency Versus Output Current Curve  
Vin = 18 to 36Vdc Load: Io = 0 to ±0.84A

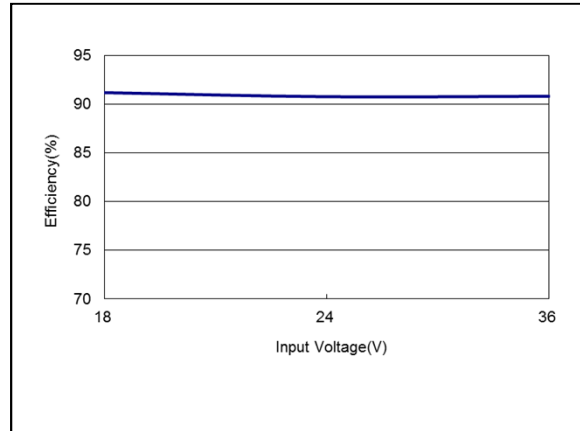


Figure 62: AEE02BB24-M Efficiency Versus Input Voltage Curve  
Vin = 18 to 36Vdc Load: Io = ±0.84A

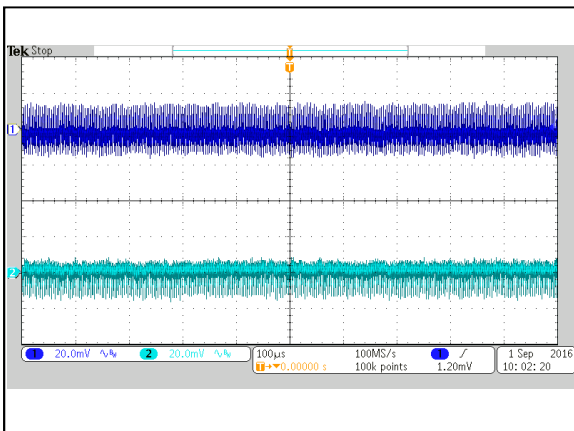


Figure 63: AEE02BB24-M Ripple and Noise Measurement  
Vin = 24Vdc Load: Io = ±0.84A  
Ch 1: Vo1 Ch2:Vo2

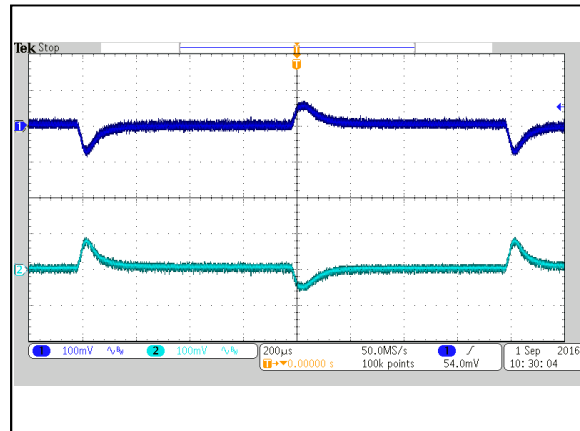


Figure 64: AEE02BB24-M Transient Response  
Vin = 24Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

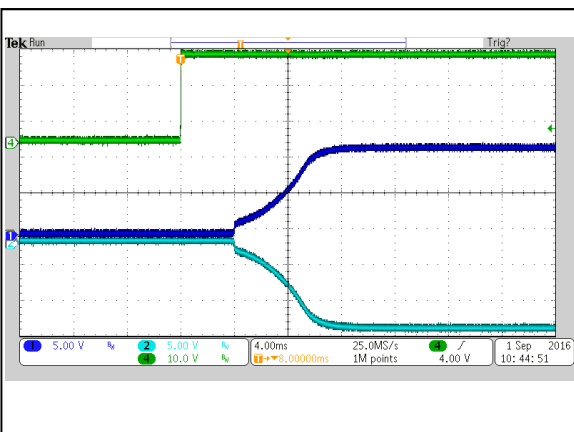


Figure 65: AEE02BB24-M Output Voltage Startup Characteristic by Vin  
Vin = 24Vdc Load: Io = ±0.84A  
Ch1: Vo Ch4: Vin

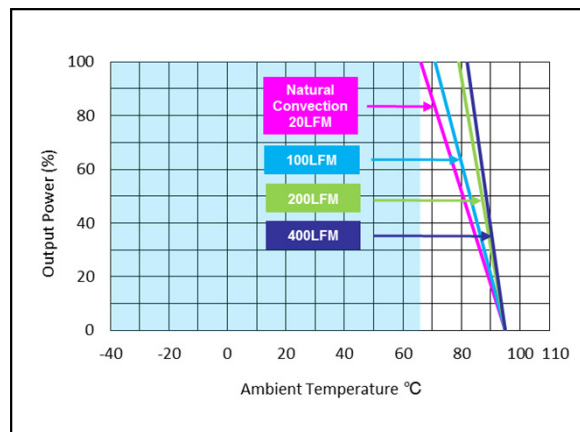


Figure 66: AEE02BB24-M Derating Output Current vs Ambient Temperature  
Vin = 24Vdc Load: Io = ±0.84A

## AEE02CC24-M Performance Curves

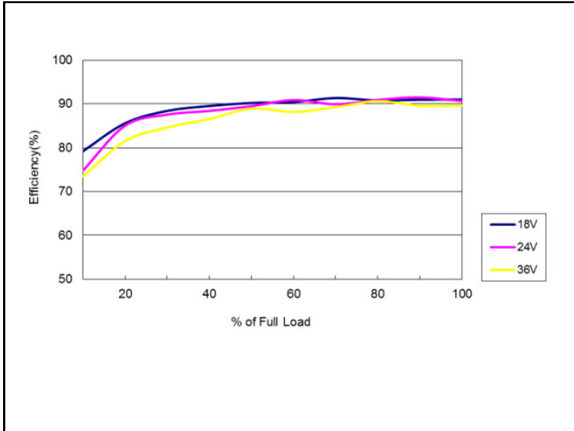


Figure 67: AEE02CC24-M Efficiency Versus Output Current Curve  
Vin = 18 to 36Vdc Load: Io = 0 to ±0.67A

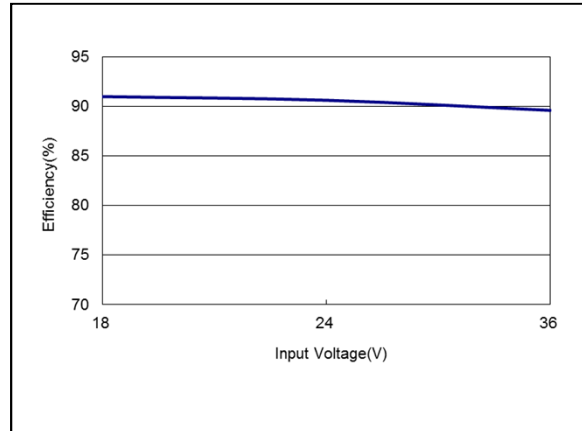


Figure 68: AEE02CC24-M Efficiency Versus Input Voltage Curve  
Vin = 18 to 36Vdc Load: Io = ±0.67A

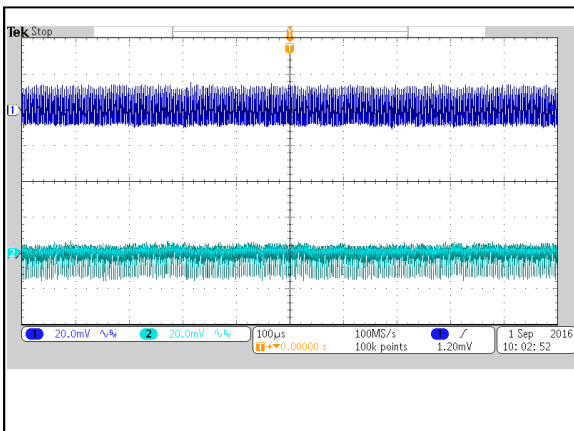


Figure 69: AEE02CC24-M Ripple and Noise Measurement  
Vin = 24Vdc Load: Io = ±0.67A  
Ch 1: Vo1 Ch 2: Vo2

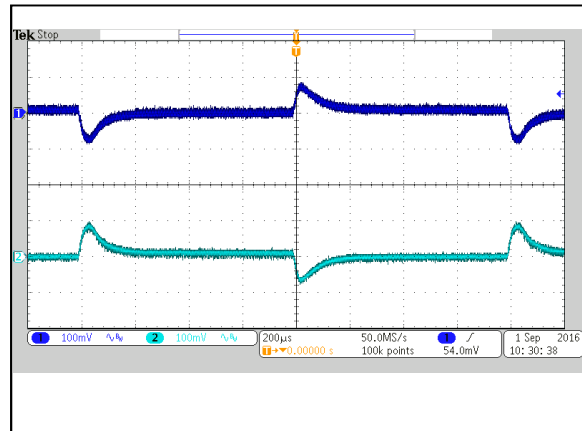


Figure 70: AEE02CC24-M Transient Response  
Vin = 24Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

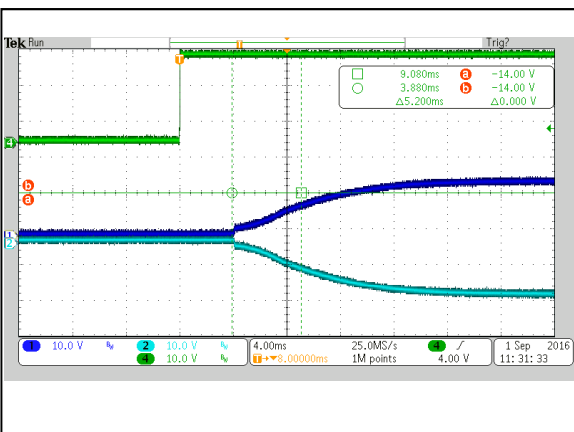


Figure 71: AEE02CC24-M Output Voltage Startup Characteristic by Vin  
Vin = 24Vdc Load: Io = ±0.67A  
Ch1: Vo Ch4: Vin

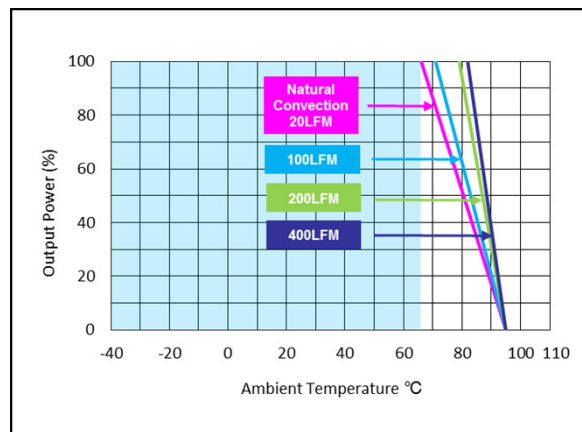


Figure 72: AEE02CC24-M Derating Output Current vs Ambient Temperature  
Vin = 24Vdc Load: Io = ±0.67A

## AEE04A48-M Performance Curves

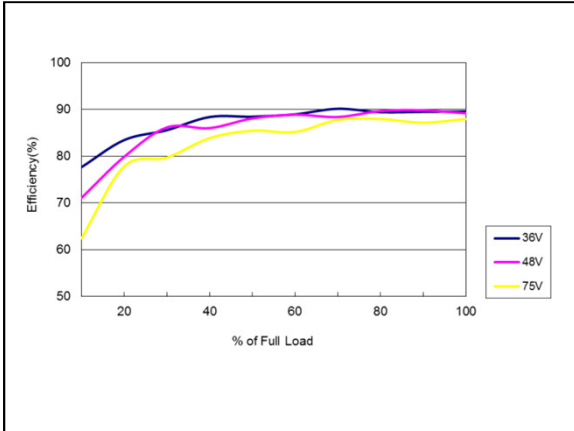


Figure 73: AEE04A48-M Efficiency Versus Output Current Curve  
Vin = 36 to 75Vdc Load: Io = 0 to 4A

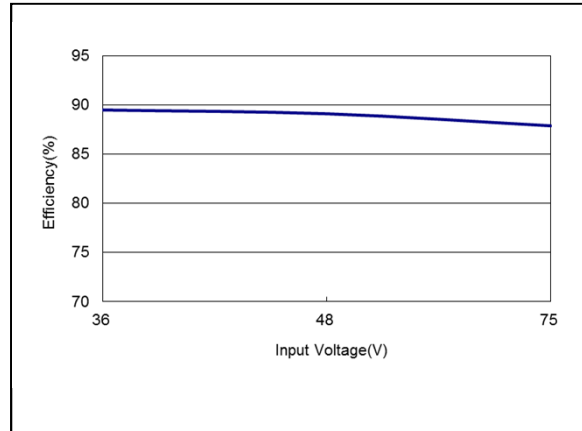


Figure 74: AEE04A48-M Efficiency Versus Input Voltage Curve  
Vin = 36 to 75Vdc Load: Io = 4A

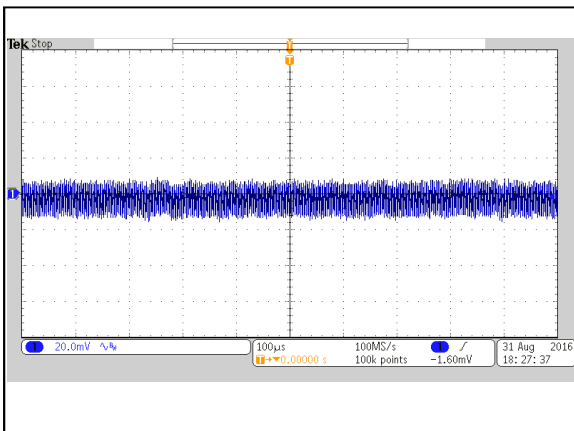


Figure 75: AEE04A48-M Ripple and Noise Measurement  
Vin = 48Vdc Load: Io = 4A  
Ch 1: Vo

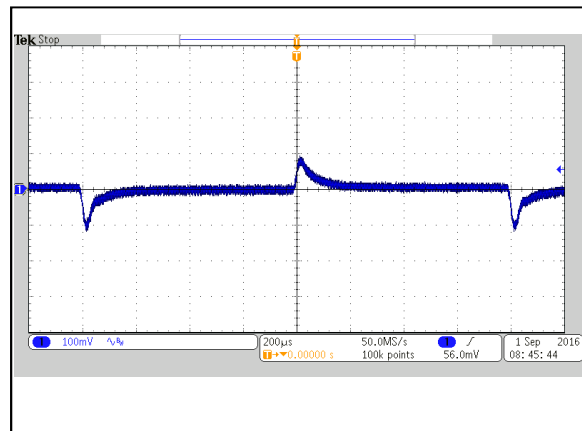


Figure 76: AEE04A48-M Transient Response  
Vin = 48Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

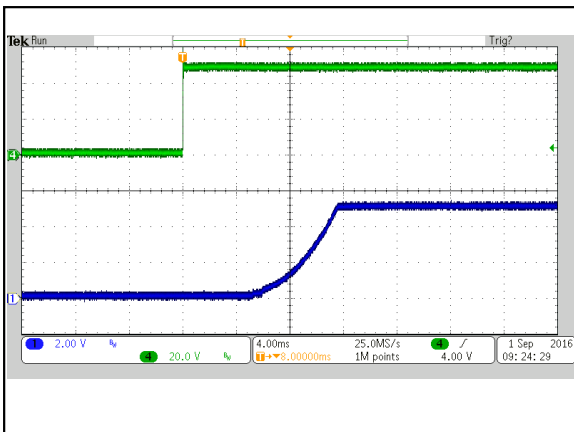


Figure 77: AEE04A48-M Output Voltage Startup Characteristic by Vin  
Vin = 48Vdc Load: Io = 4A  
Ch1: Vo Ch4: Vin

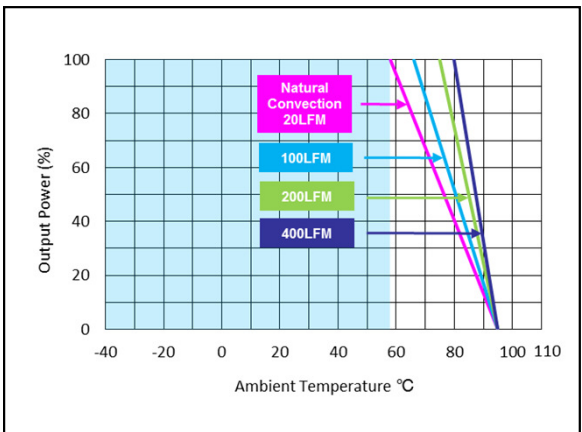


Figure 78: AEE04A48-M Derating Output Current vs Ambient Temperature  
Vin = 48Vdc Load: Io = 4A

## AEE02B48-M Performance Curves

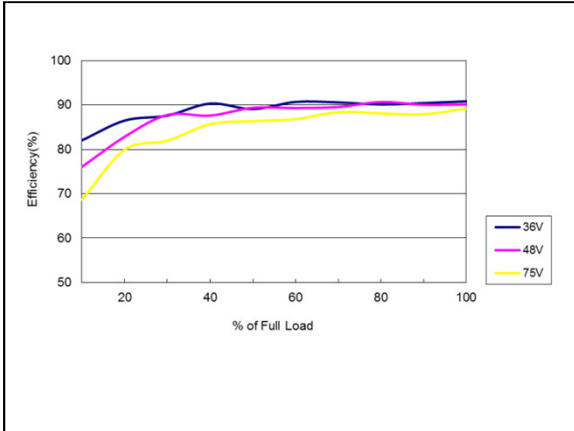


Figure 79: AEE02B48-M Efficiency Versus Output Current Curve  
Vin = 36 to 75Vdc Load: Io = 0 to 1.67A

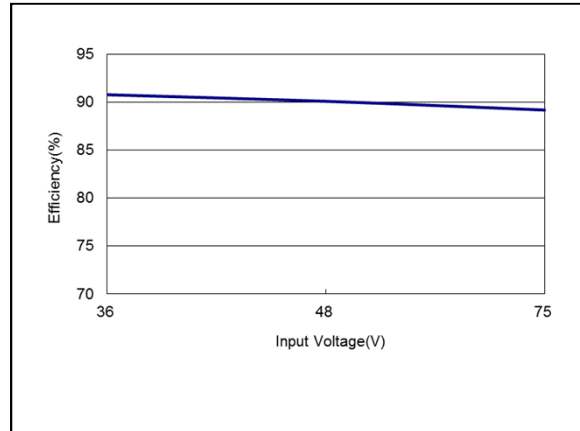


Figure 80: AEE02B48-M Efficiency Versus Input Voltage Curve  
Vin = 36 to 75Vdc Load: Io = 1.67A

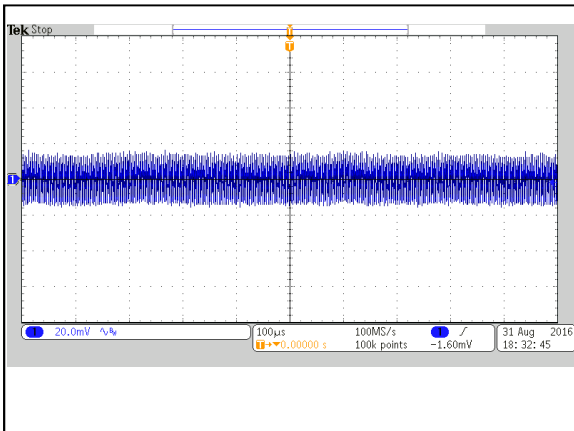


Figure 81: AEE02B48-M Ripple and Noise Measurement  
Vin = 48Vdc Load: Io = 1.67A  
Ch 1: Vo

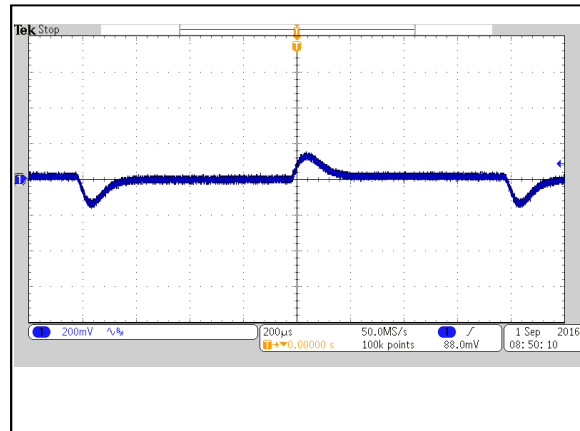


Figure 82: AEE02B48-M Transient Response  
Vin = 48Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

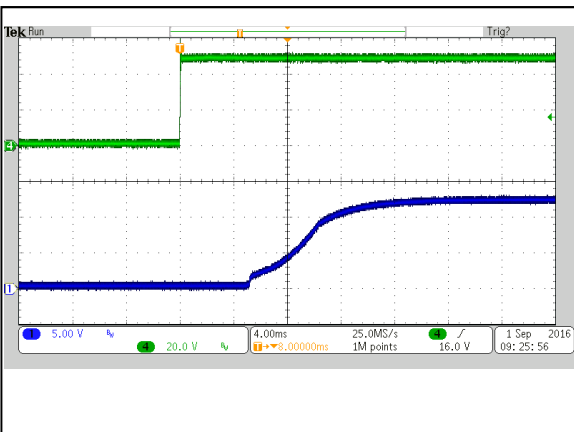


Figure 83: AEE02B48-M Output Voltage Startup Characteristic by Vin  
Vin = 48Vdc Load: Io = 1.67A  
Ch1: Vo Ch4: Vin

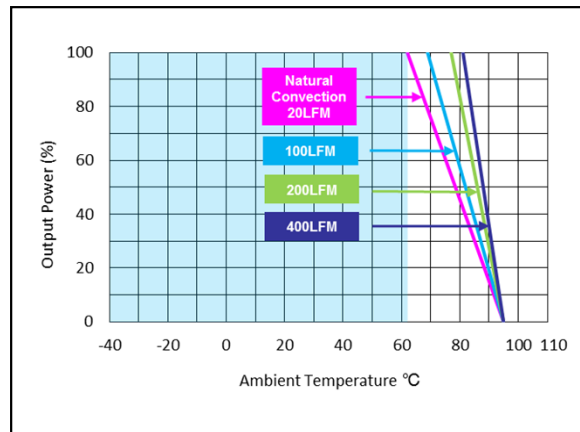


Figure 84: AEE02B48-M Derating Output Current vs Ambient Temperature  
Vin = 48Vdc Load: Io = 1.67A

## AEE02C48-M Performance Curves

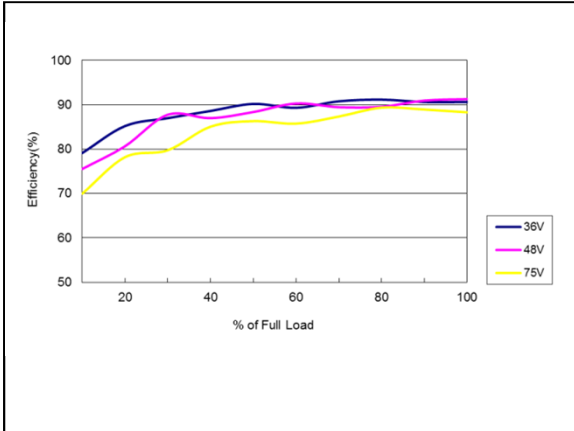


Figure 85: AEE02C48-M Efficiency Versus Output Current Curve  
Vin = 36 to 75Vdc Load: Io = 0 to 1.33A

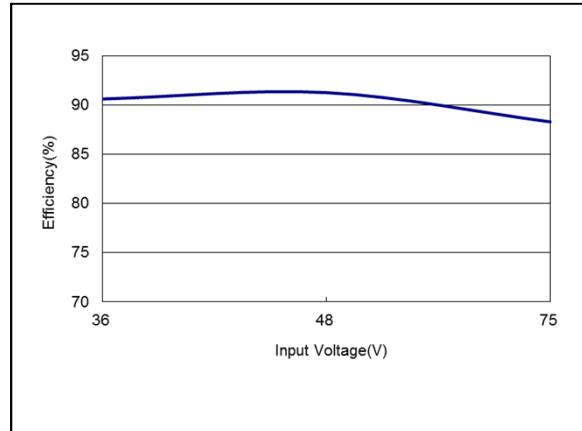


Figure 86: AEE02C48-M Efficiency Versus Input Voltage Curve  
Vin = 36 to 75Vdc Load: Io = 1.33A

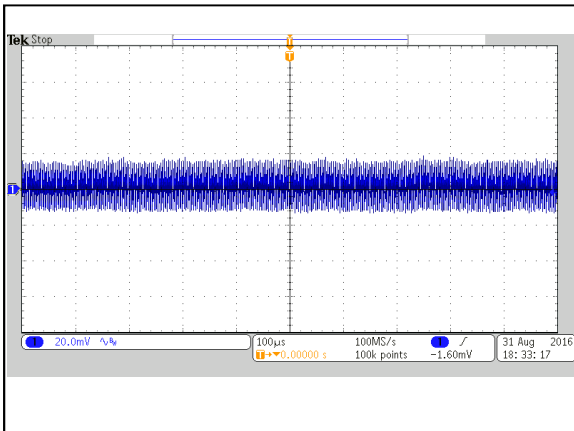


Figure 87: AEE02C48-M Ripple and Noise Measurement  
Vin = 48Vdc Load: Io = 1.33A  
Ch 1: Vo

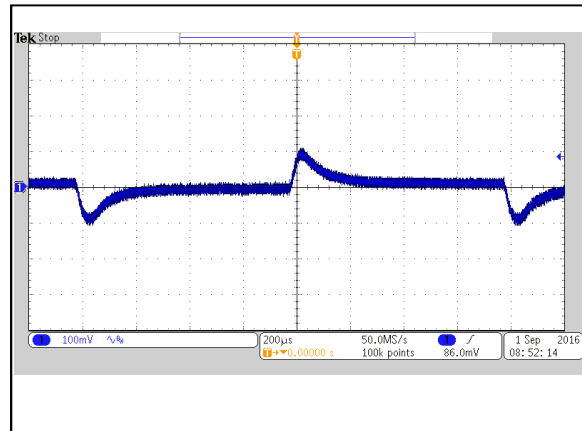


Figure 88: AEE02C48-M Transient Response  
Vin = 48Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

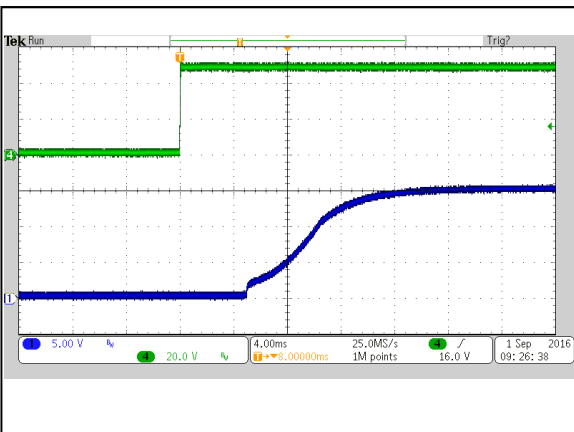


Figure 89: AEE02C48-M Output Voltage Startup Characteristic by Vin  
Vin = 48Vdc Load: Io = 1.33A  
Ch1: Vo Ch4: Vin

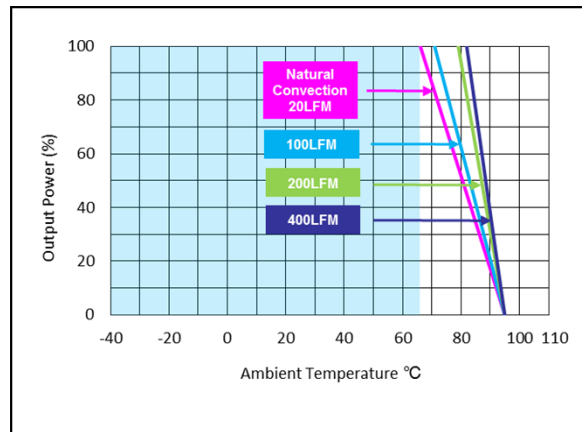


Figure 90: AEE02C48-M Derating Output Current vs Ambient Temperature  
Vin = 48Vdc Load: Io = 1.33A

## AEE02H48-M Performance Curves

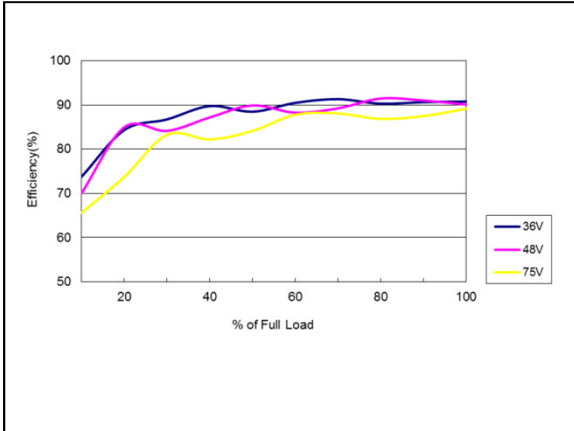


Figure 91: AEE02H48-M Efficiency Versus Output Current Curve  
Vin = 36 to 75Vdc Load: Io = 0 to 0.84A

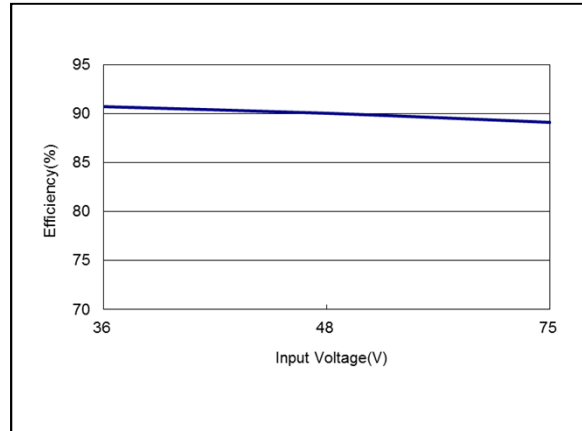


Figure 92: AEE02H48-M Efficiency Versus Input Voltage Curve  
Vin = 36 to 75Vdc Load: Io = 0.84A

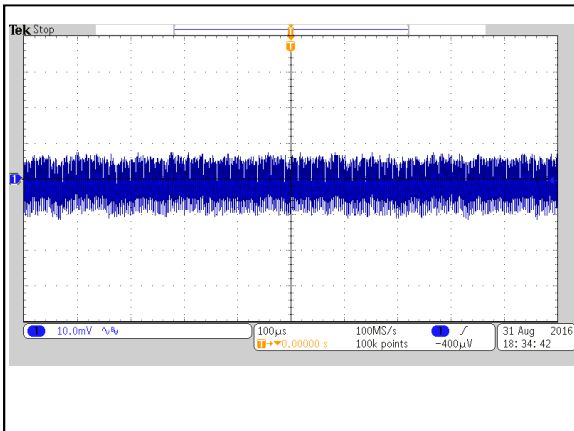


Figure 93: AEE02H48-M Ripple and Noise Measurement  
Vin = 48Vdc Load: Io = 0.84A  
Ch 1: Vo

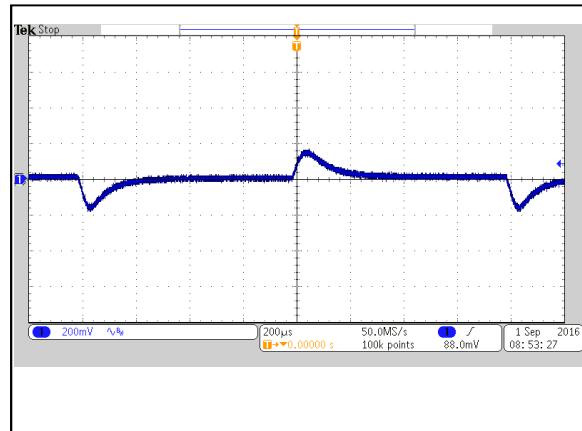


Figure 94: AEE02H48-M Transient Response  
Vin = 48Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

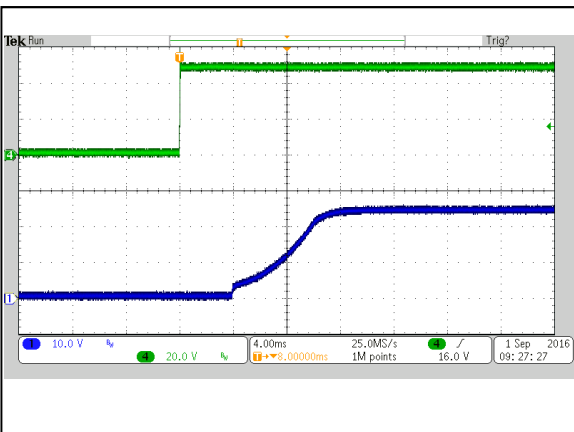


Figure 95: AEE02H48-M Output Voltage Startup Characteristic by Vin  
Vin = 48Vdc Load: Io = 0.84A  
Ch1: Vo Ch4: Vin

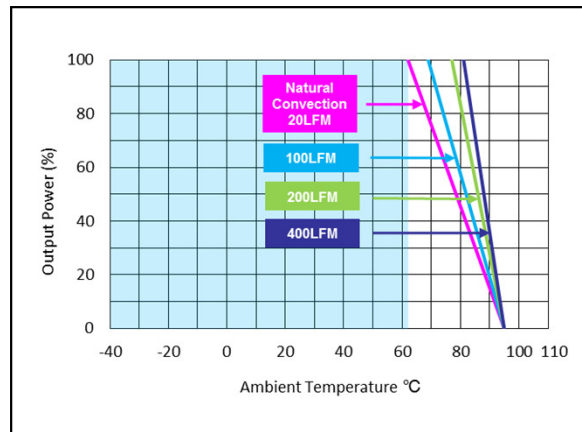


Figure 96: AEE02H48-M Derating Output Current vs Ambient Temperature  
Vin = 48Vdc Load: Io = 0.84A



## AEE02BB48-M Performance Curves

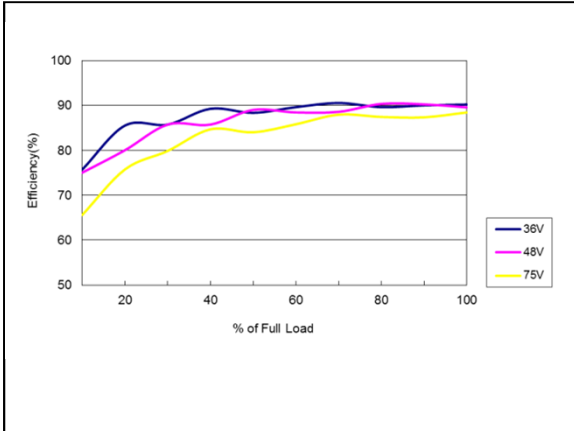


Figure 97: AEE02BB48-M Efficiency Versus Output Current Curve  
Vin = 36 to 75Vdc Load:  $I_o = 0$  to  $\pm 0.84A$

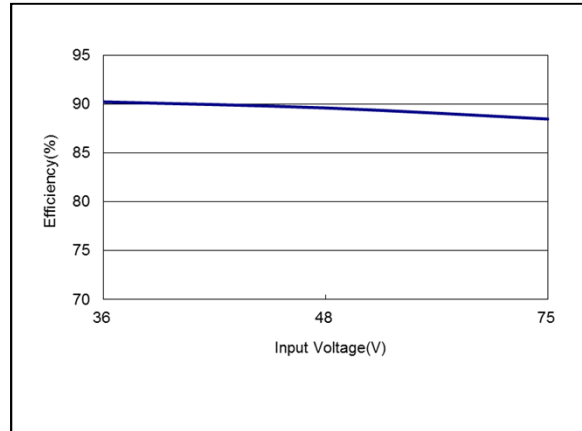


Figure 98: AEE02BB48-M Efficiency Versus Input Voltage Curve  
Vin = 36 to 75Vdc Load:  $I_o = \pm 0.84A$

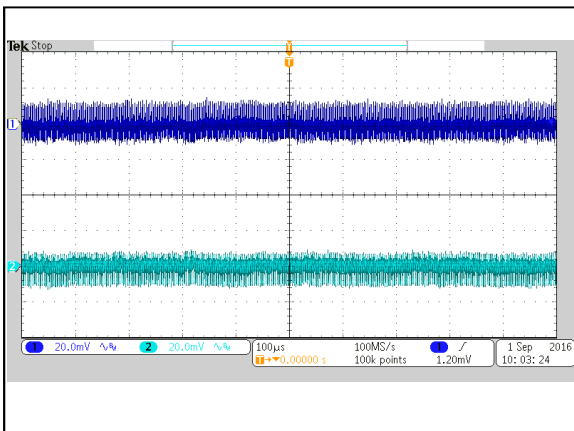


Figure 99: AEE02BB48-M Ripple and Noise Measurement  
Vin = 48Vdc Load:  $I_o = \pm 0.84A$   
Ch 1: Vo1 Ch 2: Vo2

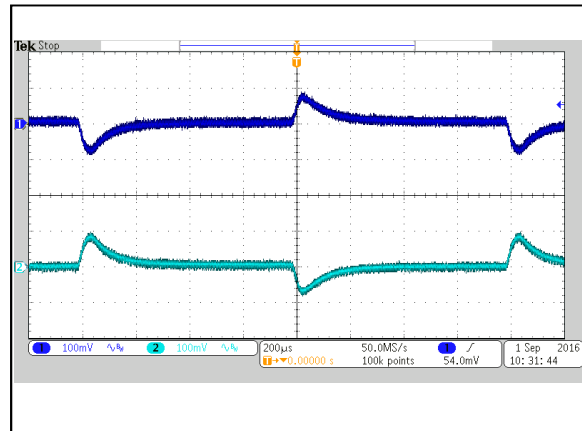


Figure 100: AEE02BB48-M Transient Response  
Vin = 48Vdc Load:  $I_o = 100\%$  to 75% load change  
Ch 1: Vo

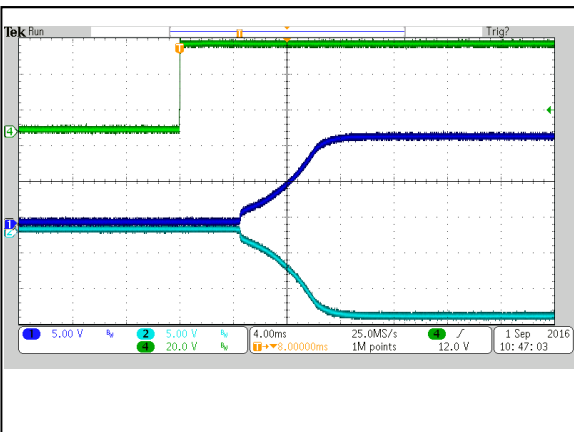


Figure 101: AEE02BB48-M Output Voltage Startup Characteristic by Vin  
Vin = 48Vdc Load:  $I_o = \pm 0.84A$   
Ch1: Vo Ch4: Vin

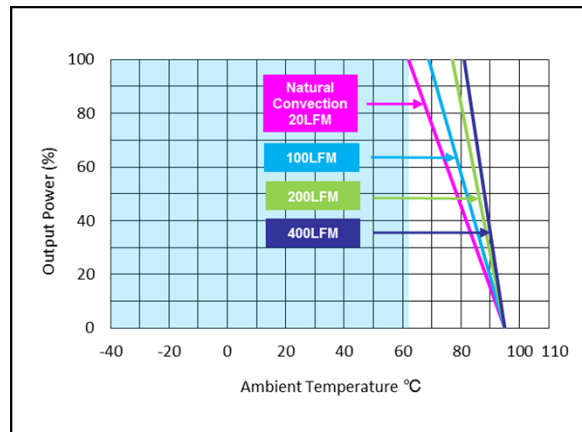


Figure 102: AEE02BB48-M Derating Output Current vs Ambient Temperature  
Vin = 48Vdc Load:  $I_o = \pm 0.84A$

## AEE02CC48-M Performance Curves

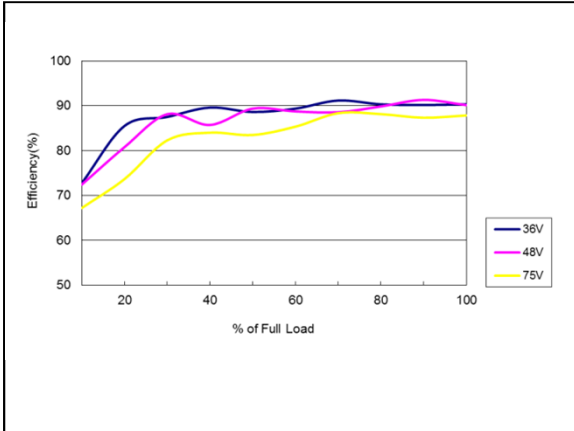


Figure 103: AEE02CC48-M Efficiency Versus Output Current Curve  
Vin = 36 to 75Vdc Load: Io = 0 to ±0.67A

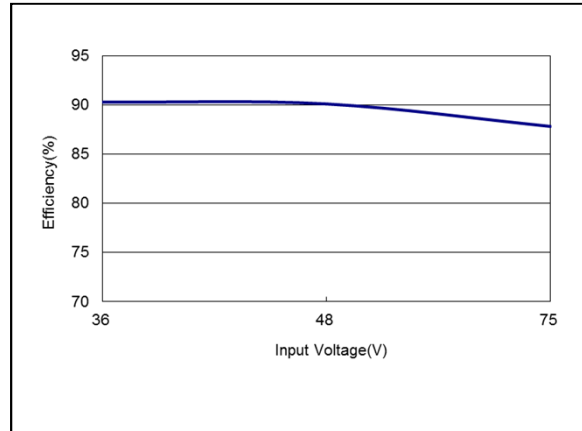


Figure 104: AEE02CC48-M Efficiency Versus Input Voltage Curve  
Vin = 36 to 75Vdc Load: Io = ±0.67A

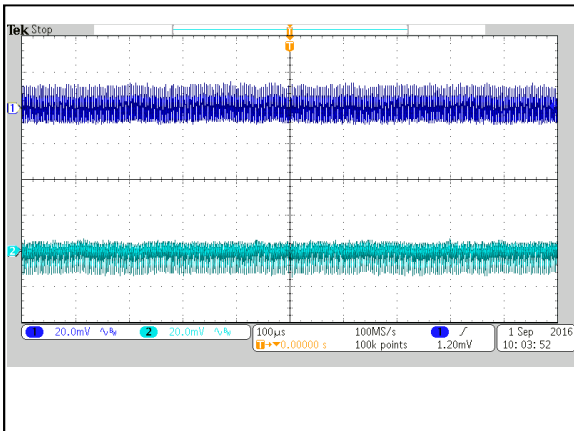


Figure 105: AEE02CC48-M Ripple and Noise Measurement  
Vin = 48Vdc Load: Io = ±0.67A  
Ch 1: Vo1 Ch2: Vo2

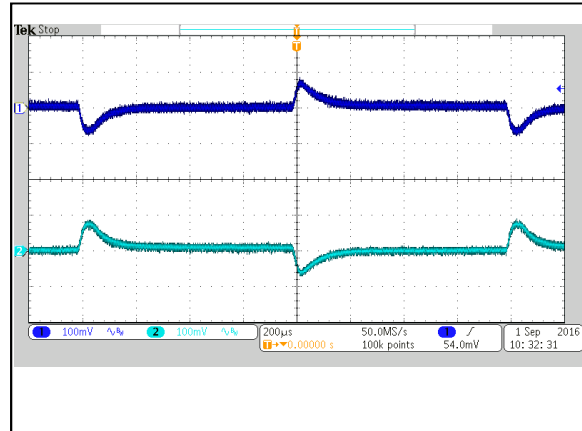


Figure 106: AEE02CC48-M Transient Response  
Vin = 48Vdc Load: Io = 100% to 75% load change  
Ch 1: Vo

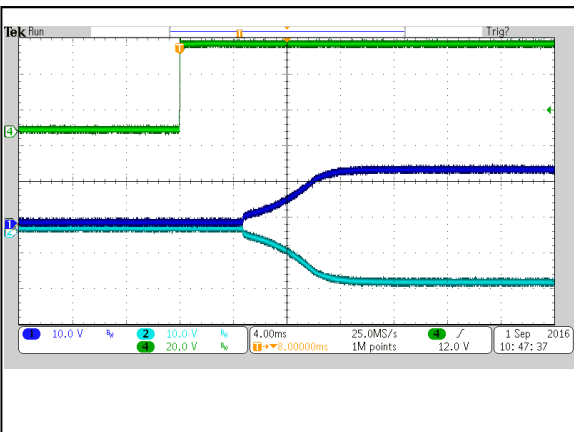


Figure 107: AEE02CC48-M Output Voltage Startup Characteristic by Vin  
Vin = 48Vdc Load: Io = ±0.67A  
Ch1: Vo Ch4: Vin


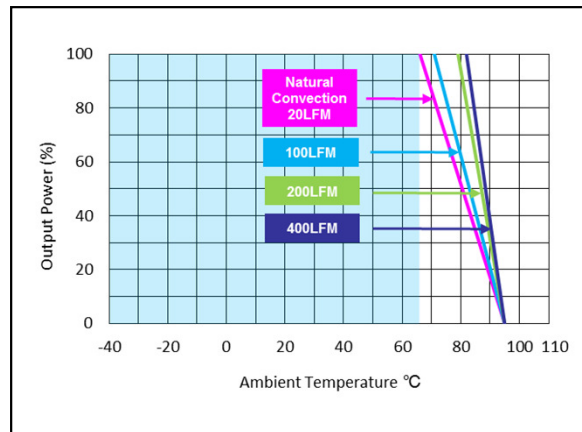


Figure 108: AEE02CC48-M Derating Output Current vs Ambient Temperature  
Vin = 48Vdc Load: Io = ±0.67A

## Mechanical Specifications

### Mechanical Outlines

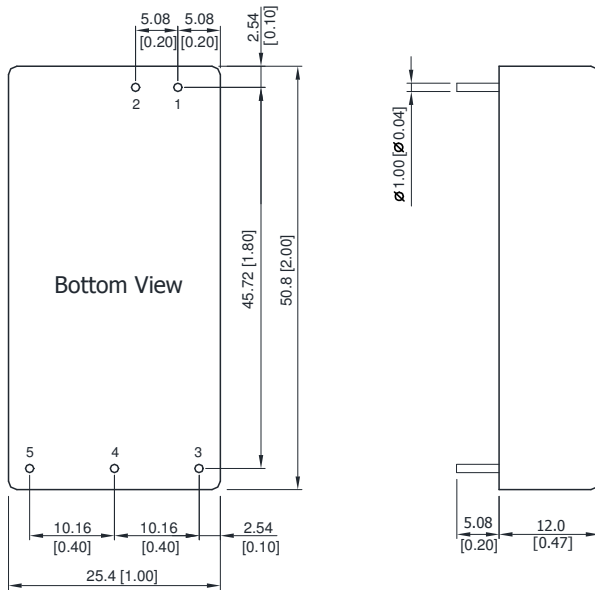

**Note:**

1. All dimensions in mm (inches)
2. Tolerance:  $X.X \pm 0.5$  ( $X.XX \pm 0.02$ )  
 $X.XX \pm 0.25$  ( $X.XXX \pm 0.01$ )
3. Pin diameter:  $1.0 \pm 0.05$  ( $0.04 \pm 0.002$ )

### Pin Connections

#### Single output


- Pin 1 – +Vin
- Pin 2 – -Vin
- Pin 3 – +Vout
- Pin 4 – No Pin
- Pin 5 – -Vout

#### Dual Output

- Pin 1 – +Vin
- Pin 2 – -Vin
- Pin 3 – +Vout
- Pin 4 – Common
- Pin 5 – -Vout

Physical Characteristics	
Case Size	50.8x25.4x12.0mm (2.0x1.0x0.47 inches)
Case Material	Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Pin Material	Tinned Copper
Weight	30g

## Recommended Pad Layout

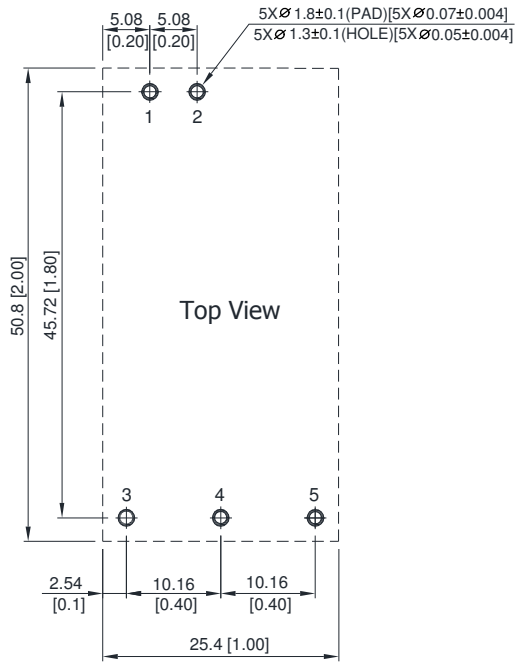

## Environmental Specifications

### EMC Immunity

AEE20W-M series power supply is designed to meet the following EMC immunity specifications.

Table 4. EMC Specifications:

Parameter	Standards & Level		Performance
EMI	Conduction & Radiation	EN55011, FCC part15	Class A
EMS	EN60601-1-2 4 <sup>th</sup>		
	ESD	EN61000-4-2 Air $\pm 15$ kV, Contact $\pm 8$ kV	Perf. Criteria A
	Radiated immunity	EN61000-4-3 10V/m	
	Fast transient <sup>1</sup>	EN61000-4-4 $\pm 2$ KV	Perf. Criteria A
	Surge <sup>1</sup>	EN61000-4-5 $\pm 1$ KV	Perf. Criteria A
	Conducted immunity	EN61000-4-6 10Vrms	Perf. Criteria A
	PfMF	EN61000-4-8 30A/M	Perf. Criteria A

Note 1: To meet EN61000-4-4 & EN61000-4-5, an external capacitor across the input pins is required. Suggested capacitor : 330 $\mu$ F/100V.

## Safety Certifications

The AEE20W-M series power supply is intended for inclusion in other equipment and the installer must ensure that it is in compliance with all the requirements of the end application. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.

Table 5. Safety Certifications for AEE20W-M series power supply system

Document	Description
cUL/UL 60950-1 (CSA certificate)	US and Canada Requirements
IEC/EN 60950-1 (CB-scheme)	European Requirements (All CENELEC Countries)
UL60601-1	US Medical Requirements
IEC/EN 60950-1, IEC/EN 60601-1 3rd Edition, 2 MOPP	International and European Medical Requirements

## Operating Temperature

Table 6. Operating Temperature:

Parameter	Model / Condition	Min	Max	Unit
Operating Temperature Range (Natural Convection <sup>1</sup> , See Derating)	AEE02H24-M AEE02BB24-M AEE02CC24-M AEE02C48-M AEE02CC48-M	-40	66	°C
	AEE02B12-M AEE02H12-M AEE02BB12-M AEE02CC12-M AEE02B24-M AEE02C24-M AEE02B48-M AEE02H48-M AEE02BB48-M		62	
	AEE02C12-M AEE04A24-M AEE04A48-M		58	
	AEE04A12-M		51	
Operating Case Temperature	All	-	+95	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		-	95	%
Altitude		-	4000	m
Cooling	Free-Air convection			
Lead Temperature (1.5mm from case for 10Sec.)		-	260	°C

Note1 - The "natural convection" is about 20LFM but is not equal to still air (0 LFM).

## MTBF and Reliability

The MTBF of AEE20W-M series of DC/DC converters has been calculated using MIL-HDBK 217F NOTICE2, Operating Temperature 25 °C, Ground Benign.


Model	MTBF	Unit
AEE04A12-M	1087344	Hours
AEE02B12-M	1598916	
AEE02C12-M	1655302	
AEE02H12-M	1565185	
AEE02BB12-M	1565185	
AEE02CC12-M	1758649	
AEE04A24-M	1308922	
AEE02B24-M	1639993	
AEE02C24-M	1691078	
AEE02H24-M	1708823	
AEE02BB24-M	1708823	
AEE02CC24-M	1780647	
AEE04A48-M	1419400	
AEE02B48-M	1641012	
AEE02C48-M	1692282	
AEE02H48-M	1474814	
AEE02BB48-M	1474814	
AEE02CC48-M	1793561	



## Application Notes

### Input Reflected-Ripple Current Test Setup


Input reflected-ripple current is measured with an inductor  $L_{in}$  ( $4.7\mu H$ ) and  $C_{in}$  ( $220\mu F$ ,  $ESR < 1.0\Omega$  at  $100\text{ KHz}$ ) to simulate source impedance. Capacitor  $C_{in}$ , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is  $0\text{-}500\text{ KHz}$ .

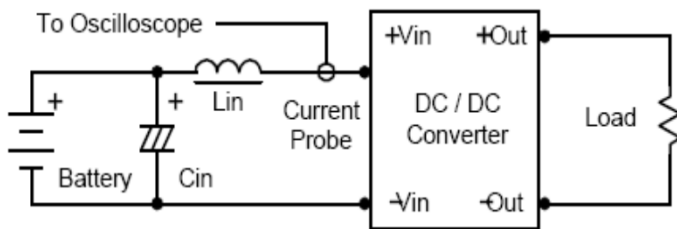

Component	Value	Reference
Lin	$4.7\mu H$	-
Cin	$220\mu F$ ( $ESR < 1.0\Omega$ at $100\text{ KHz}$ )	Aluminum Electrolytic Capacitor


## Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7uF capacitors at the output.

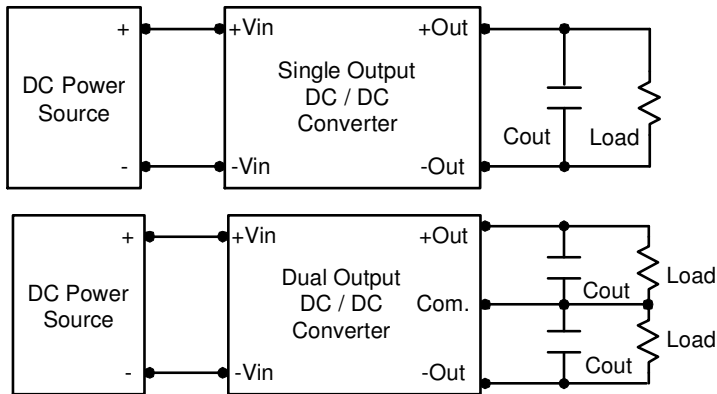


## Peak-to-Peak Output Noise Measurement Test

Use a  $C_{out}$  0.47uF ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter

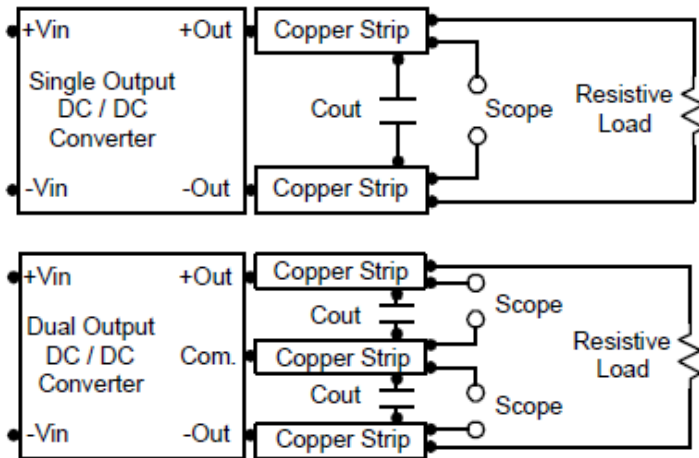

## Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. By using a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 kHz) capacitor of a 10μF for the 12V input devices and a 4.7μF for the 24V input devices and a 2.2μF for the 48V devices, capacitor mounted close to the power module helps ensure stability of the unit.

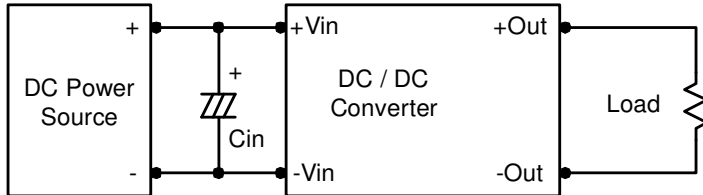

## Output Over Current Protection

To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.


## Output Over Voltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals.

The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.

## Thermal Considerations


Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 95 °C. The derating curves are determined from measurements obtained in a test setup.

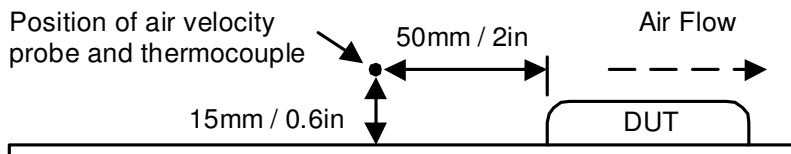

## Maximum Capacitive Load


The AEE20W-M series has limitation of maximum connected capacitance at the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the datasheet.

**Packaging Information**

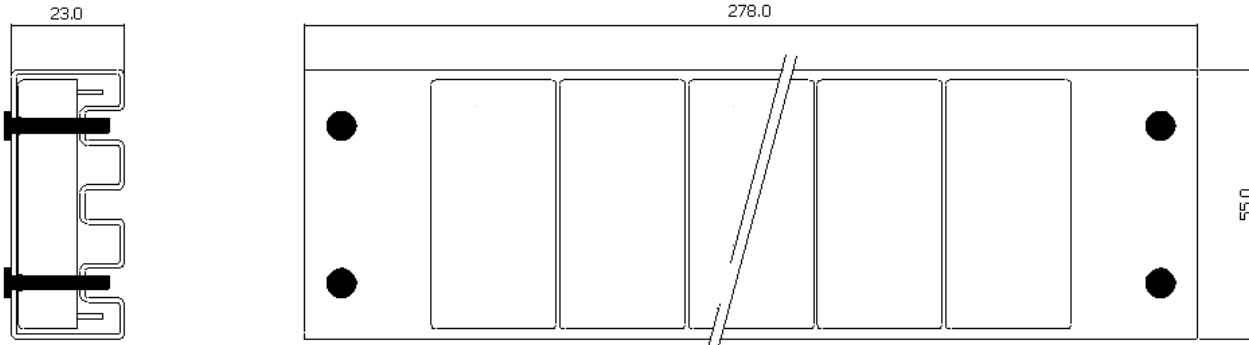

**Wave Soldering Considerations**

Lead free wave solder profile

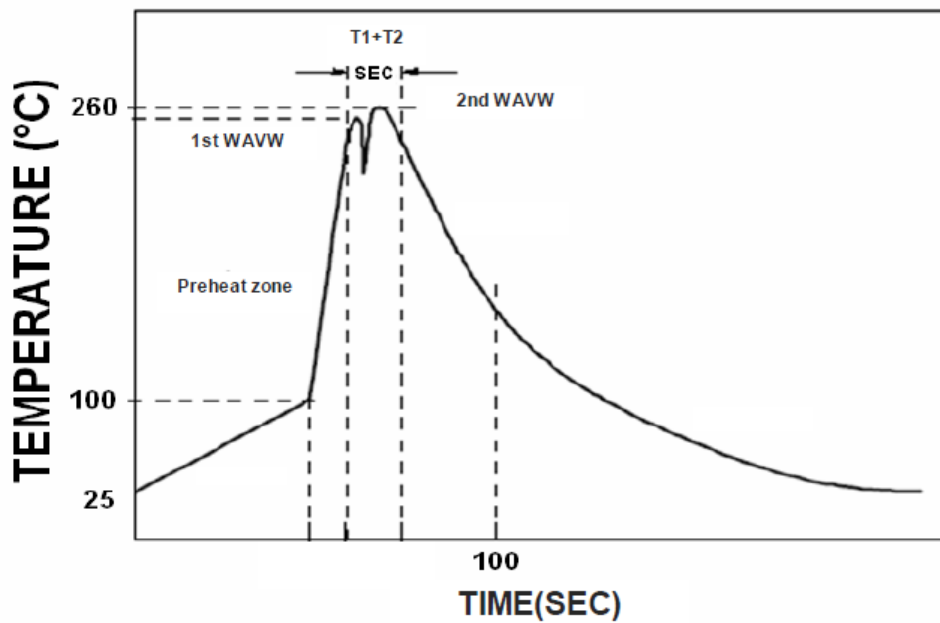

Profile Feature	Reference Parameter
Heating rate during preheat	Rise temp speed: 3°C/sec max.
Final preheat temperature	Preheat temp: 100~130°C
Peak temperature	Peak temp: 250~260°C Peak Time
Time within peak temperature	Peak time(T1+T2): 4~6 sec

Reference Solder: Sn-Ag-Cu; Sn-Cu; Sn-Ag  
 Hand Welding: Soldering iron; Power 60W  
 Welding Time: 2~4 sec  
 Temp.: 380~400 °C

## Record of Revision and Changes

Issue	Date	Description	Originators
1.0	01.11.2017	First Issue	K. Wang
1.1	09.25.2017	Update the ESD voltage rating; Add the 4th edition EMI EN55011 and EMS EN60601-1-2; Update input current, ripple, operating temperature, pin diameter and derating curves	A. Zhang

### WORLDWIDE OFFICES

#### Americas

2900 S.Diablo Way  
 Tempe, AZ 85282  
 USA  
 +1 888 412 7832

#### Europe (UK)

Waterfront Business Park  
 Merry Hill, Dudley  
 West Midlands, DY5 1LX  
 United Kingdom  
 +44 (0) 1384 842 211

#### Asia (HK)

14/F, Lu Plaza  
 2 Wing Yip Street  
 Kwun Tong, Kowloon  
 Hong Kong  
 +852 2176 3333



[www.artesyn.com](http://www.artesyn.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.  
 © 2014 All rights reserved.

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
 For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)