

# SPECIFICATION FOR APPROVAL



TO: \_\_\_\_\_

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER		DELTA MODEL		06A2
ORDER P/N.	06A2		SAMPLE ISSUE DATE		

1. ELECTRICAL CHARACTERISTICS:

1-1. VOLTAGE RATING ..... 250VAC

1-2. CURRENT RATING

- UL : RECOGNIZED AT 6A,115VAC/250VAC
- CSA : CERTIFIED AT 6A,115VAC/250VAC
- SEMKO : 6A/250VAC

1-3. OPERATING FREQUENCY .....48-440Hz

1-4. HIPOT RATING (FOR ONE MINUTE)

- A. LINE TO GROUND ..... 2000VAC
- B. LINE TO LINE ..... 2000VAC

1-5. MINIMUM INSERTION RESISTANCE (FOR ONE NINUTE AT 500VDC)

- A. LINE & NEUTRAL TO GROUND ..... 10M OHM
- B. LINE TO NEUTRAL ..... 10M OHM

1-6. SAFETY

REPORT BY	CHECKED BY	APPROVED BY		
			REV.	

**DELTA ELECTRONICS, INC.**

186 RUEY KUANG ROAD, NEIHU. TAIPEI 114,  
TAIWAN, R.O.C.  
TEL:886-2-87972088 FAX:886-2-87972120

# SPECIFICATION FOR APPROVAL




TO: \_\_\_\_\_

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER		DELTA MODEL		06A2
ORDER P/N.	06A2		SAMPLE ISSUE DATE		


## 2. PHYSICAL DIMENSIONS:

\* SUGGESTED THICKNESS OF MOUNTING PANEL IS FROM 1.0 TO 1.6 mm

\* SUGGEST MOUNTING CUTOUT

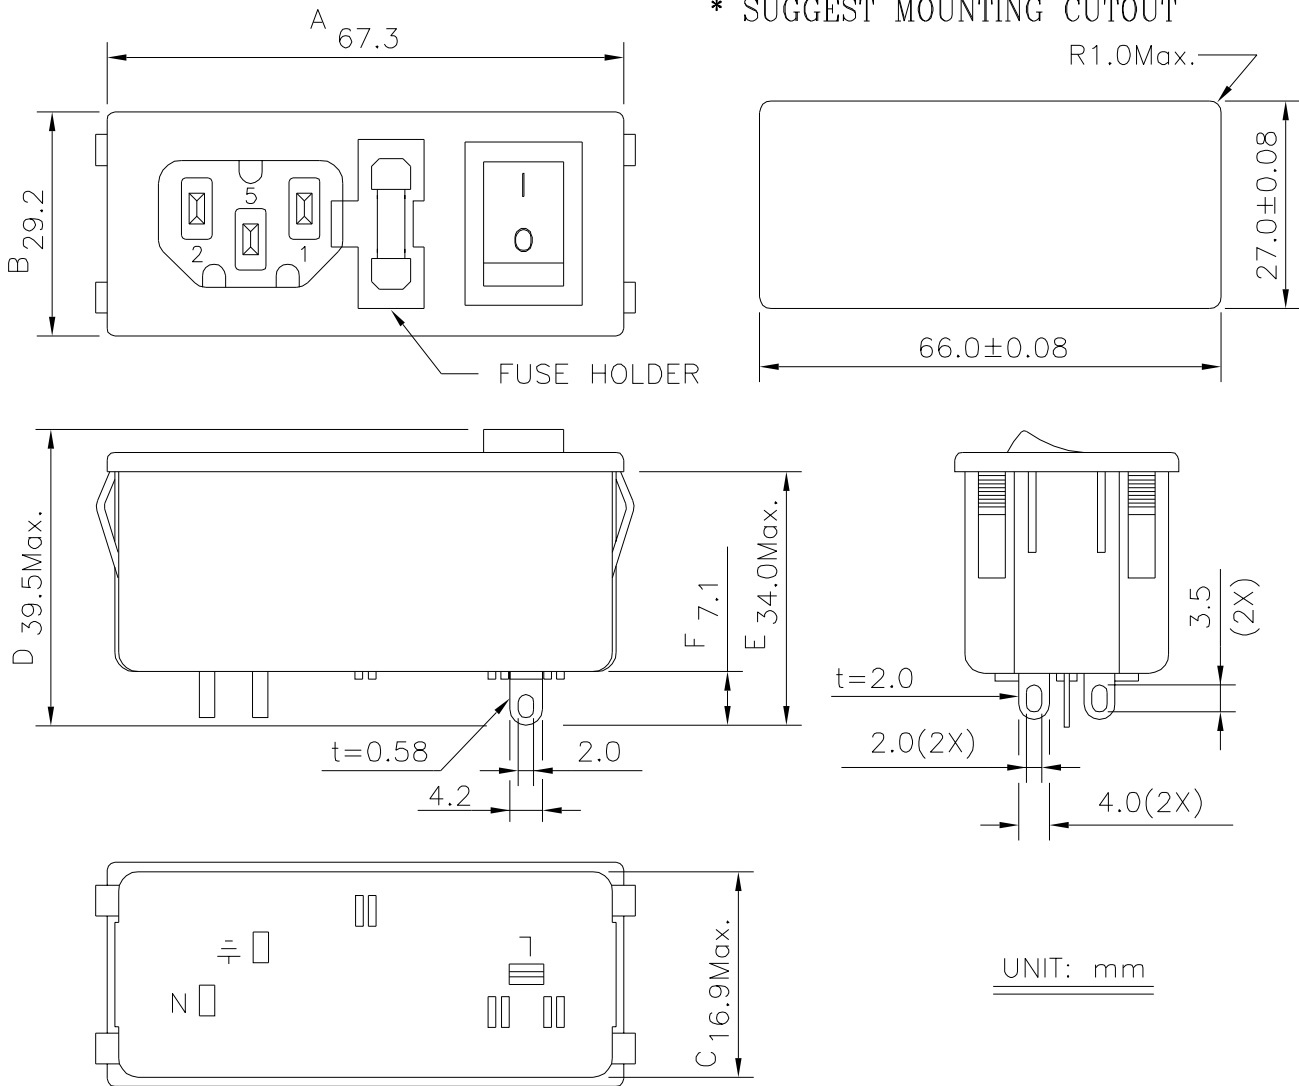

## 3. SCHEMATIC:

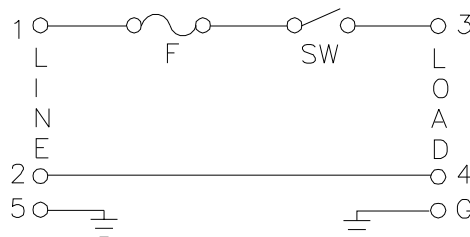

REPORT BY	CHECKED BY	APPROVED BY	UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCE DCEIMALS .X±      .XX±      ANGLES±		
			REV.		