


- NOTES:
- 1.0 ELECTRICAL SPECIFICATIONS
 - 1.1 FREQUENCY RANGE: DC to 12.4 GHz
 - 1.2 MAXIMUM INPUT POWER:
 - AT +25°C: 2 WATTS
 - AT +125°C: 0.5 WATTS
 - 1.3 OPERATING TEMPERATURE RANGE:
 - 55°C to +125°C
 - 1.4 IMPEDANCE: 50 OHMS
 - 1.5 MAXIMUM VSWR:
 - DC to 4.0 GHz: 1.07:1
 - 4.0 to 12.4 GHz: 1.12:1
 - 2.0 MARK UNIT AS SHOWN.
(REF.: INK-02611-27-12)
 - 3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

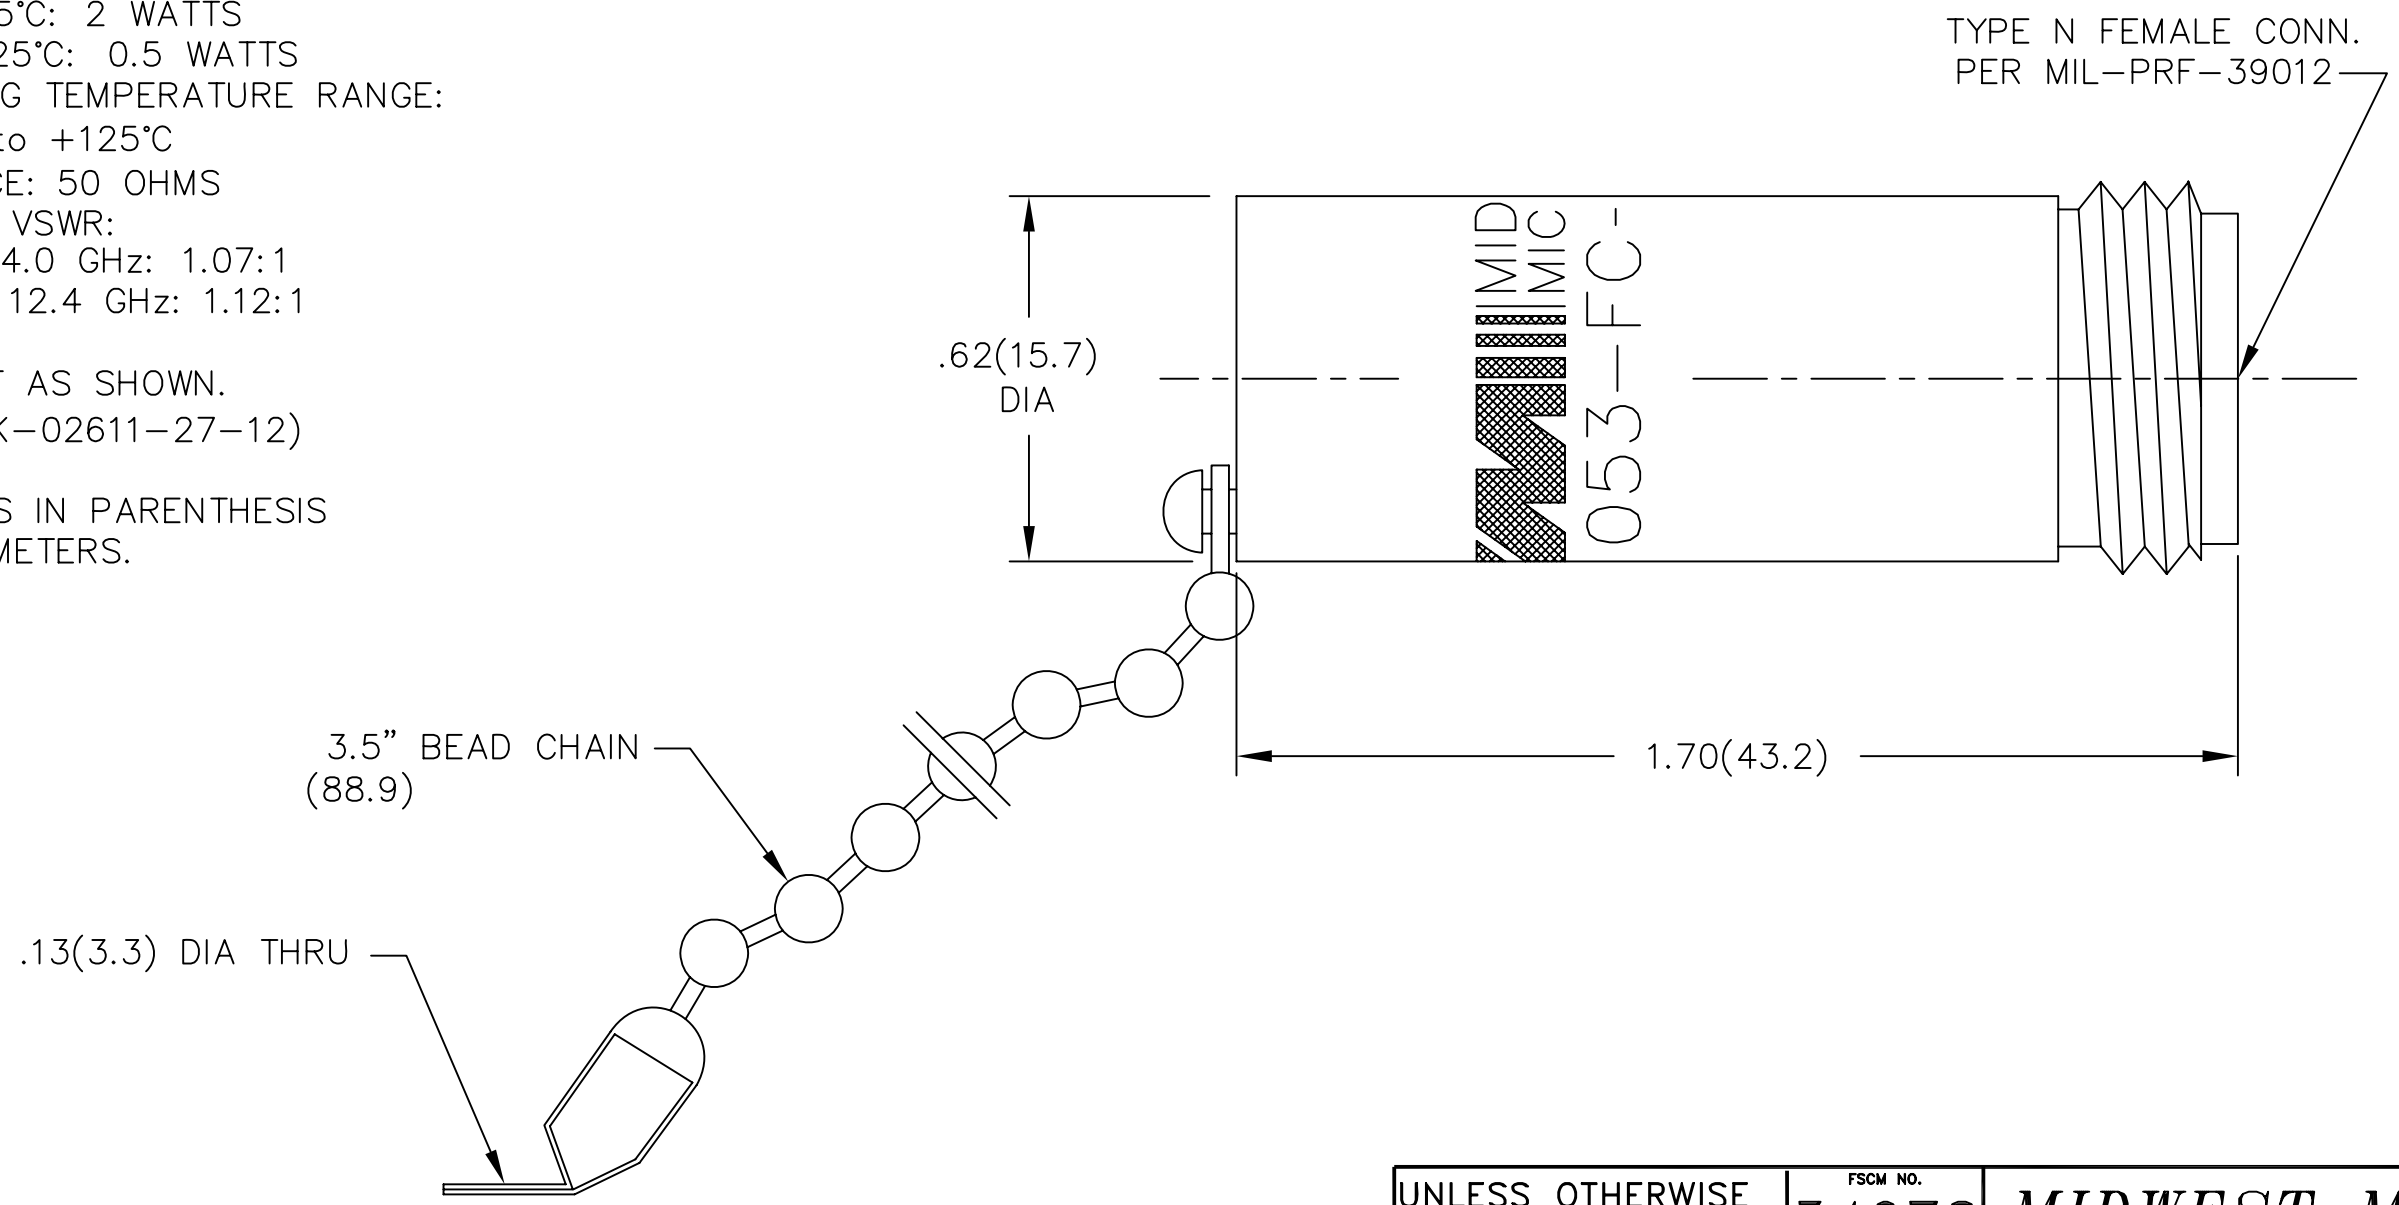

DATE	5/20/94	10/26/05
DESCRIPTION	RELEASED	ADDED TITLEBLOCK
REV.	-	-1

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:	FSCM NO. 34078		MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION	
3 PLACE DECIMALS ±.005	DRAWN/DATE M.HOLLMAN 5/16/94	ENG./DATE G.KOZAK 5/19/94	DRAWING NUMBER TRM-2053-FC-NNN-02	
2 PLACE DECIMALS ±.02	CHECKED/DATE A.BEATTY 5/18/94		APPROVED/DATE	
FRACTIONS ±1/64	PARALLELITY: T.I.R. _____		SCALE: 3=1	
FLATNESS: T.I.R. _____	CONCENTRICITY: T.I.R. _____		SHEET 1 of 1	
ANGLES AND PERPENDICULARITY: ±1'				