
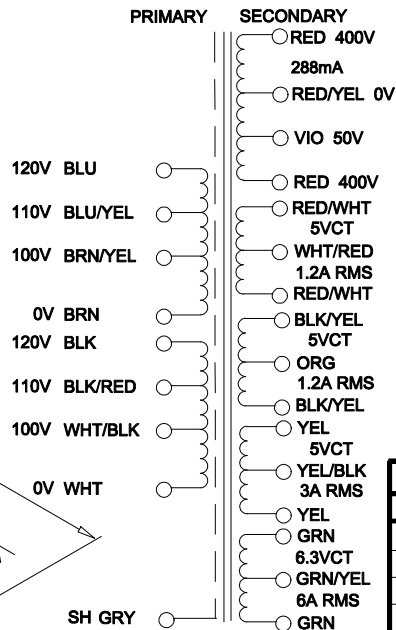


DIMENSIONS:	
A	3.750" ±0.063
B	4.935" ±0.125
C	4.560" ±0.063
D	3.000" ±0.063
E	3.813" ±0.063
G	0.203" x 0.375" ±0.015

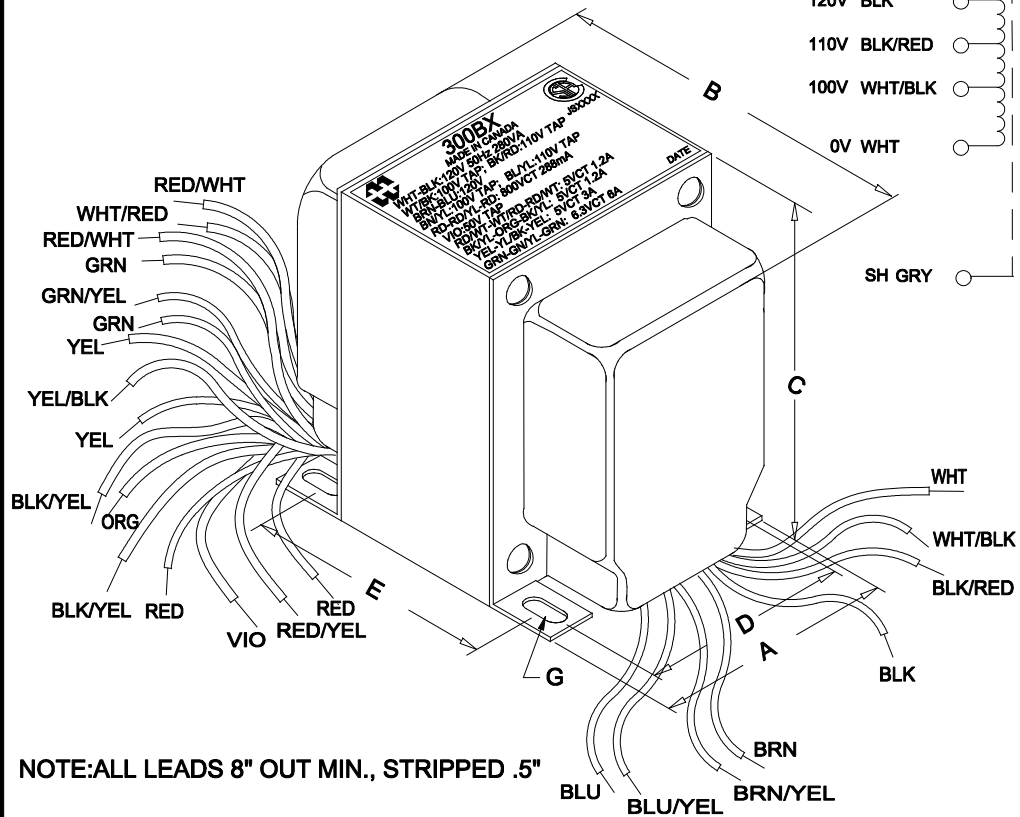

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I <sub>ex</sub>	@ 120V, 60Hz, WHT - BLK	50mA	Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK		
	RED - RED =	865.7V	±2%
	RED - RED/YEL = RED/YEL - RED =	432.9V	±2%
	RED/YEL - VIO =	51.96V	±2%
	RD/WT - WT/RD = WT/RD - RD/WT =	2.679V	±2%
	RED/WHT - RED/WHT =	5.357V	±2%
	BLK/YEL - ORG = ORG - BLK/YEL =	2.679V	±2%
	BLK/YEL - BLK/YEL =	5.357V	±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.679V	±2%
	YEL - YEL =	5.357V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.482V	±2%
	GRN - GRN =	6.964V	±2%
DCR	@ 20°C, WHT - BLK =	2.145 Ω	±20%
	@ 20°C, BRN - BLU =	2.324 Ω	±20%
	@ 20°C, RED - RED =	93.41 Ω	±20%
	@ 20°C, RED/WHT - RED/WHT =	0.120 Ω	±20%
	@ 20°C, BLK/YEL - BLK/YEL =	0.123 Ω	±20%
	@ 20°C, YEL - YEL =	0.050 Ω	±20%
	@ 20°C, GRN - GRN =	0.053 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

NOTE: ALL LEADS 8" OUT MIN., STRIPPED .5"

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		PH # (519) 886-6181 FAX # (519) 886-9540
0	RELEASED.	03/09/12	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: 300BX
			DATE: 03/09/12	APP'D. BY:	TRANSFORMER
				DIMENSIONS: IN(X) MM( )	DWG. NO. 300BX