

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XELCOLOR
HOUSING & PLUNGER & SLIDE: MOLDED NYLON 6,6.
AVAILABLE IN TEN COLORS.


CONTACT NEEDLE: STAINLESS STEEL.
BANANA SOCKER: 360 1/2 HD. BRASS.
COMPRESSION SPRING: STAINLESS STEEL.

2. P/N: 9274COLOR
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.
ALLIGATOR: STEEL. NICKEL PLATED.

3. P/N: W-600/COLOR
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

4. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS		DATE	APPROVED
LTR			

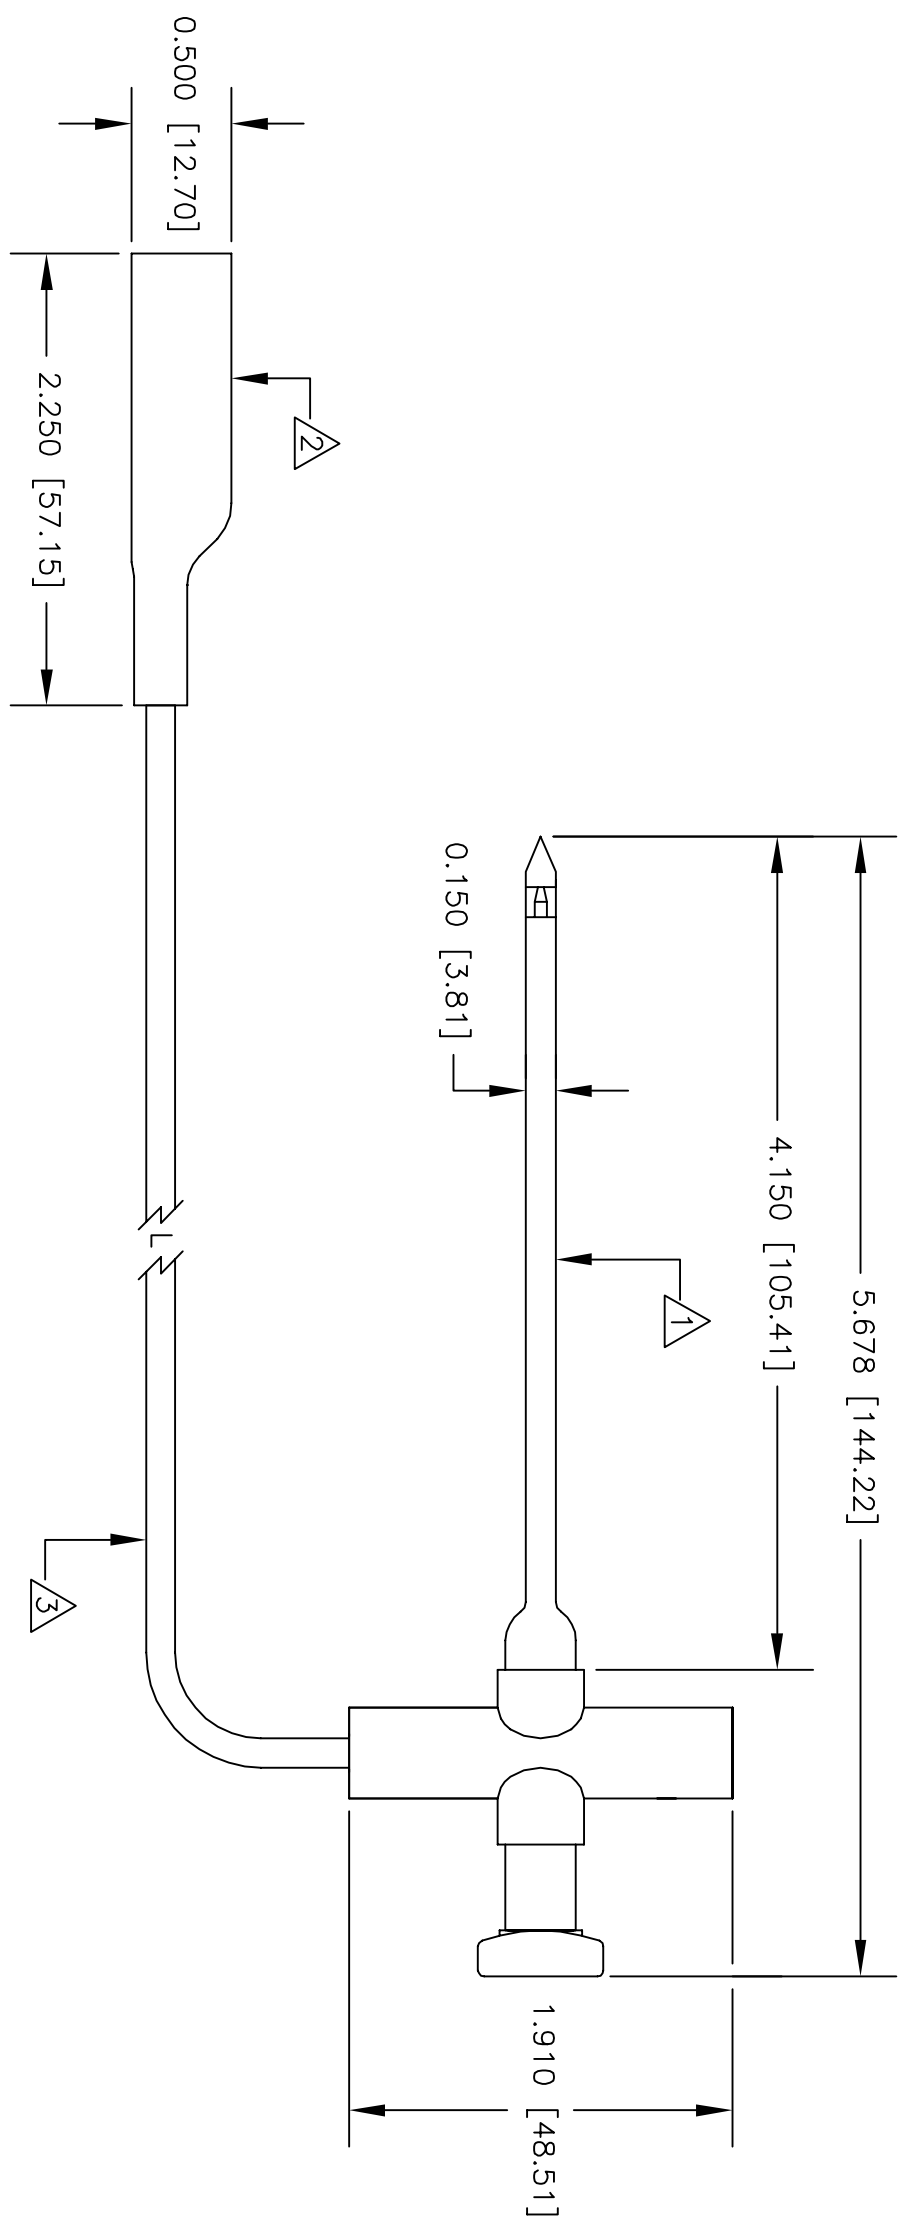

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± .XXX ± ±		CONTRACT NO.	
MATERIAL SEE NOTE.		APPROVALS	DATE
FINISH SEE NOTE.		R.L.	10/10
APPLICATION		APPROVED BY	
DO NOT SCALE DRAWING			
DESCRIPTION MACRO-HOOK (XEL) TO STD ALLIGATOR (9274)		SIZE	REV.
CODE IDENT NO. DRAWING NO.		B 08505	619XEL
SCALE		1:1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.