

NOTES: 040^{±.001}

- ① MAT'L: COPPER (STOCK TKN. $\frac{1.02}{1}$)
- ② TIN-PLATED ELECTRO TIN (.0003 MIN)
- ③ TIN-PLATED BRASS FUNNEL FERRULE
- ④ NYLON INSULATION (COLOR CODED YELLOW)

STUD SIZES: ($\pm .005$)


- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

"UL" LISTING #E32244
 "CSA" LISTING #18689

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$

(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

WIRE SIZE: 12 - 10 AWG²
 4.0 - 6.0 MM

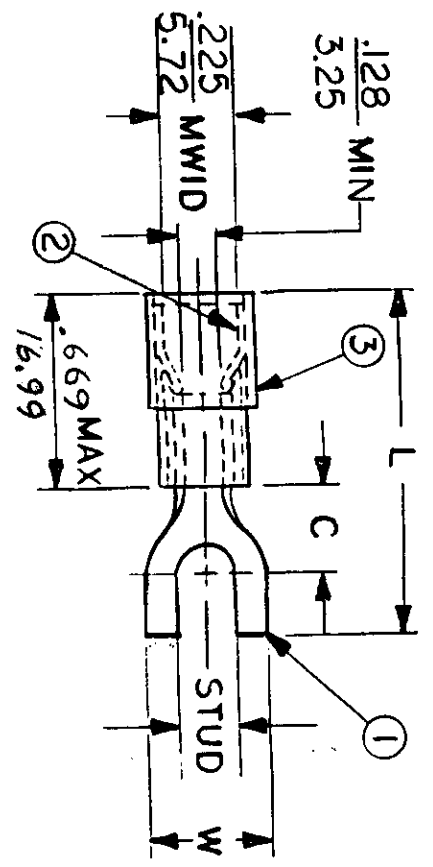

FILE NO. C-CD-503-02

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	AVAILABLE STUD SIZES
C-541-	$\frac{.375}{9.53}$	$\frac{.301}{7.65}$	$\frac{1.232}{31.29}$	06, 08, 10
C-568-	$\frac{.533}{13.54}$	$\frac{.393}{9.98}$	$\frac{1.385}{35.18}$	10, 14, 56
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED REF A DCA/1030 REV 11/6/94 SCALE: NTS DATE: 11-15-84 TITLE: SPADE TONGUE TERMINAL AVIKRIMP 500-SERIES DRAWN BY: JJ CHKD BY: GZ 11-26-84 APPRD. BY:				
FRAC.	DEC.	ANG.	DWG. NO. A CUSTOMER DWG	

