


MODEL:

PDU3V602D354A

3-Phase Power Strip for PDU360AT6G60 ATS Installations



208V
3-Phase Input



8-Position
Connector



208V
Single-Phase
Output



17.3kW
Load Capacity



54 Outlets





0U
Rack-Mount



Toolless
Mounting Buttons

- A** Interlaced C13 and C19 Outlets
- B** 20A Double-Pole Magnetic Circuit Breakers (x6)
- C** 2.5 ft. Input Power Cord (x2)
- D** Input Plugs with Proprietary 8-Position Connector (x2)
(Plugs into PDU360AT6G60 ATS PDU.)
- E** 3 ft. Circuit Detection Cable
(Plugs into PDU360AT6G60 ATS PDU.)
- F** Toolless Mounting Buttons
- G** Grounding Screw

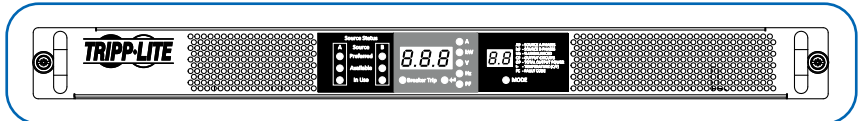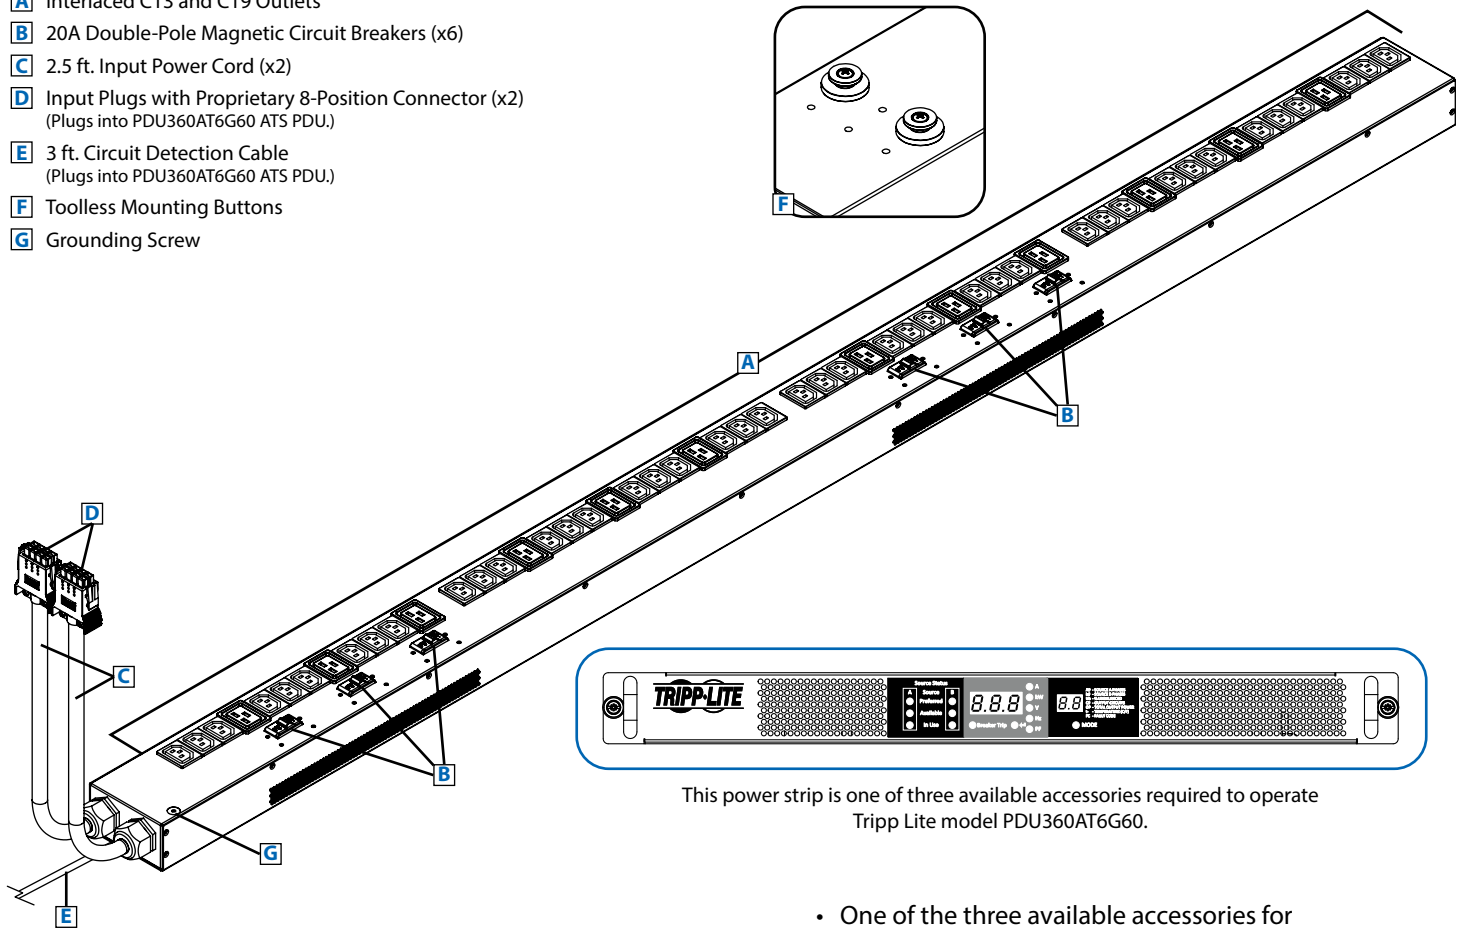

This power strip is one of three available accessories required to operate Tripp Lite model PDU360AT6G60.

- One of the three available accessories for PDU360AT6G60 and other select Tripp Lite 3-phase ATS PDUs
- Saves rack space, improves airflow and reduces cord clutter by locating outlets closer to connected devices
- Ideal for high-density equipment racks in data centers and server rooms

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS









1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

Specifications

Model	PDU3V602D354A
Voltage	208V
Frequency	60 Hz
Load Capacity	17.3kW
Input Plug	Proprietary 8-Position Connector (x2)
Input Cord Lengths	2.5 ft. (0.8 m)
Outlets	54 (42 C13, 12 C19)
Primary Mounting Options	0U (Vertical)
Unit Weight & Dimensions	19 lb. / 70 x 4 x 2.17 (HxWxD in inches) 8.62 kg / 1778 x 101.6 x 55.1 (HxWxD in mm)
Standards	Tested to UL/CSA 60950-1 (USA, Canada), FCC Class A (Emissions), NOM (Mexico), RoHS



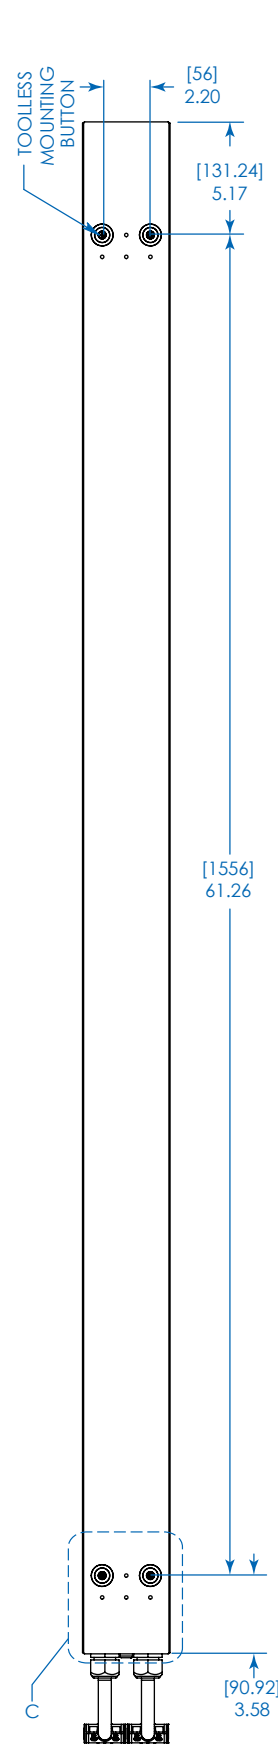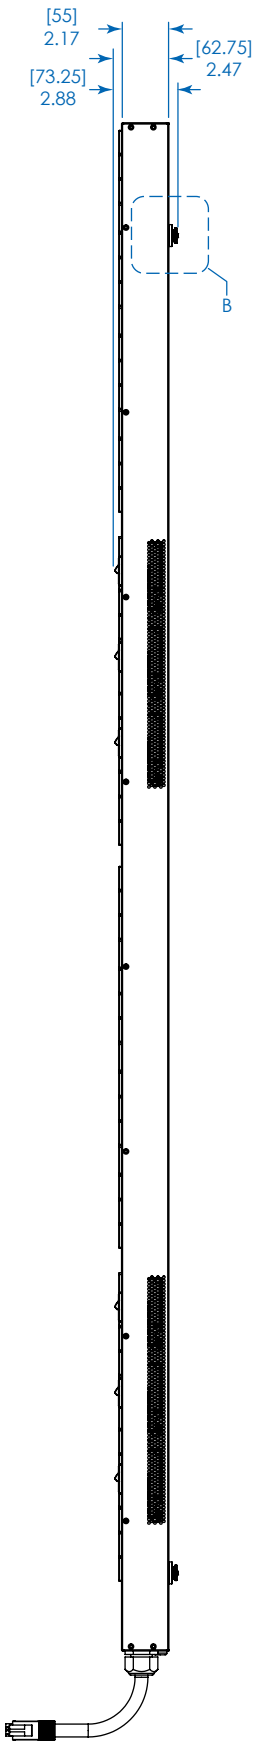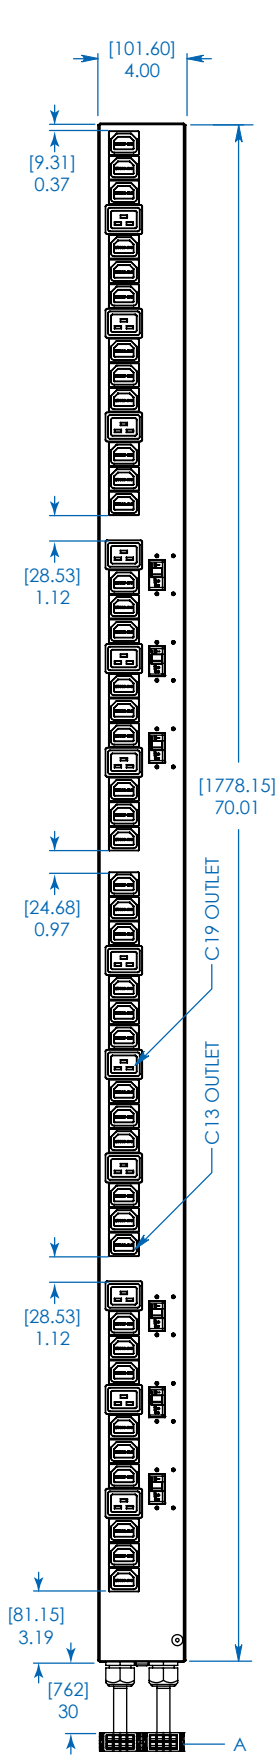

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:
PDU3V602D354A



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com