

PRODUCT NUMBER

95253-YXXXLF

WHEN REQUIRED, ADD SUFFIX LETTER "LF" INDICATES THE PRODUCT IS RoHS COMPATIBLE, NOTE 6.  
PACKAGING OPTIONS, NOTE 3.

PLATING

- 1 = 0.76µm GOLD/GXT (FULL PLATED) ON 1.27µm NICKEL MIN
- 3 = 2µm MIN MATTE TIN (FULL PLATED) ON 1.27µm NICKEL MIN
- 8 = 0.38µm GOLD/GXT (FULL PLATED) ON 1.27µm NICKEL MIN

STYLE	SIZE	DIM"A"	OMIT PIN
01	2x07	5.9	A3
02	2x07	8.0	A3
03	2x04	5.9	B4
04	2x07	5.9	B4
05	2x08	5.9	B7

NOTES:

- 1. HOUSING MAT'L : HIGH TEMPERATURE THERMOPLASTIC. UL94V-0 COLOR: BLACK
- 2. PIN MATERIAL : PHOSPHOR BRONZE

3 - PACKAGING OPTIONS:

- = POLY BAGS
- B = TUBE + CAP
- A = TAPE & REEL WITH CAP, AS AVAILABLE

- 4. 9N MIN RETENTION IN EITHER DIRECTION
- 5. TO DETERMINE DIMENSIONS :  
N = NUMBER OF POSITIONS PER ROW  
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- 6. RoHS COMPATIBLE PRODUCT SPECIFICATIONS

a - PLATING:

- "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.




b - MANUFACTURING PROCESS COMPATIBILITY

- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 30 SECONDES IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

c - LABELING:

- MEETS PACKAGING SPECS AS PER GS-14-920

d - LEGAL STATEMENT: SEE GS-47-0004

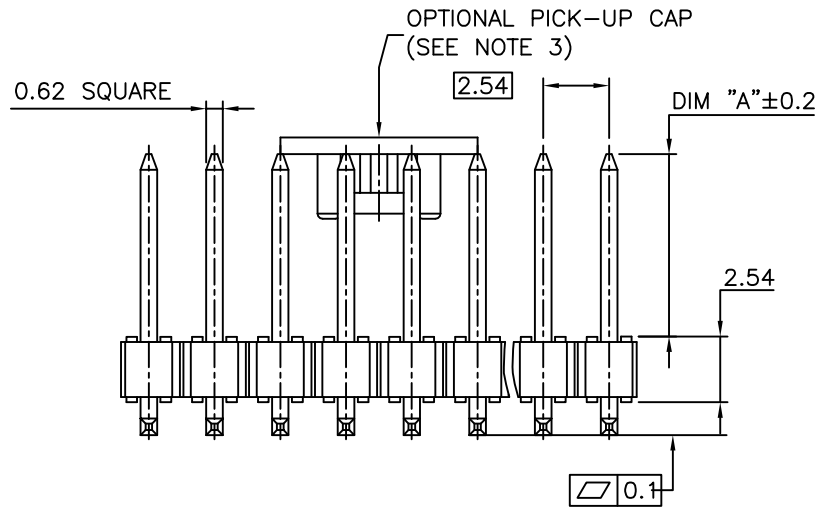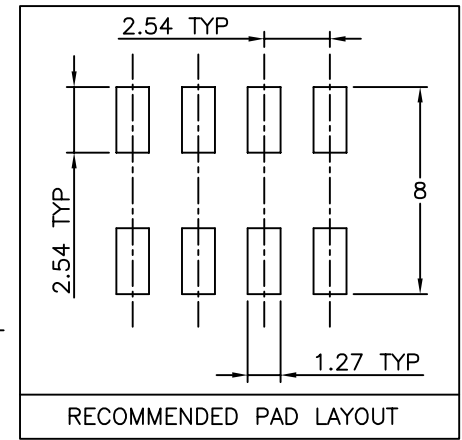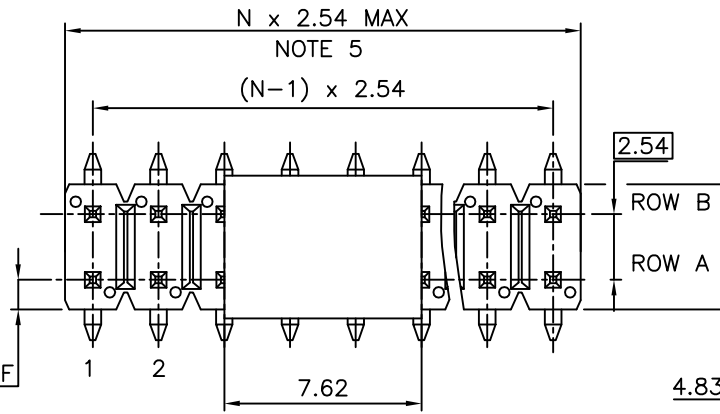

mat'l. code		surface	tolerance	projection	product family
		ISO 1302	ISO 406 ISO 1101		HEADER
ltr		tolerances unless otherwise specified			title
ecn no	dr	angles	linear		
H F90366	LMU 99.06.08		x.x ±0.3		HEADER DR, SMT,POLARIZED
J F03-020	LMU 03.04.23		x.xx ±0.13		
K F04-0362	LMU 04.11.30		x.xxx ±0.05		
L F06-0168	LMU 06.04.21	dr	P.NIZZI 96.04.15		
M F06-0208	JCO 06.06.22	engr	J. COMPAGNON 96.04.15		
N F08-0148	JCO 08.05.27	chr		scale 5:1	dwg no
P F-23191	AMA 16.02.01	appd	JMC 96.04.15		sheet 1 of 1
sheet	revision				size
index	sheet				A3
					type
					CUSTOMER Drawing