
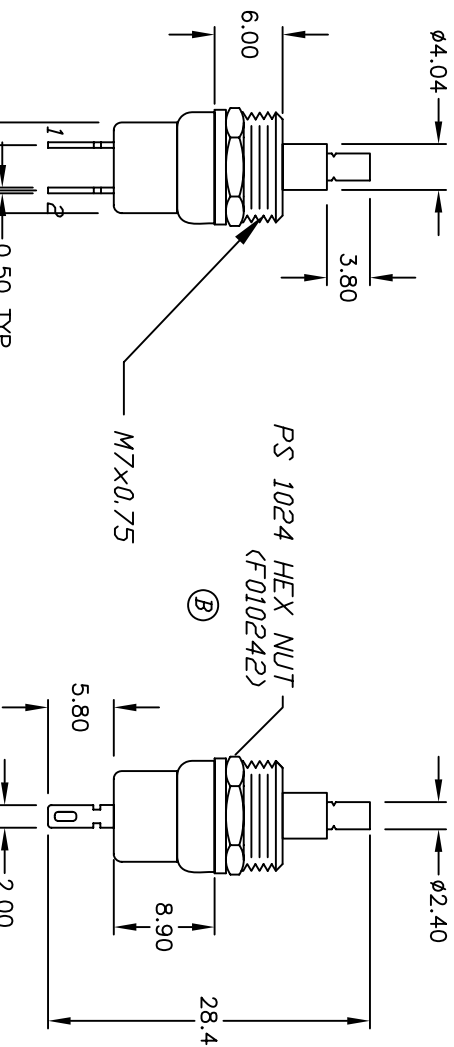



RECOMMENDED PANEL LAYOUT



- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERMINAL NO'S FOR REFERENCE ONLY
 4. RATING: 3A @ 125VAC; 1.5A @ 250VAC
 5. CONTACT RESISTANCE:
50mILLI-OHMS max.
 6. INSULATION RESISTANCE:
500V 100Mega-OHMS min.
 7. DIELECTRIC STENGTH:
1000V 1minute

C	14259	CORRECT CIRCUIT DIAGRAM	8/24/04	AR
B	12574	ADD COMPONENT	11/18/02	CJB
A	12105	RELEASED FOR PRODUCTION	5/1/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE		SCALE		DATE	DR	DWG	REV
PS 1024A (w/no cap)		1.5:1		5/1/02	CJB	F010244	C
E-SWITCH®							
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMERED							