


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

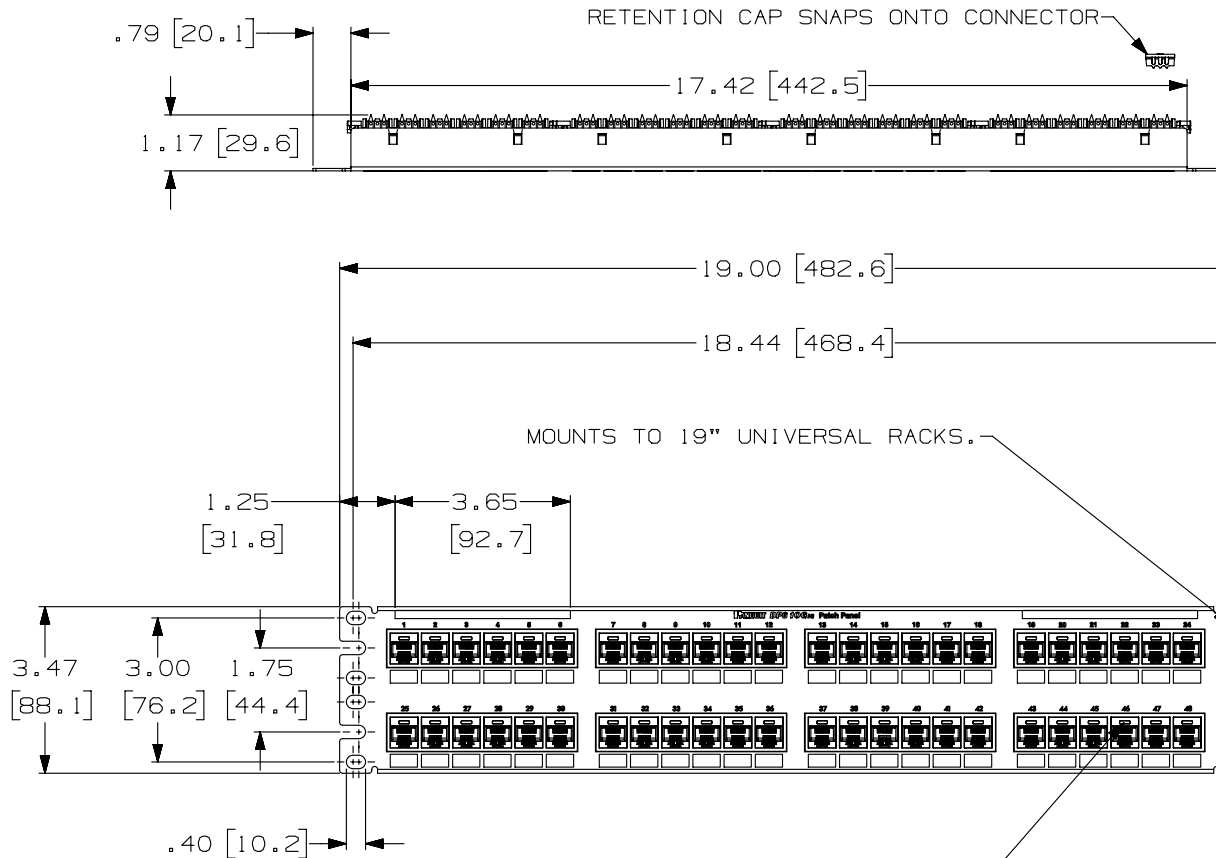

CID**-C, PHONE OR DATA ICON LOCATED HERE, IDENTIFIES INDIVIDUAL PORT. OPTIONAL, NOT SUPPLIED.

PANDUIT PART NO.	WEIGHT (APPOX.)
DP485E88TGY	2.2 lb (997.9 g)

NOTES:

- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
- MATERIAL:
 PANEL HOUSING: STEEL
 RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
 RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 48 PORT PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) M6x1x15MM METRIC SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN BRACKETS ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

PART NUMBER		DP485E88TGY	
TITLE		DP5E CATEGORY 5E 48 PORT PATCH PANEL	
		CUSTOMER DRAWING	
ITEM REVISION NAME		M02479JI/00	
DATASET FILE NAME		M02479JI_DC245/00A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.x ± .xxx ± .010 [.3]		SEE NOTES	
.xx ± .03 [.8]		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		02479-245	
DRAWN BY	DATE	CHK	SCALE
LZ	3-3-06	CEF	NONE
SHT 1 OF 1		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
1	5/20/14	JSP	REFR	MMR	A. REVISED DRAWING TITLE BLOCK.	02479-245
R	3-4-06	LZ	CEF	CEF	RELEASED TO PRODUCTION	02479-245

D101000DA/14