

2N2484

NPN SILICON TRANSISTOR



TO-18 CASE



www.centrasemi.com

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR 2N2484 type is an NPN silicon transistor designed for low noise amplifier applications.

**MARKING: FULL PART NUMBER**

**MAXIMUM RATINGS:** (T<sub>A</sub>=25°C)

Collector-Base Voltage  
 Collector-Emitter Voltage  
 Emitter-Base Voltage  
 Continuous Collector Current  
 Power Dissipation  
 Operating and Storage Junction Temperature  
 Thermal Resistance

**SYMBOL**

V<sub>CB0</sub> 60  
 V<sub>CEO</sub> 60  
 V<sub>EBO</sub> 6.0  
 I<sub>C</sub> 50  
 P<sub>D</sub> 360  
 T<sub>J</sub>, T<sub>stg</sub> -65 to +200  
 θ<sub>JA</sub> 486

**UNITS**

V  
 V  
 V  
 mA  
 mW  
 °C  
 °C/W

**ELECTRICAL CHARACTERISTICS:** (T<sub>A</sub>=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I <sub>CBO</sub>	V <sub>CB</sub> =45V		10	nA
I <sub>CBO</sub>	V <sub>CB</sub> =45V, T <sub>A</sub> =150°C		10	μA
I <sub>CEO</sub>	V <sub>CE</sub> =5.0V		2.0	nA
I <sub>EBO</sub>	V <sub>EB</sub> =5.0V		10	nA
BV <sub>CB0</sub>	I <sub>C</sub> =10μA	60		V
BV <sub>CEO</sub>	I <sub>C</sub> =10mA	60		V
BV <sub>EBO</sub>	I <sub>E</sub> =10μA	6.0		V
V <sub>CE(SAT)</sub>	I <sub>C</sub> =1.0mA, I <sub>B</sub> =100μA		0.35	V
V <sub>BE(ON)</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =100μA	0.5	0.7	V
h <sub>FE</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =1.0μA	30		
h <sub>FE</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =10μA	100	500	
h <sub>FE</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =10μA, T <sub>A</sub> =-55°C	20		
h <sub>FE</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =100μA	175		
h <sub>FE</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =500μA	200		
h <sub>FE</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =1.0mA	250		
h <sub>FE</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =10mA		800	
h <sub>fe</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =1.0mA, f=1.0kHz	150	900	
f <sub>T</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =50μA, f=5.0MHz	15		MHz
f <sub>T</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =0.5mA, f=30MHz	60		MHz
h <sub>ie</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =1.0mA, f=1.0kHz	3.5	24	kΩ
h <sub>oe</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =1.0mA, f=1.0kHz		40	μS
h <sub>re</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =1.0mA, f=1.0kHz		800	x10 <sup>-6</sup>
C <sub>ob</sub>	V <sub>CB</sub> =5.0V, I <sub>E</sub> =0, f=140kHz		6.0	pF
C <sub>ib</sub>	V <sub>EB</sub> =0.5V, I <sub>C</sub> =0, f=140kHz		6.0	pF

R1 (30-May 2012)


**2N2484**  
**NPN SILICON TRANSISTOR**



**ELECTRICAL CHARACTERISTICS - Continued:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

SYMBOL	TEST CONDITIONS	MAX	UNITS
NF	$V_{CE}=5.0\text{V}$ , $I_C=10\mu\text{A}$ , $R_S=10\text{k}\Omega$ $BW=15.7\text{kHz}$ , 3.0dB PTS @ 10Hz, 10kHz	3.0	dB
NF	$V_{CE}=5.0\text{V}$ , $I_C=10\mu\text{A}$ , $R_S=10\text{k}\Omega$ , $f=100\text{Hz}$ , $BW=20\text{Hz}$	10	dB
NF	$V_{CE}=5.0\text{V}$ , $I_C=10\mu\text{A}$ , $R_S=10\text{k}\Omega$ , $f=1.0\text{kHz}$ , $BW=200\text{Hz}$	3.0	dB
NF	$V_{CE}=5.0\text{V}$ , $I_C=10\mu\text{A}$ , $R_S=10\text{k}\Omega$ , $f=10\text{kHz}$ , $BW=2.0\text{kHz}$	2.0	dB

**TO-18 CASE - MECHANICAL OUTLINE**

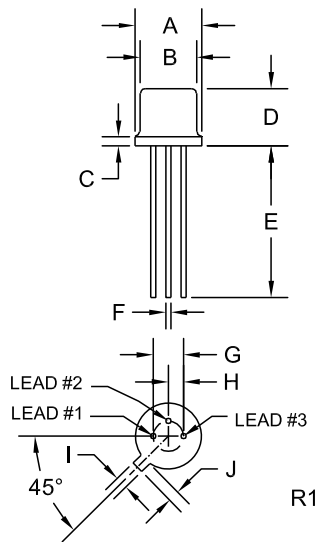

SYMBOL	DIMENSIONS		MILLIMETERS	
	INCHES		MIN	MAX
A (DIA)	0.209	0.230	5.31	5.84
B (DIA)	0.178	0.195	4.52	4.95
C	-	0.030	-	0.76
D	0.170	0.210	4.32	5.33
E	0.500	-	12.70	-
F (DIA)	0.016	0.019	0.41	0.48
G (DIA)	0.100		2.54	
H	0.050		1.27	
I	0.036	0.046	0.91	1.17
J	0.028	0.048	0.71	1.22

TO-18 (REV: R1)

**LEAD CODE:**

- 1) Emitter
- 2) Base
- 3) Collector

**MARKING:**  
**FULL PART NUMBER**

R1 (30-May 2012)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)