


1. Wiring Diagram.

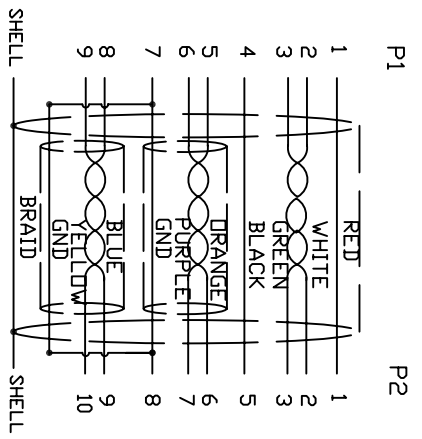

2. Cable test condition :

- Open / Short : 100%
- Insulation resistance : 5M ohms
- Contact resistance : 2 ohm
- Hipot : DC 300V / 1 sec

3. Each pcs with PE polybag

6	CORE	RH14.2*28.5*6.35mm	2
5	CONN	USB3.0 MICRO B MAILE G/F BLACK	P2
4	PVC	45P PVC BLACK OVERMOLD	25g
3	PE	LLDPE 500026 6201	16g
2	CONN	USB3.0 A/M G/F BLUE	P1
1	CABLE	《28AWG (7/0.127T) *1P+D(7/0.127T)+AL+M》*2+28AWG (7/0.127T) *1P+24AWG(7/0.2T)*2C+A+D+B (1//6/0.12AM) ODS.5 BLACK	1
NO.	PART NO.	DESCRIPTION	QTY
		BILL OF MATERIAL	UNIT/REF

A	2015/11/24	INITIAL RELEASE	2015/11/24
REV	ECN#	DESCRIPTION	DATE
Cnc Tech, LLC			
DRAWN	EDWIN LAI	DATE	11/24/15
CHECKED	WENC	DATE	11/24/15
APPROVAL			
DWG NO.	103-1092-BL-F0100	TITLE	USB3.0 A/M-MICRO B W/PERPINS LM
CUSTOMER P/N:		CUSTOMER:	
SHEET	1 OF 1	REV	A