

# NEMA 4X/IP66 Rated Wireless Access Point Enclosures

## specifications

The Wireless Access Point (WAP) enclosure shall have both a NEMA 4X and an IP66 rating to provide protection in outdoor and industrial environments. The WAP enclosure shall provide protection against corrosion, windblown dust and rain, splashing water, and hose-directed water. The WAP enclosure shall be constructed of fiberglass and be capable of enclosing wireless access points from a variety of manufacturers. The WAP enclosure shall include an aluminum mounting plate and an outdoor/industrial connectivity accessory kit. The aluminum mounting plate shall allow installer to perform field modifications (i.e., drilling) on the enclosure. Optional NEMA 4X rated fittings in various sizes shall allow an installer to ingress/egress the enclosure while maintaining NEMA 4X rating. Enclosure shall include a pre-configured mounting template to allow a method of quickly positioning the mounting locations for wireless components. The WAP enclosure shall have provisions for padlocks to protect against tampering and theft.



### NEMA 4X/IP66 Rated Wireless Access Point Enclosures

12" x 12" x 6":	PZNWE12
14" x 12" x 6":	PZNWE14
12" x 12" x 6" (Shielded):	PZNWE12S
14" x 12" x 6" (Shielded):	PZNWE14S

### NEMA 4X Rated Fittings

.115" – .250":	PZNF1
.230" – .395":	PZNF2
.170" – .450":	PZNF3

### NEMA 4X Rated Accessories

Drain and vent kit: PZNDVK

## technical information

<b>Standards:</b>	Complies with NEMA 4X Complies with IP66 UL508A Listed as an Industrial Control Panel
<b>Dimensions:</b>	PZNWE12 and PZNWE12S: 12.0"H x 12.0"W x 6.0"D (304.8mm x 304.8mm x 152.4mm) PZNWE14 and PZNWE14S: 14.0"H x 12.0"W x 6.0"D (355.6mm x 304.8mm x 152.4mm)

## key features and benefits

<b>NEMA 4X and IP66 rating</b>	Provides protection against corrosion, windblown dust and rain, splashing water, and hose-directed water
<b>Fiberglass construction with aluminum mounting plate</b>	Allows installer to perform field modifications (i.e. drilling) on the enclosure
<b>Optional NEMA 4X rated fittings in various sizes</b>	Allows installer to ingress/egress the enclosure while maintaining NEMA 4X rating
<b>Pre-configured mounting template</b>	Quickly and confidently identifies mounting hole locations
<b>UL508A Listed as an Industrial Control Panel enclosure</b>	Capable of mounting electrical junction boxes within enclosure to provide AC power for wireless access points
<b>Connectivity accessories kit (PZNWE12 and PZNWE14)</b>	Simplifies installation by including a two-position Mini-Com <sup>®</sup> outlet box, Mini-Com <sup>®</sup> TX6 <sup>™</sup> PLUS Jack Module, TX6 <sup>™</sup> PLUS Patch Cord, silicone sealant and grounding cable
<b>Shielded connectivity accessories kit (PZNWE12S and PZNWE14S)</b>	Simplifies installation by including a two-position Mini-Com <sup>®</sup> outlet box, Mini-Com <sup>®</sup> TX6 <sup>™</sup> PLUS Shielded Jack Module, TX6 <sup>™</sup> PLUS Shielded Patch Cord, silicone sealant and grounding cable
<b>Provisions for padlocks</b>	Allows the enclosure to be secured against tampering and theft
<b>Optional NEMA 4X rated drain and vent kit</b>	Allows enclosure to breathe to reduce chance of condensation while still maintaining NEMA 4X rating


## applications

Panduit NEMA 4X/IP66 Rated Wireless Access Point Enclosures are used to protect a wireless network from tampering and theft by enclosing WAPs. These products are specifically designed for use in deploying a WAP in outdoor and industrial environments. The universal design of the


enclosures allows customization to accommodate most wireless access points. The NEMA 4X/IP66 Rated Wireless Access Point Enclosure can be customized to meet specific wireless LAN design specifications to provide a flexible, easy to use and install wireless solution.

# NEMA 4X/IP66 Rated Wireless Access Point Enclosures

## External Dimensions




## Internal Dimensions

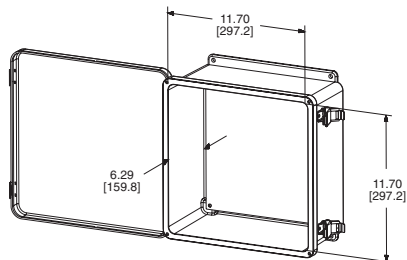

## PZNWE12 and PZNWE12S




Designed for  
Power over Ethernet Applications




Drain and Vent Kit  
PZNDVK

## External Dimensions




## Internal Dimensions

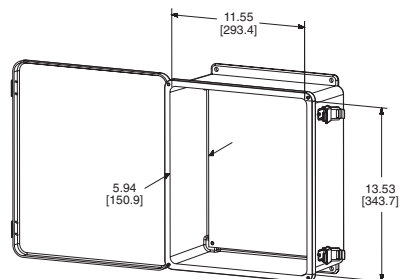

## PZNWE14 and PZNWE14S



Designed for  
Traditional AC Power Applications

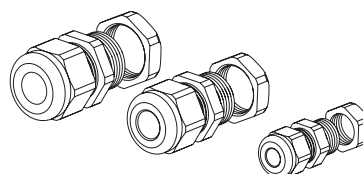

NEMA 4X Fittings  
PZNF3, PZNF2, PZNF1

Dimensions are in inches [Dimensions in brackets are metric]

## WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com/ia](http://www.panduit.com/ia)  
[iai@panduit.com](mailto:iai@panduit.com)

**PANDUIT**<sup>®</sup>

©2016 Panduit Corp.  
ALL RIGHTS RESERVED.  
ZCSP14--WW-ENG  
1/2016