
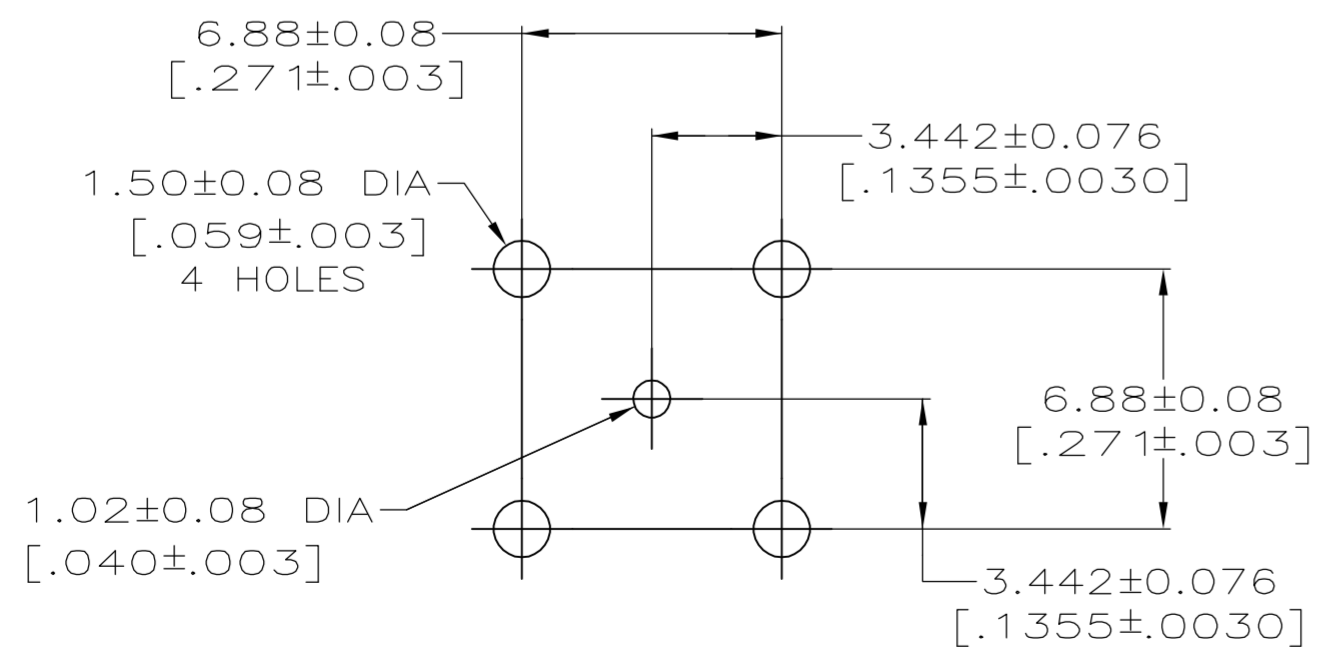


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16	A	REVISED PER EC OS14-0150-05	01SEP05	BM JL

- ① ZINC PER QQ-Z-363
- ② BERYLLIUM COPPER PER ASTM-B-196
- ③ PTFE PER MIL-P-19468
- ④ GOLD PLATE PER MIL-G-45204
0.76 μm [.000030] MINIMUM THICK.
- ⑤ TIN PLATE PER ASTM-B-545,
3.04 μm [.000120] MINIMUM THICK.
- 6. SEE INSTRUCTION SHEET 408-9889.
- ⑦ NICKEL PLATE PER QQ-N-290
5.08 μm [.000200] MINIMUM THICK.

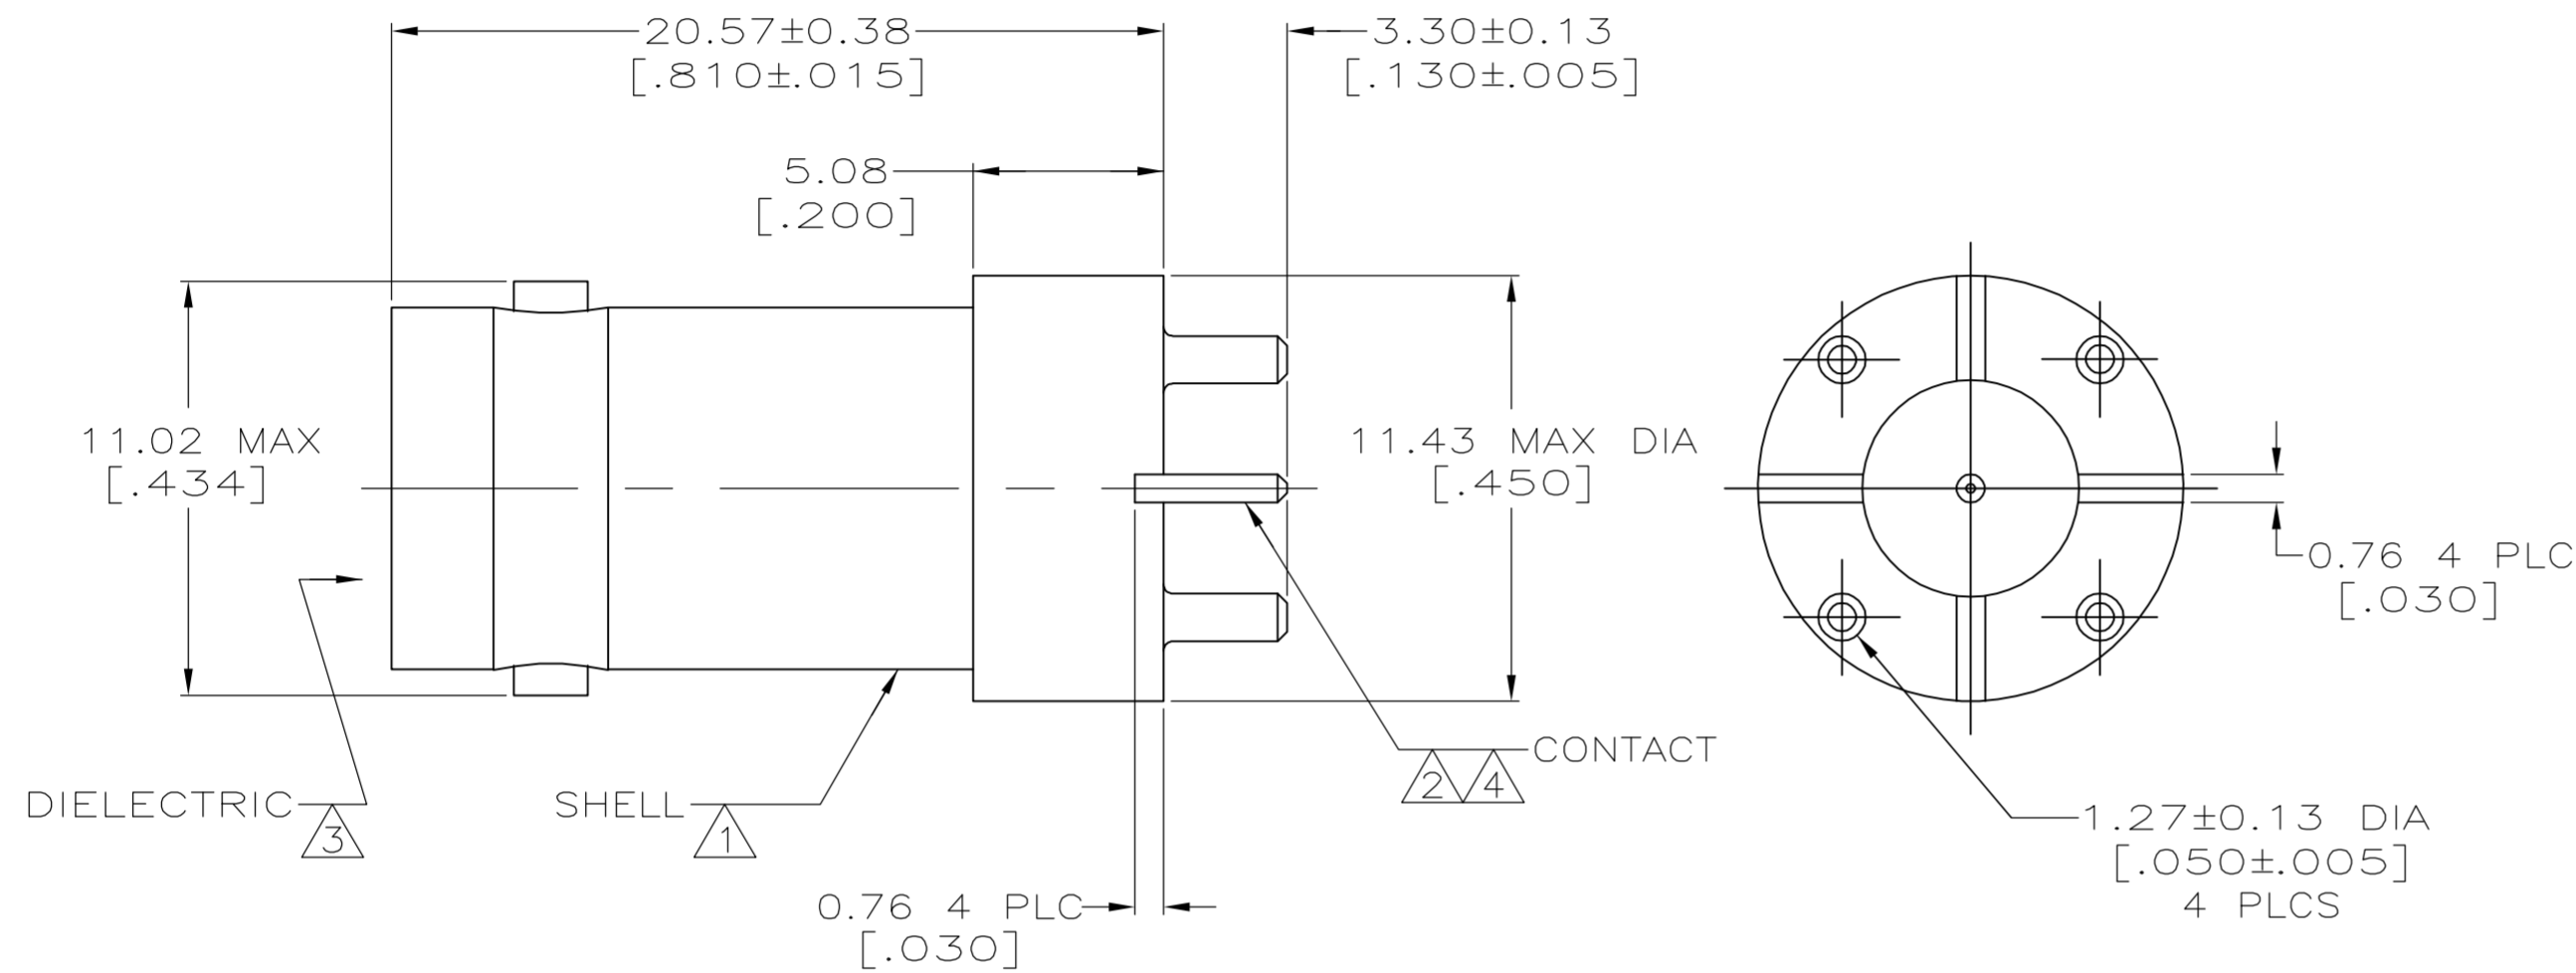

PCB CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. VARELA - DOCK5 02FEB2005	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK J. HAVENER 02FEB2005	NAME JACK, VERTICAL, PCB, 75 OHM, COMMERCIAL BNC	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. LIPPERT 02FEB2005	PRODUCT SPEC 108-12078	
0 PLC ± -		APPLICATION SPEC		
1 PLC ± -		SIZE A2		
2 PLC ± 0.20 [.008]		CAGE CODE 00779		
3 PLC ± -		DRAWING NO 6274291		
4 PLC ± -		RESTRICTED TO		
ANGLES ± -		SCALE 5:1		
FINISH		SHEET 1 OF 1		
MATERIAL SEE NOTES 1 - 3		REV A		
SEE NOTES 4, 5		CUSTOMER DRAWING		