File No.	432	SHEET	1 /1



Recommended P.C.Board Hole Layout

SPECIFICATIONS

Current Rating: 1.5 Amp
Insulator Resistance: 1000 Megohms Min.
Contact Resistance: 20 Milliohms Max.
Dielectric Withstanding: AC 500V/Minute
Operating Temperature: −40°C To +105°C
Contact: Phosphor Bronze,Gold Flash Over All
⚠1 Insulator: Polyester,PA6T+30%GF,UL 94V−0

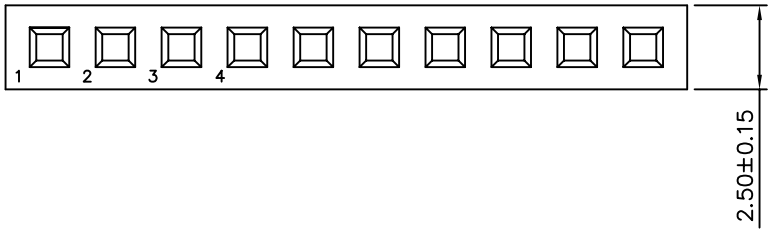

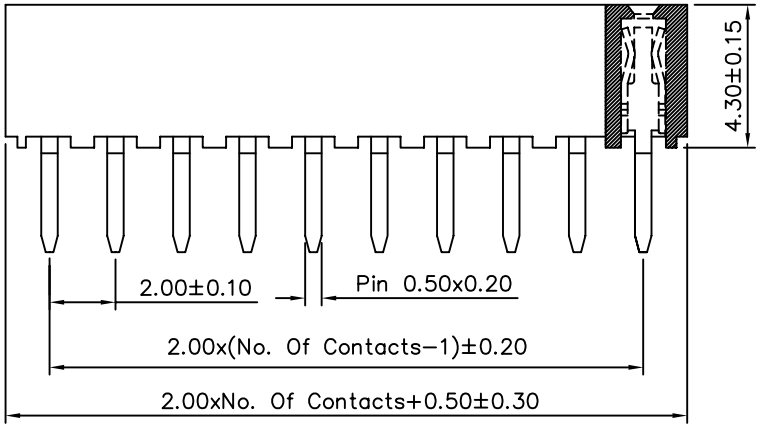



4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
00286	MEI	.X ±0.38
	CHECKED BY BECKY	.XX ±0.25
	DRAWING BY HZF	.XXX ±0.12
SCALE NONE	REV. B1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠1	B1	Modify PA66 → PA6T	SHIN	02/06/2006
⚠0	B0	NEW RELEASE	BECKY	09/30/2005