
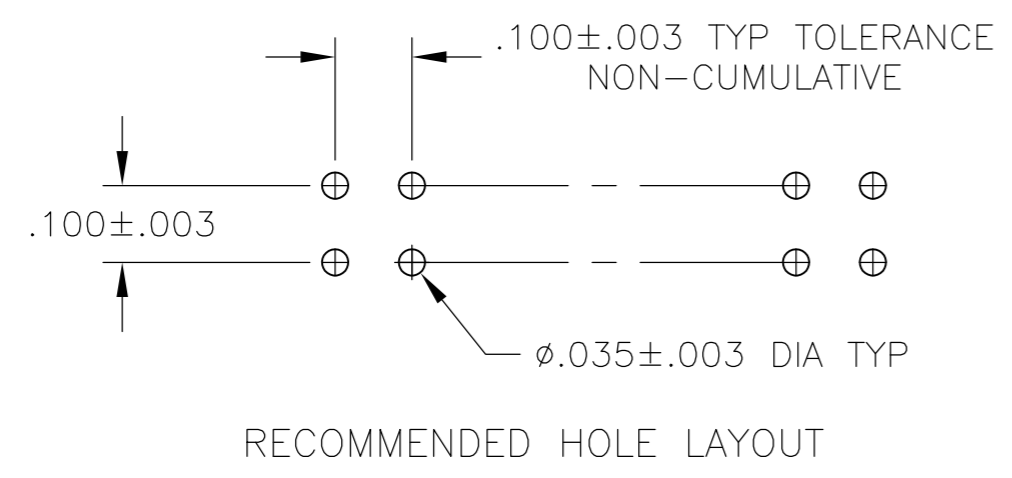


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	K	REVISED PER ECO-14-000066	30JUN2014	NK MM

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3 OBSOLETE PART NUMBER
- 4 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 5 POSTS : .000030 GOLD IN THE CONTACT AREA, .000200 - .000300 MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- 6 POSTS : .000030 GOLD IN THE CONTACT AREA, .000200 - .000300 MATTE TIN ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

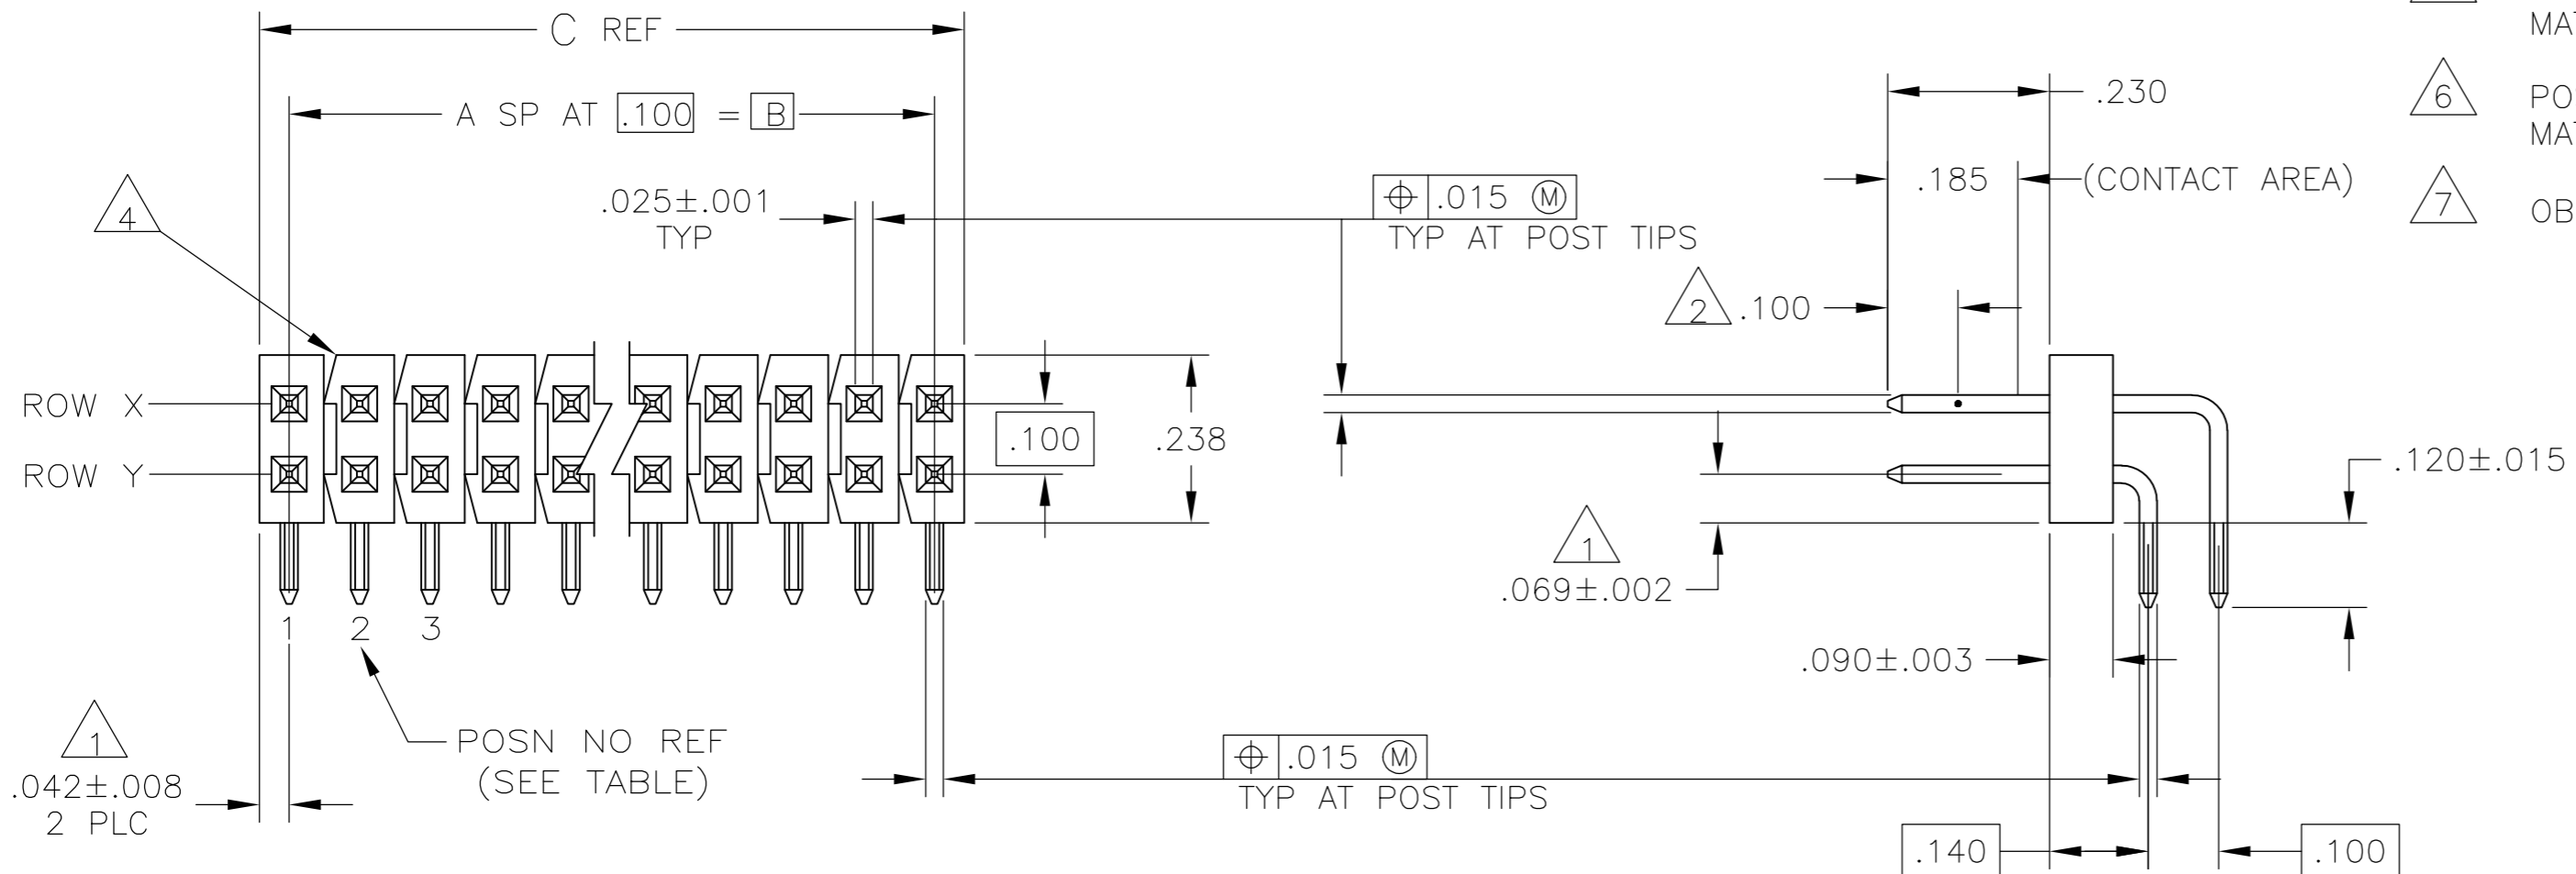

7	OBSOLETE	6	NONE	NONE	50	2.484	2.400	24	50	5-104232-3
7	OBSOLETE	6	NONE	NONE	80	3.984	3.900	39	80	5-104232-2
7	OBSOLETE	5	NONE	NONE	50	2.484	2.400	24	50	104232-3
		5	NONE	NONE	80	3.984	3.900	39	80	104232-2
	OBSOLETE	5	10	NONE	25	1.284	1.200	12	26	104232-1
	PLATING	ROW X	ROW Y	ACTIVE NO OF POSN	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	
		POSTS OMITTED								

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	H MOLL	24-2-87
CHK	T. CLARK	27-2-87
APVD	T. CLARK	27-2-87
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT	-	

STE TE Connectivity

NAME: HEADER ASSY, MOD II, BREAKAWAY, RIGHT ANGLE, DOUBLE ROW, .100X.100 C/L, W/ .025 SQ POSTS

SIZE	A2	CAGE CODE	00779	DRAWING NO	C=104232	RESTRICTED TO	-
SCALE	4:1	SHEET	1 of 1	REV	K		

CUSTOMER DRAWING