

# Type 1/2 surge protection plug - VAL-MS-T1/T2 600DC-PV-ST - 2801165


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Replacement plug for PV arrester combinations from the VAL-MS-T1/T2 600DC-PV-... product range



## Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 714280
GTIN	4046356714280

## Technical data

### Dimensions

Height	52.4 mm
Width	17.5 mm
Depth	55.3 mm
Horizontal pitch	1 Div.

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	60g (Half sine/11 ms/3x #X#Y#Z)
Vibration (operation)	7.5g (5-500 Hz/2.5 h/XYZ)

### General

IEC test classification	PV I / II
	PV T1 / T2
EN type	T1 / T2
SPD failure behavior	OCM (Open-circuit mode)

# Type 1/2 surge protection plug - VAL-MS-T1/T2 600DC-PV-ST - 2801165

## Technical data

### General

Installation location	Inside
Accessibility	Accessible
Installation location of the disconnect device	Internal
Mounting type	On base element
Color	jet black RAL 9005
Housing material	PA 6.6-FR
Degree of pollution	2
Flammability rating according to UL 94	V-0
Surge protection fault message	optical

### Protective circuit DC voltage side (DC)

Maximum continuous operating voltage $U_{CPV}$	360 V DC
Open circuit voltage $U_{OCSTC}$	$\leq 300$ V DC
Short-circuit current rating $I_{SCPV}$	1000 A
Continuous operating current $I_{CPV}$	$< 20$ $\mu$ A
Standby power consumption $P_C$	$\leq 10$ mVA
Nominal discharge current (8/20) $\mu$ s	15 kA
Maximum discharge current $I_{max}$ (8/20) $\mu$ s	40 kA
Impulse discharge current (10/350) $\mu$ s, charge	2.5 As
Impulse discharge current (10/350) $\mu$ s, specific energy	6.25 kJ/ $\Omega$
Impulse discharge current (10/350) $\mu$ s, peak value $I_{imp}$	5 kA
Voltage protection level $U_p$	$\leq 1.4$ kV
Residual voltage $U_{res}$	$\leq 1.4$ kV (at $I_n$ )
	$\leq 1.1$ kV (at 5 kA)
	$\leq 1.2$ kV (at 10 kA)
	$\leq 1.5$ kV (at 20 kA)
	$\leq 1.6$ kV (at 30 kA)
	$\leq 1.8$ kV (at 40 kA)
Response time $t_A$	$\leq 25$ ns
Insulation resistance $R_{iso}$	$> 5$ G $\Omega$ (at 500 V DC)

### UL specifications

SPD Type	4CA
Maximum continuous operating voltage MCOV (L+) - G	720 V DC
Nominal voltage	600 V DC
Mode of protection	(L+) - G
Power distribution system	1
Measured limiting voltage MLV (L+) - G	1500 V
Nominal discharge current $I_n$ (L+) - G	20 kA

### Standards and Regulations


# Type 1/2 surge protection plug - VAL-MS-T1/T2 600DC-PV-ST - 2801165

## Technical data

### Standards and Regulations

Standards/regulations	EN 50539-11 2013
-----------------------	------------------

## Drawings

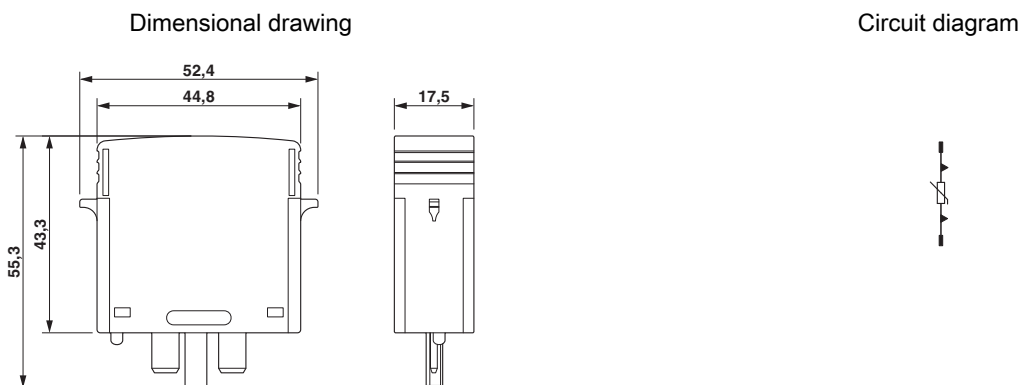

## Approvals

### Approvals

#### Approvals

UL Recognized / KEMA-KEUR / cUL Recognized / EAC / cULus Recognized

#### Ex Approvals

### Approval details

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 330181
---------------	--	---	---------------

KEMA-KEUR		<a href="http://www.dekra-certification.com">http://www.dekra-certification.com</a>	2171492.01
-----------	--	---	------------

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 330181
----------------	--	---	---------------

## Type 1/2 surge protection plug - VAL-MS-T1/T2 600DC-PV-ST - 2801165

### Approvals

EAC		RU C- DE.A*30.B01561
-----	---	-------------------------

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>
------------------	---	---

Phoenix Contact 2017 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>