

Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 0603 X7R 12nF 50V(0603B123K500CT)

#### 1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07


#### 2. Cap, DF, IR @25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 50V, 120sec)

Item	Spec
Cap [nF]	12(±10%)
DF	≤ 2.5%
IR [G-ohm]	>10

#### 3. Impedance/ESR-Frequency


(Equipment: 4287A)

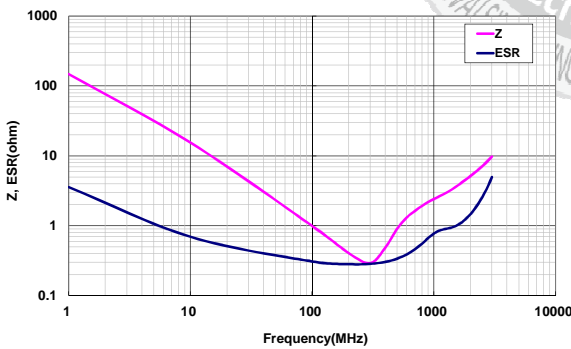

#### 5. Capacitance – DC Voltage Characteristics


(Equipment: 4284A; DC charge 60±5sec)

25V : -3.77% ; 50V : -12.05%

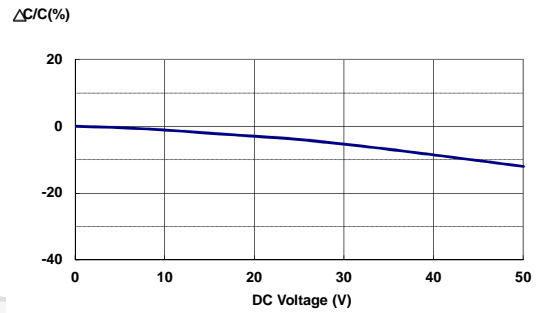


#### 6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

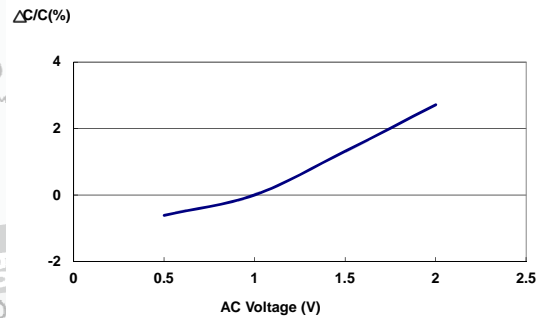

#### 4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

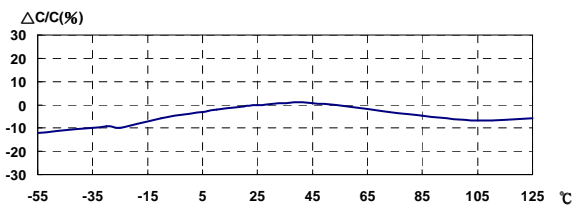

Last updated : 2018/06/13