
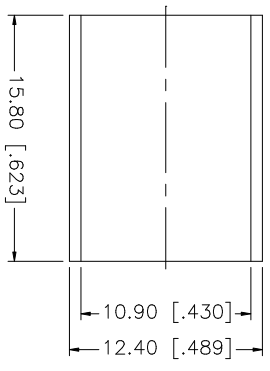
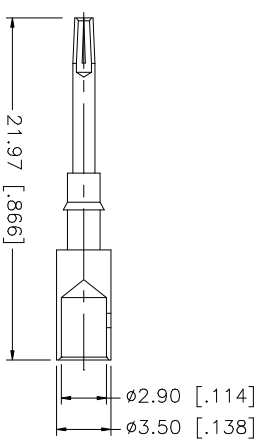
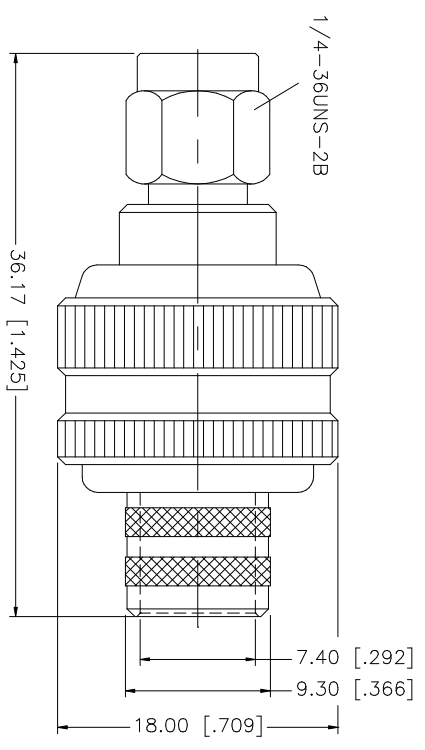


REV.	DATE	DESCRIPTION
NC	08/01/05	INITIAL RELEASE

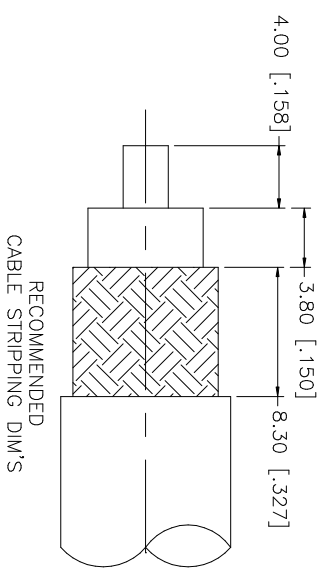

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE ".429"
 2. CONTACT PIN TO SOLDER

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	APPROVALS	DATE	PART DESCRIPTION		
8						0.5 - 8mm ± 0.20mm	.020 - .315 = ± 0.007"	DRAWN	G.R.S.	08/01/05	<p>Amphenol Connex</p> <p>PART DESCRIPTION</p> <p>SMA REVERSE POLARITY CRIMP PLUG (FOR BELDEN 9913, 9914, LMR-400)</p> <p>PART NO. 132298RP</p>	
7						8 - 30mm ± 0.40mm	.315 - 1.180 = ± 0.015"	CHECKED				
6						30 - 120mm ± 0.50mm	1.180 - 4.724 = ± 0.020"	ISSUED				
5	FERRULE	COPPER	GOLD	1				SHEET	1 OF 1			
4	CONTACT PIN	BER. COPPER	GOLD	1				CAD FILE				
3	INSULATOR	TEFLON	NATURAL	1				C:/132/132298RP.DWG				
2	HOUSING/BODY	BRASS	GOLD	1				DWG. NO.	132298RP.DWG	REV. NC	SIZE A	SCALE NA
1	DESCRIPTION							DO NOT SCALE DRAWING				