

System connectors - FLKM 50-PA-AB/IBN - 2289816

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE front adapter, for Allen-Bradley PLC 5, 1771, 32 channels can be connected, input



Key commercial data

Packing unit	1 pc
GTIN	 4 017918 057800
Weight per Piece (excluding packing)	120.0 GRM
Custom tariff number	85369010
Country of origin	Germany

Technical data

General

Nominal voltage U_N	< 50 V AC 60 V DC
Max. permissible current	1 A (per path)
Max. permissible total current	2 A (per Byte, for supply via connector)
Connection type, connector	IDC/FLK pin strip (2.54 mm)
Number of connectors	1
No. of positions, connector	50
Number of positions	50
Mounting position	any
Standards/regulations	IEC 60664 DIN EN 50178 IEC 62103
Pollution degree	2

System connectors - FLKM 50-PA-AB/IBN - 2289816

Technical data

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Supported controller

Controller	ALLEN-BRADLEY PLC 5
- suitable I/O card	1771 IBN

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242208
eCl@ss 7.0	27242208
eCl@ss 8.0	27242208

ETIM

ETIM 2.0	EC001423
ETIM 3.0	EC001423
ETIM 4.0	EC001423
ETIM 5.0	EC002584

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / GOST / cULus Recognized

System connectors - FLKM 50-PA-AB/IBN - 2289816

Approvals

Ex Approvals

Approvals submitted

Approval details

UL Recognized


cUL Recognized

GOST

cULus Recognized

Drawings

Circuit diagram

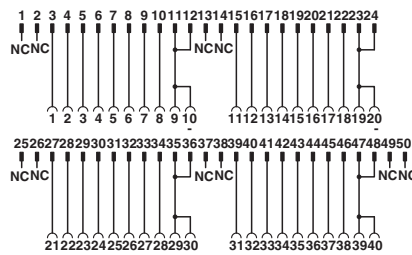

Connection scheme FLKM 50-PA-AB/IBN