

SPECIFICATION FOR APPROVAL



TO: _____

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER			DELTA MODEL	06DPCG5C
ORDER P/N.	06DPCG5C			SAMPLE ISSUE DATE	

1. ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE RATING 115/250VAC
- 1-2. CURRENT RATING
 - A. AT 115VAC 6 A RMS Max.
 - B. AT 250VAC 6 A RMS Max.
- 1-3. OPERATING FREQUENCY..... 50/60 Hz
- 1-4. LEAKAGE CURRENT: EACH LINE TO GROUND
 - A. @115VAC 60Hz 0.40 mA Max.
 - B. @250VAC 50Hz 0.80 mA Max.
- 1-5. HIPOT RATING
 - A. LINE TO GROUND 2250VDC/1Min.
 - B. LINE TO LINE 1700VDC/1Sec.
- 1-6. TEMPERATURE RANGE: -25 TO +100 DEGREE C
- 1-7. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	5	7	20	30	50	60	55	50	35
DIF. MODE dB	/	4	8	8	45	45	45	45	45

1-8. SAFETY

REPORT BY	CHECKED BY	APPROVED BY		
			REV.	


SPECIFICATION FOR APPROVAL



TO: _____


PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER		DELTA MODEL		06DPCG5C
ORDER P/N.	06DPCG5C		SAMPLE ISSUE DATE		

2. PHYSICAL DIMENSIONS:

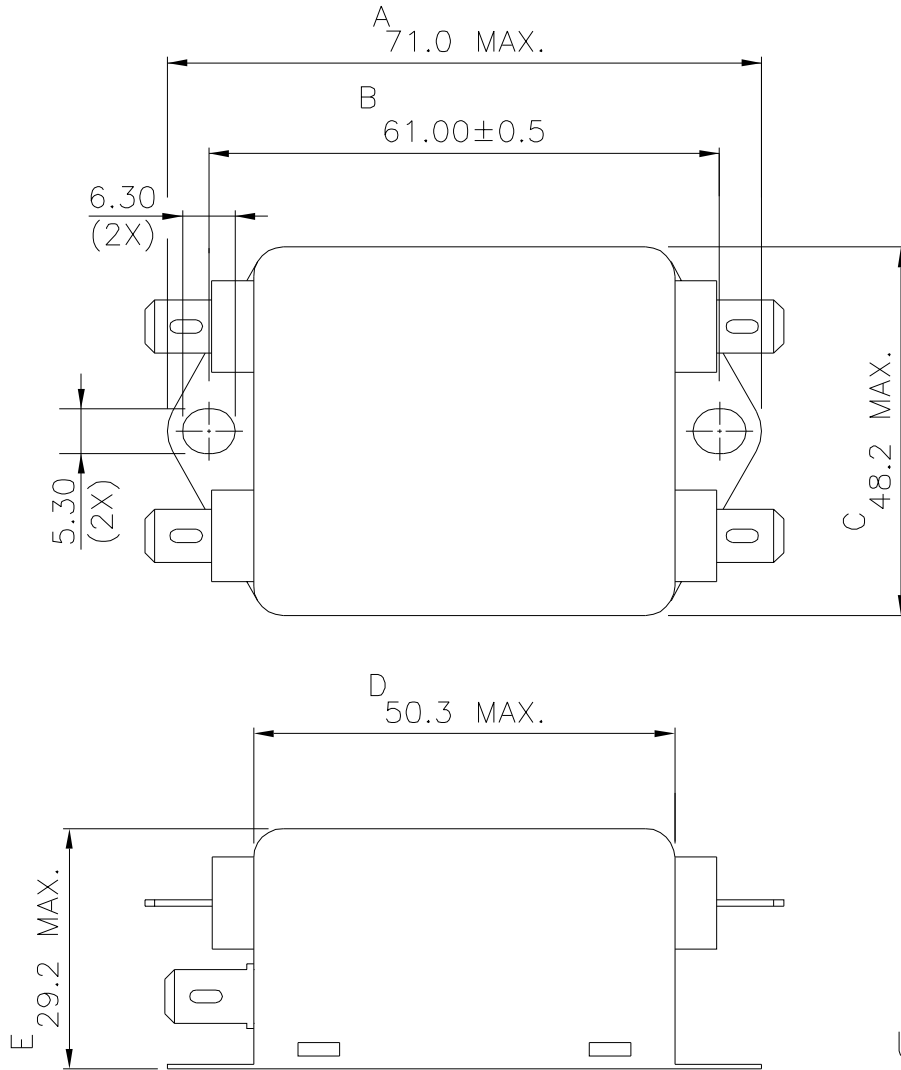

UNIT: mm

3. SCHEMATIC:

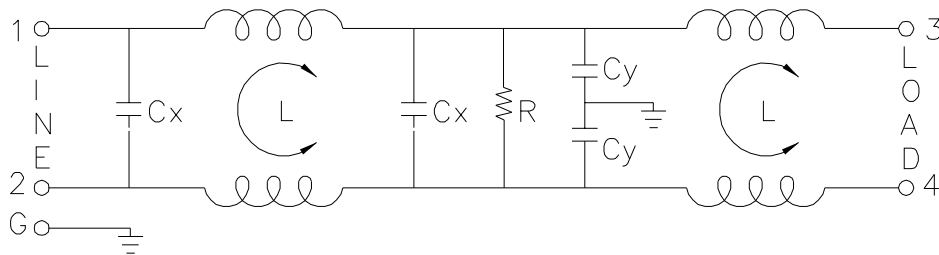

L: 0.97mH
 Cx: 0.22uF
 Cy: 4700pF
 R: 1.0MΩ

REPORT BY	CHECKED BY	APPROVED BY	UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCE		
			DCEIMALS .X±	.XX±	ANGLES±
			REV.		