


LOC	DIST	REVISIONS					
GP	0	F	LTR	DATE	DWN	APPD	
		F		OBSOLETE: -1 PER OS11-0143-02	11FEB2003	DD	KK

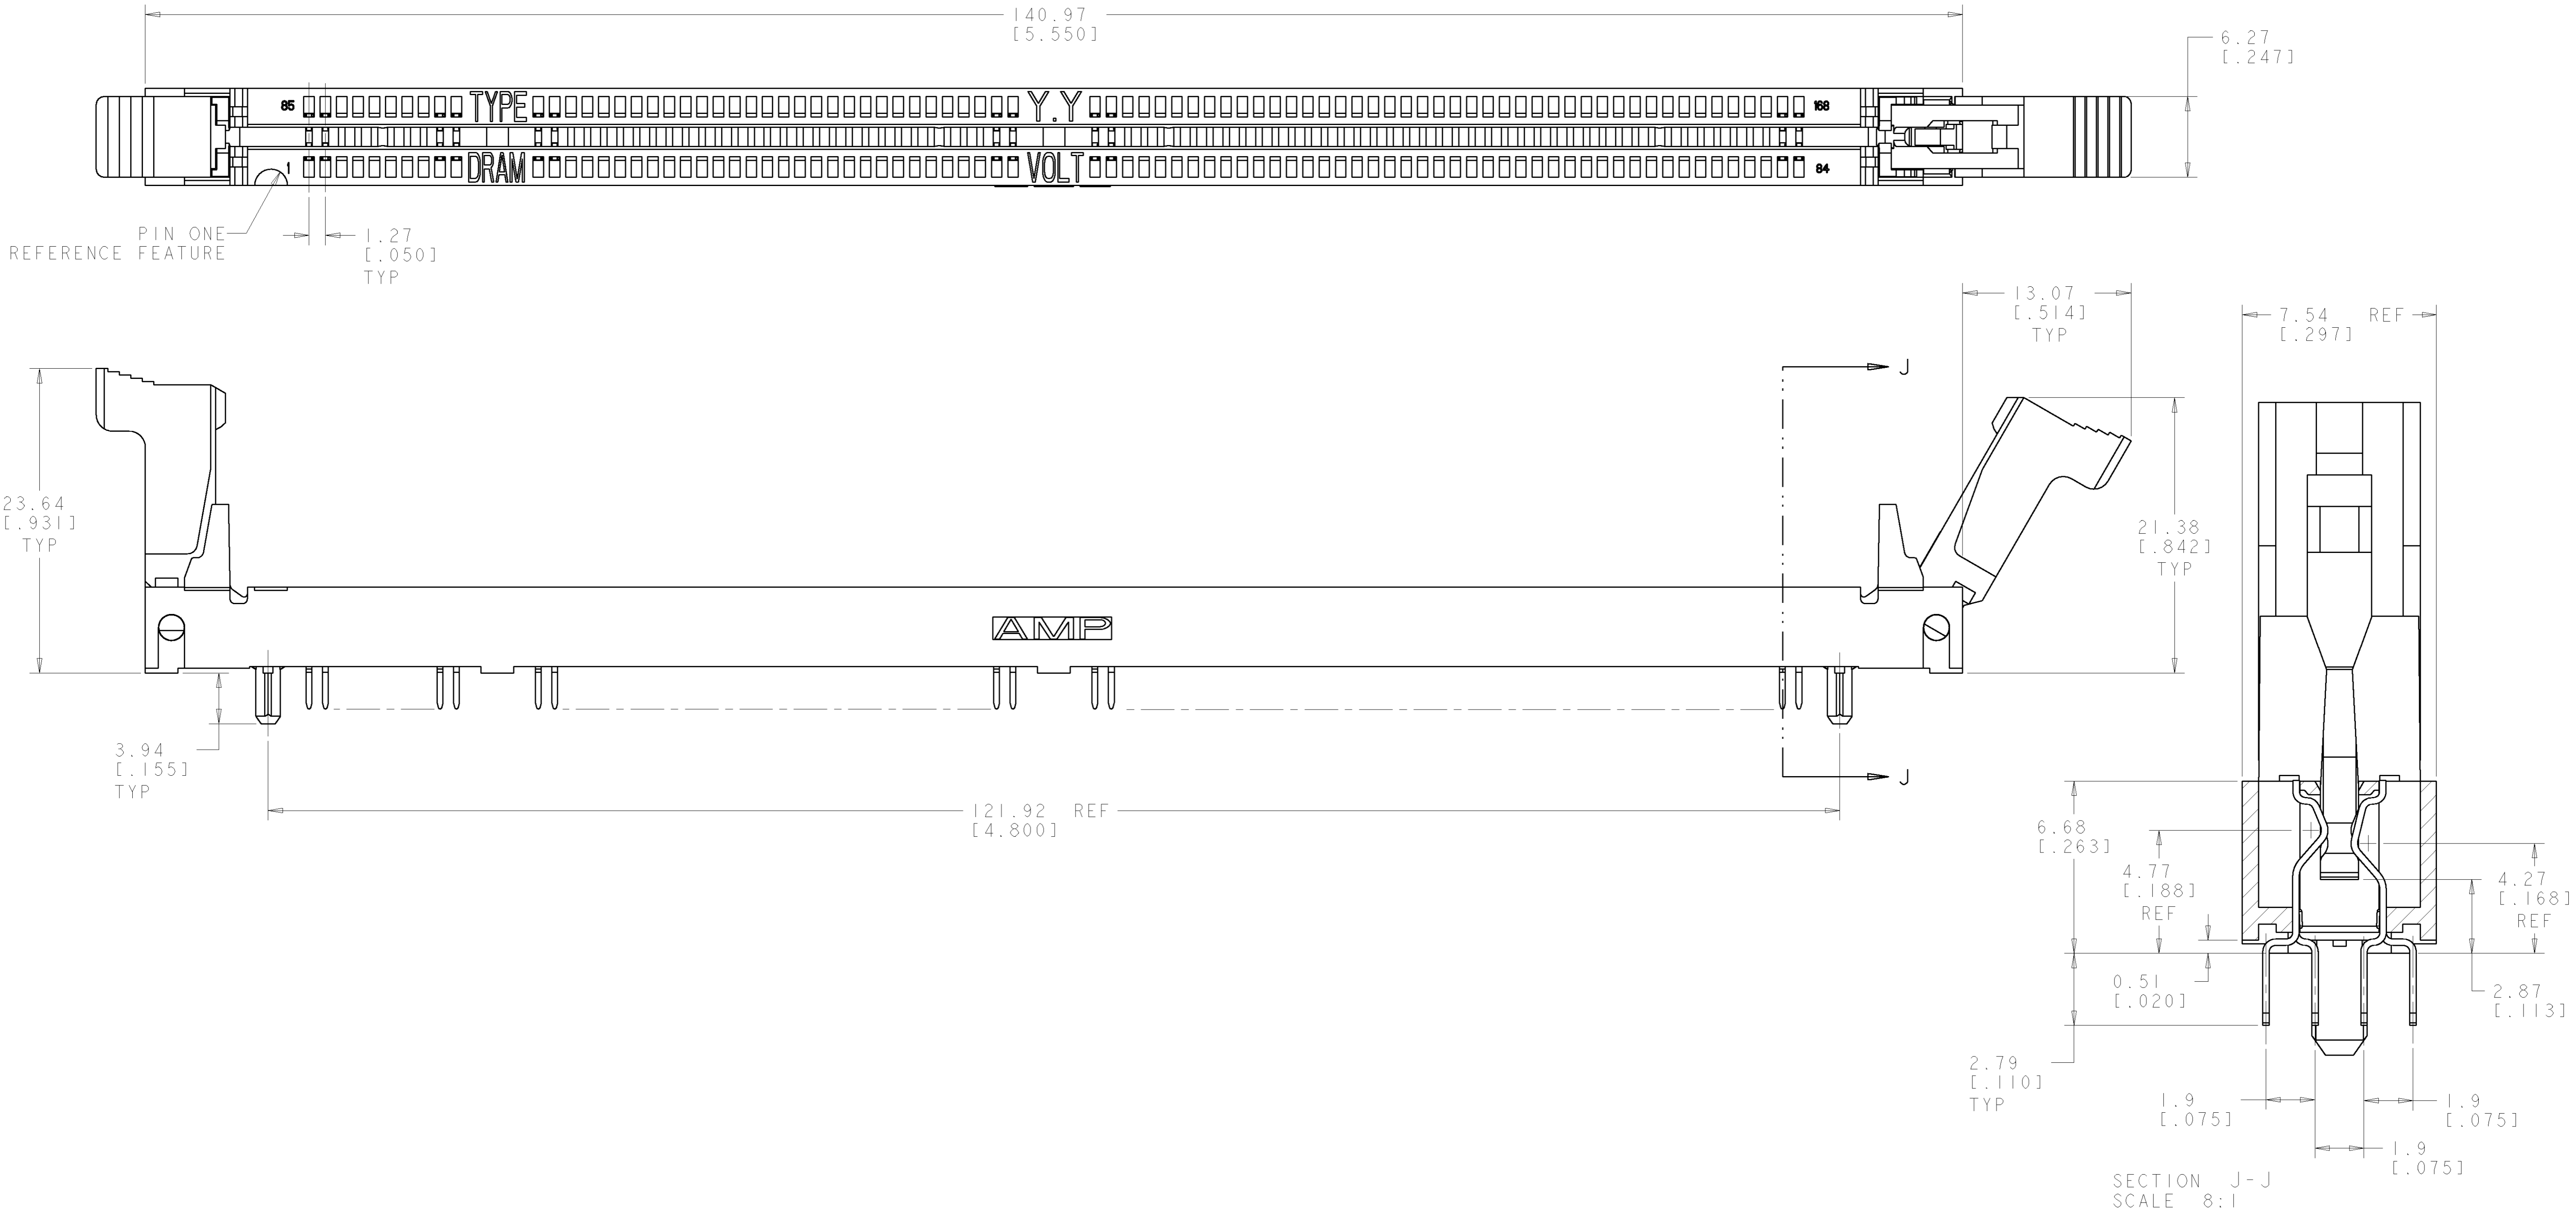

DETAIL C	DETAIL A	NON-BUFFERED DRAM, 3.3 VOLT	390040-6	OBSOLETE
DETAIL B	DETAIL A	SYNC DRAM, 3.3 VOLT	390040-5	
DETAIL A	DETAIL A	STD DRAM, 3.3 VOLT	390040-4	
DETAIL A	DETAIL B	STD DRAM, 5 VOLT	390040-1	
KEY #1	KEY #2	PART DESCRIPTION	PART NUMBER	

- △ FOR OPTIMUM PERFORMANCE, CONTACT PAD PLATING SHOULD BE SMOOTH AND FLAT, COPPER CONTACT PADS ARE TO BE OVERPLATED WITH 0.00127[.00050] MIN THK NICKEL FOLLOWED WITH 0.00127[.00040] MIN THK GOLD PLATING.
- △ CONTACT MATING AREA:  
 0.00076[.00030] MIN THICK GOLD OVER 0.00381[.000150] NICKEL  
 OR GOLD FLASH OVER 0.00051[.00020] MIN THK 80/20 PALLADIUM-NICKEL.  
 SOLDER TAILS: 0.00381[.000150] MIN THK TIN-LEAD UNDERPLATE:  
 0.00127[.00050] MIN THK NICKEL OVER ENTIRE CONTACT.
- △ MATERIAL:  
 HOUSING AND EXTRACTORS: GLASS FILLED, HIGH TEMPERATURE NYLON.  
 CONTACTS: PHOS BRONZE

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN		AMP INCORPORATED	
mm	[INCHES]	0 PLC	±	HW_SORAH	26-APR-96	Harrisburg, PA 17105-3608	
0 PLC	±	1 PLC	±0.13 [0.005]	CHK	R_TALLEY	NAME	
2 PLC	±	3 PLC	±	APPD	S_HOWELL	PRODUCT SPEC	
4 PLC	±	5 PLC	±	APPLICATION SPEC		SIZE	
ANGLES	±	FINISH	±	WEIGHT		CAGE CODE	
MATERIAL		FINISH		CUSTOMER DRAWING		DRAWING NO	
						A1 00779	
						SCALE 1:1 SHEET 1 OF 2 REV F	

