


Compact Push Type Power Switches

Malaysia

Series: **R2**

Type: **ESB92D**

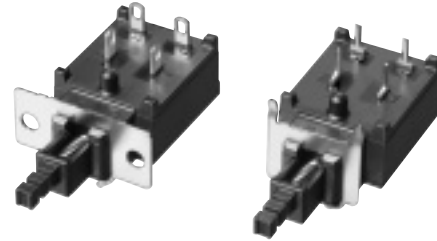

High reliability type (applicable to practical rates of usage)


■ Features

- Available for both DPST and SPST
Available for equipment subject to inrush current (128 A)
- Special heat resistant structure
- Meets the world's major safety standards
- Rapid switching structure, applicable to IEC60065 6th edition (Refer to the notes.)
- Cadmium-free contact

■ Recommended Applications

- AV Equipment: TVs and audio systems
- OA Equipment: PCs, monitors, printers, etc.

■ Explanation of Part Numbers

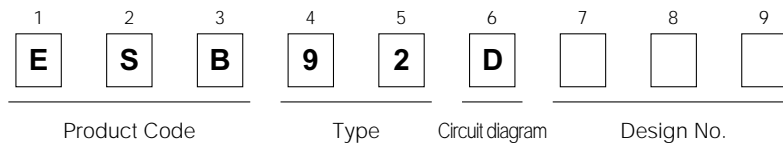

■ Specifications

Rating	TV-5, 5 A 250 Vac (UL, CSA) 4 A/128 A 250 Vac (European standards)		
Safety Standards	UL, CSA, VDE, BEAB, SEMKO, FIMKO, SEV, DEMKO, NEMKO		
Circuit Diagram	DPST		
Operating Force	Circuit	Lock Travel	
	DPST	1.5 mm	2.5 mm
Travel	8.0 N±3.0 N		8.0 N±3.0 N
	Lock Travel: 2.5 mm, Full Travel: 3.5 mm		
Minimum Quantity/Packing Unit	Lock Travel: 1.5 mm, Full Travel: 2.5 mm		
	25 pcs. Polyethylene Bag (Bulk)		
Quantity/Carton	300 pcs.		

* OA equipment: PCs, monitors, printers, etc.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

