




ISOMETRIC
SCALE: 3:1



O.P. (MM)	P.T. (MM)
7.0 ± 0.2	.35 Max.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
 - ▲3. RATING: 3A @125VAC
1.5A @250 VAC UL
 - ▲4. OPERATING FORCE: 70 ± 20 GRAMS
 5. OPERATING TEMP: -25°C TO 75°C
 6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
 7. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
 8. DIELECTRIC STRENGTH: 500VAC - 1 MINUTE
 9. ▲ DENOTES CRITICAL PARAMETER.
 10. 2002/95/EC (ROHS) COMPLIANT
 11. PACKAGED IN TRAYS, 200 PIECES PER TRAY

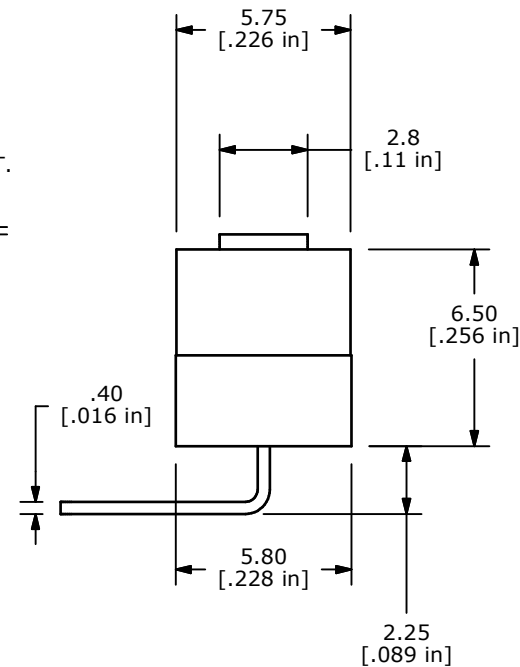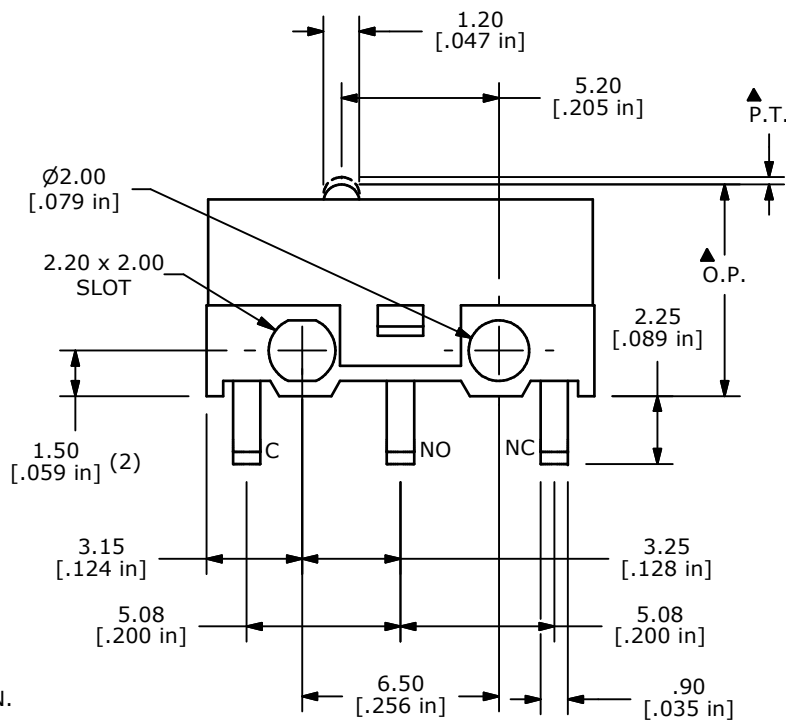

TITLE SS0750300F070V1A

A	18152	RELEASE FOR PRODUCTION	6/27/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
4:1	6/27/2008	BLR	Q971018	A