


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

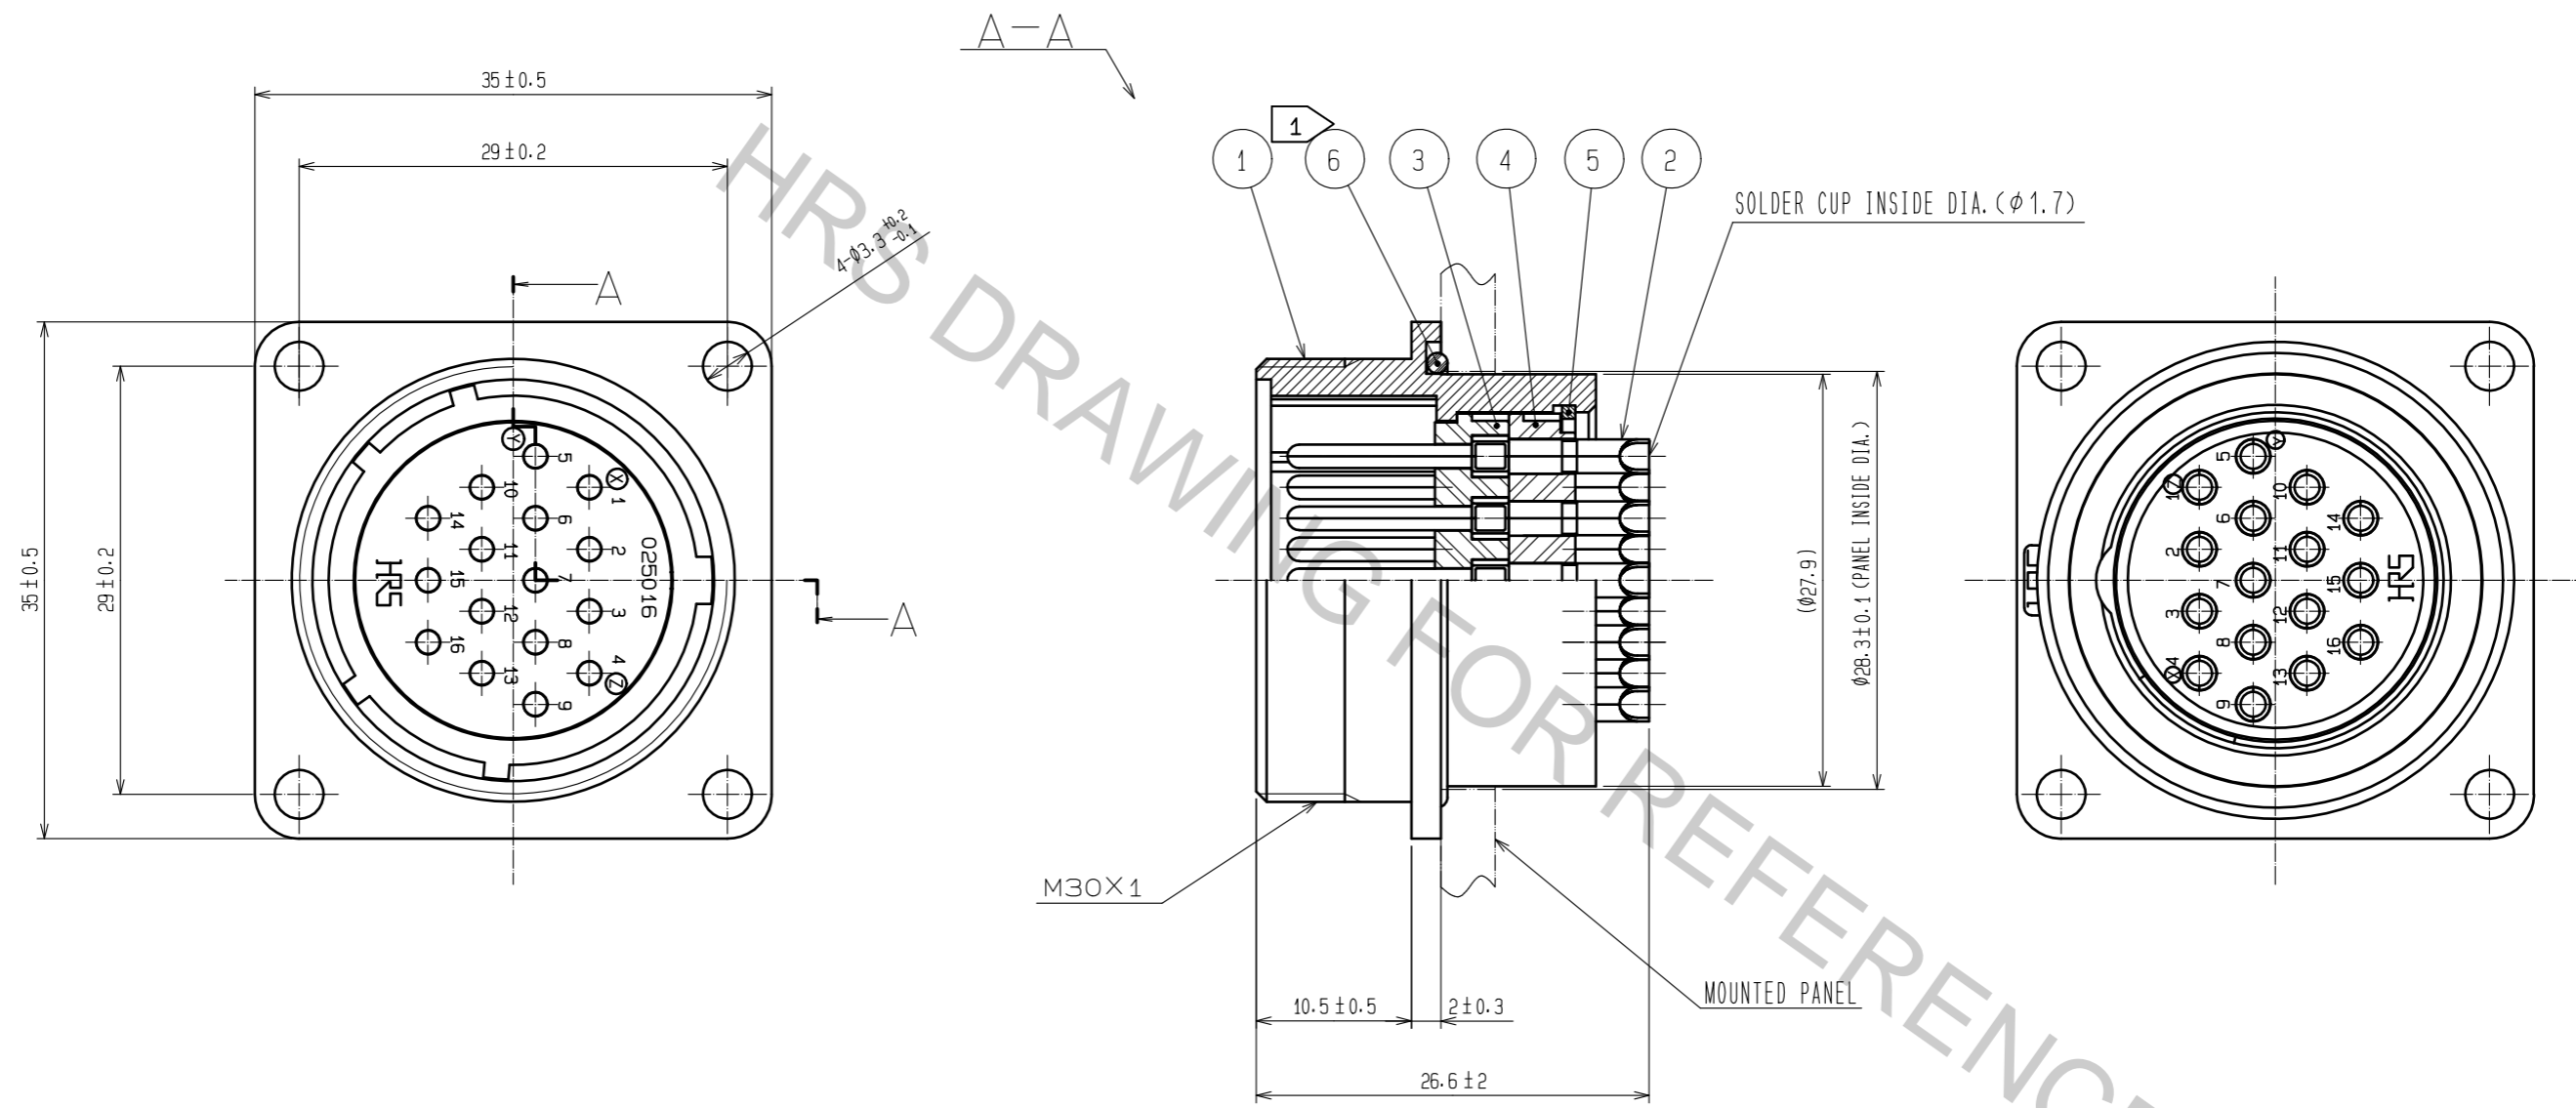

NOTE ① MAKE SURE THAT REF. NO. ⑥ DOES NOT HAVE ANY FACTORS TO REDUCE WATER-RESISTANCY.
 SUCH AS SCRACH, TWIST, PINGHING, OR DUST.

NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS
3	PHENOL-FORMALDEHYDE	(BLACK)	UL94V-0	6	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)	
2	COPPER ALLOY	SILVER PLATING	3 μm min.	5	PHOSPHOR BRONZE	NICKEL PLATING	
1	ALLUMINUMU ALLOY	BLACK CHROME PLATING		4	PHENOL-FORMALDEHYDE	(BLACK)	UL94V-0

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED : HY. KOBAYASHI			18.02.22	DRAWING NO. EDC-110585-31-00		
CHECKED : HY. KOBAYASHI			18.02.22	PART NO. JR25WR-16P(31)		
DESIGNED : TH. KAMEYA			18.02.22	CODE NO. CL114-2032-9-31		
DRAWN : MK. INOUE			18.02.13	1/1		