MATERIALS AND FINISHES

BODY ZINC ALLOY
PLATED NICKEL

CENTER CONTACT PHOSPHOR BRONZE
PLATED GOLD

INSULATOR POLYPROPYLENE (94-V0)

HOUSING POLYESTER BUTYLENE TEREPHTHALATE
COLOR BLACK

MOUNTING POST BRASS
PLATED TIN

SOLDER TAIL COPPER OVER STEEL WIRE
PLATED TIN

WASHER PHOSPHOR BRONZE
PLATED NICKEL

JAM NUT BRASS
PLATED NICKEL

LEADS ARE TO BE
ADJUSTED AS NEEDED TO
FIT PCB PATTERN

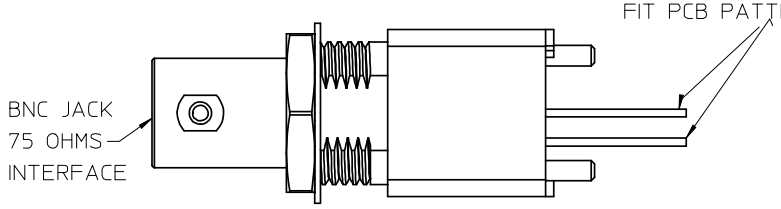



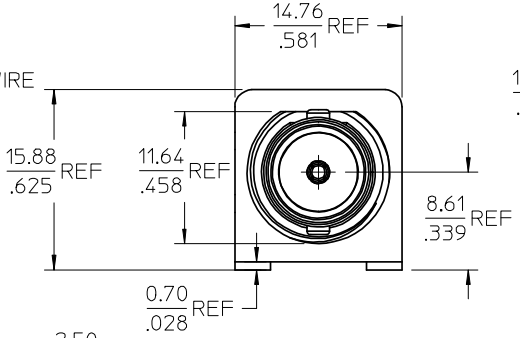

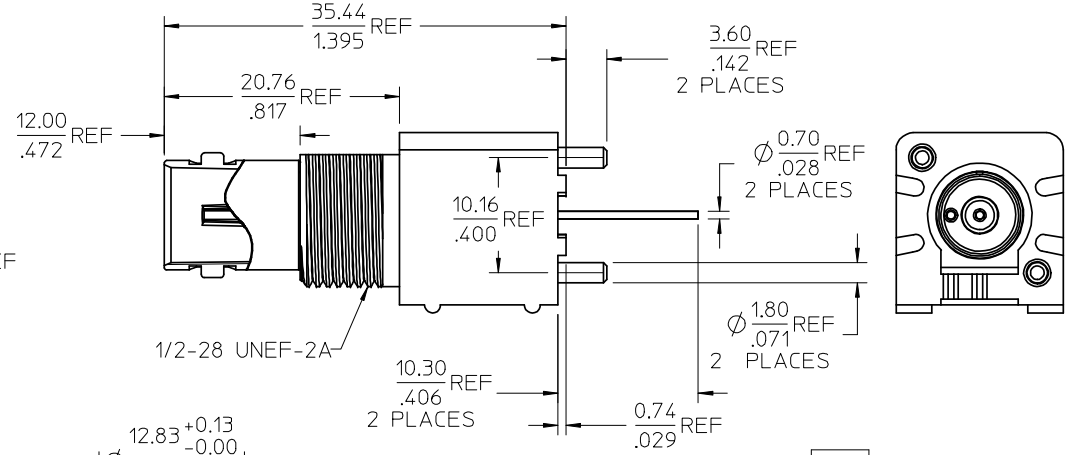

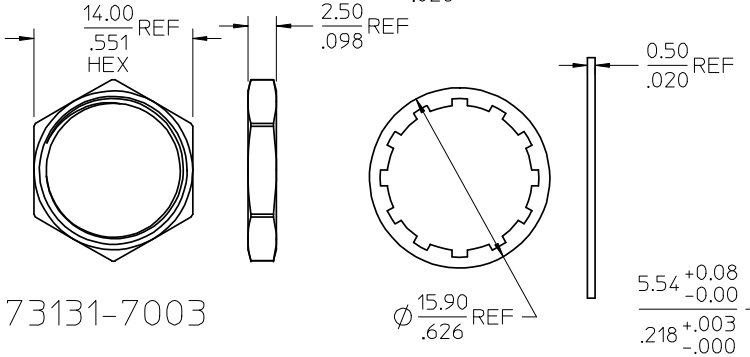



RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS 5.50 (.217)
RECOMMENDED MOUNTING TORQUE:
1.36 N-M (12 INCH-LBS)

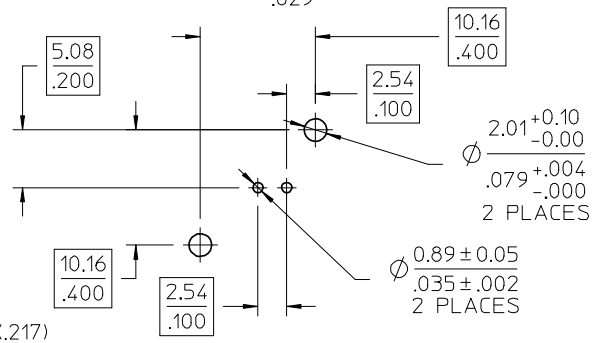

RECOMMENDED PCB HOLE
CONFIGURATION

PART # 73131-7003

TRAY PACK

PS-73598-0051	PRODUCT SPECIFICATION
SPECIFICATION	DESCRIPTION

CHG: REDREW IN SD
MATERIAL FOR
INSULATOR WAS
POLYPROPYLENE
(94V2)
EC NO: URF2008-0493 2008/03/28
DRWN: JWIENER 2008/03/28
CH'KD: SSHAH
APPR: JWIENER
DESCRIPTION
B1
REV

QUALITY SYMBOLS
▼=0
Ⓒ▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: DANG DATE: 1993/03/17
CHECKED BY: DATE:
APPROVED BY: RWOLFF DATE: 1993/03/15

TITLE: BNC JACK, VERTICAL PCB, 75 OHMS
BNC-J/BLK/PCB

MOLEX INCORPORATED

MATERIAL NO.: 731317003
DOCUMENT NO.: SD-73131-7003
SHEET NO.: 1 OF 1

SIZE C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION