

SUMMARY

Wires

| | |
|---------|---|
| Low | 0 |
| High | 0 |
| Coax | 1 |
| Triax | 0 |
| Quad | 0 |
| Fiber | 0 |
| Fluidic | 0 |



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

| | |
|------------------|----------------|
| Series | 1E |
| Termination type | Male solder |
| IP rating | 68 |
| Cable Ø | 6.10 - 6.50 mm |
| Matching parts | ERA.1E.275.CTL |
| Status | |
| Alternative part | |

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|---|
| Shell Style/Model | FFA*: Straight plug, cable collet and nut for fitting a bend relief |
| Keying | Circular (can rotate), plug has male contact(s) |
| Housing Material | Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces |
| Cable Fixing | C65: 6.1 - 6.5 mm |
| Variant | Z : Nut for fitting a bend relief |

Performance

| | |
|---------------|--------------------------|
| Configuration | 1E.275 : 1 Coax (75 Ohm) |
| Insulator | T: PTFE |
| Rated Current | 10 Amps |

Specifications


| | |
|---------------|---|
| Contact Type: | Solder |
| Vtest: | 2400 V (AC), 3300 V (DC) |
| Impedance: | 75 Ohm |
| VSWR: | 1.02 + 0.08 * f/GHz |
| Cable type: | RG 179 B/U, RG 187 A/U, RG 58 C/U, RG 302 /U, RG 400 /U, 2YCCY, RG 59 B/U, RG 223 /U, HF-5408 |

Others

Endurance (Shell): 5000 mating cycles
Temp (min / max): -55°C / +200°C
Humidity (max): ≤95% [at 60 deg C / 140 F]
Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Salt Spray Corrosion: >1000 hr
Climatical Category: 50/175/21
Shielding (min): 95 dB (10 MHz)
Shielding (min): 80 dB (1 GHz)
IP Rating: 68

DRAWINGS

Draws

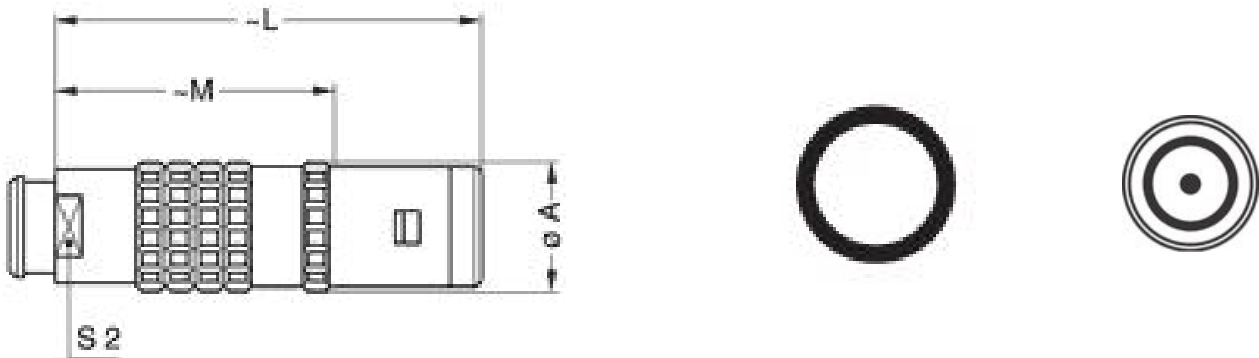

Dimensions

| | A | L | M | S2 |
|-----|------|------|------|------|
| mm. | 13 | 42 | 28 | 9 |
| in. | 0,51 | 1,65 | 1,10 | 0,35 |

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.1E.008.PA090
Caps: BFA.1E.100.NAS

Cables