


PRODUCT CODE: AYL4845

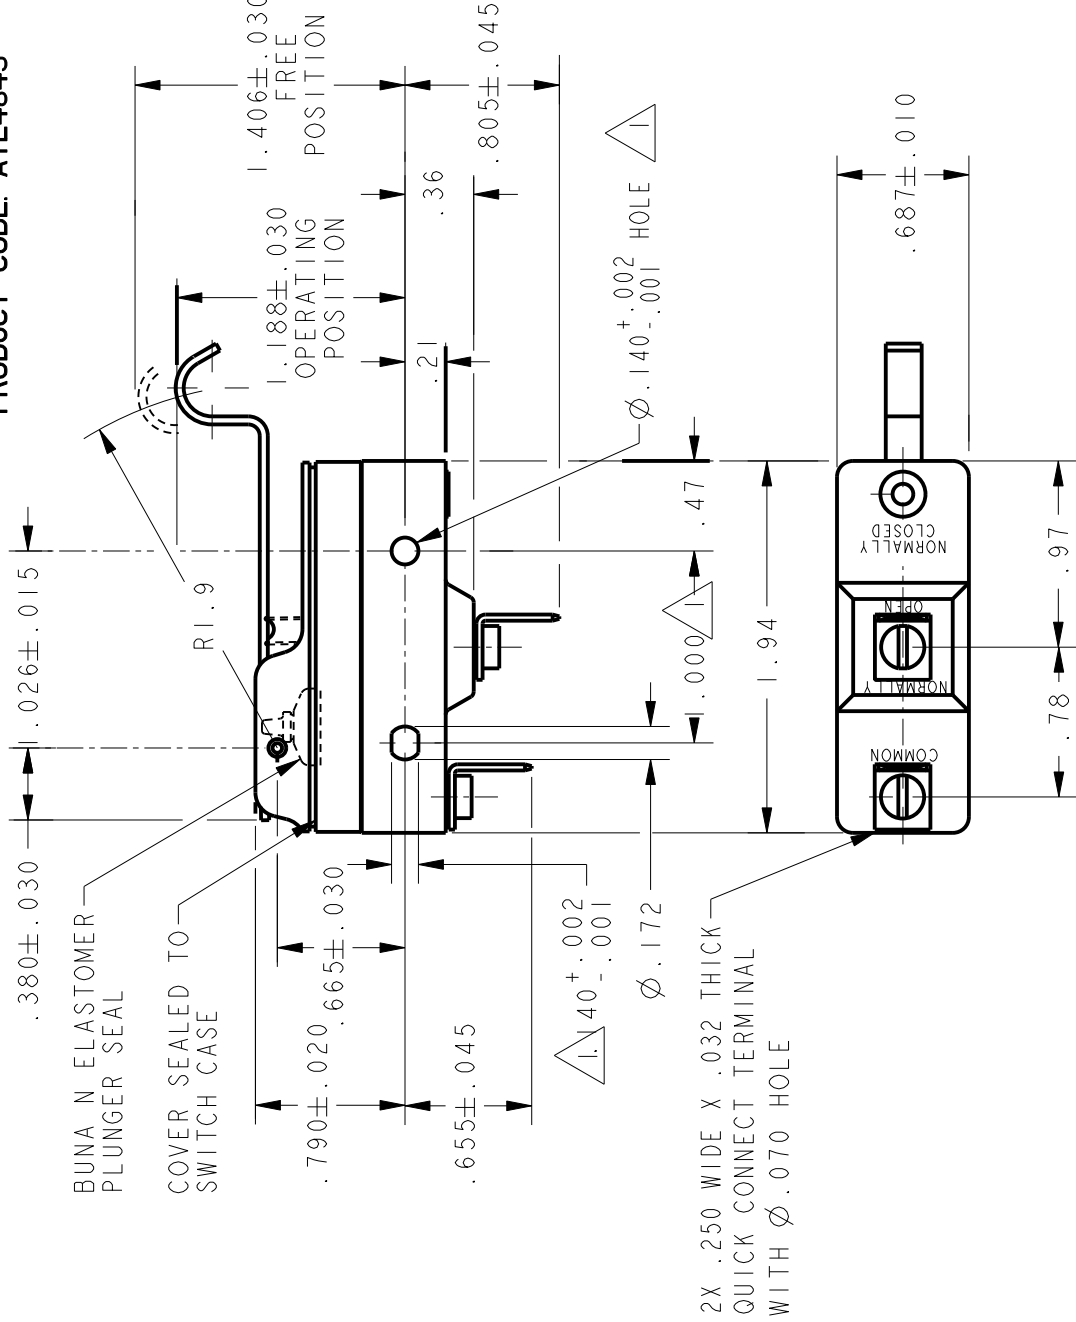

2X .250 WIDE X .032 THICK QUICK CONNECT TERMINAL WITH ∅.070 HOLE

NOTES

- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF ∅.139 MAX ON 1.000 ± .002 CENTERS
- SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
- CONTACT MATERIAL - GOLD ALLOY

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



SCALE	FULL	DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±
WEIGHT	.076 LB	

ELECTRICAL DATA
CONTACT ARRANGEMENT
S P N 0



CHARACTERISTICS	OPERATING FORCE	RELEASE FORCE	DIFFERENTIAL TRAVEL	OVERTRAVEL
	----- 3 1/2 OZ MAX	----- 3/4 OZ MIN	----- .004-.040	----- .156 MIN

YZ-2RW80725551-D6
CATALOG LISTING
PAGE 1 OF 1
REPLACES X100891-YZ



1 ISSUE

4

CHECK

REVISIONS

A	200763		23NOV05
TSM	14JUL00		
B	0016786		
SPK			
	23NOV05		

CHECK

RJ

CHECK

14JUL00

CHECK

SAV

CHECK

14JUL00

TSM

DRAWN

PTC/CAD 2D