


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

| MOD | LOC | DIST | ZONE | LTR | DESCRIPTION | DATE | APPD |
|-----|-----|------|------|-----|--------------------------------|--------|------|
| 23 | BD | 39 | | C | REDRAWN AND REV PER ECN BD4183 | 9-6-90 | KZ |

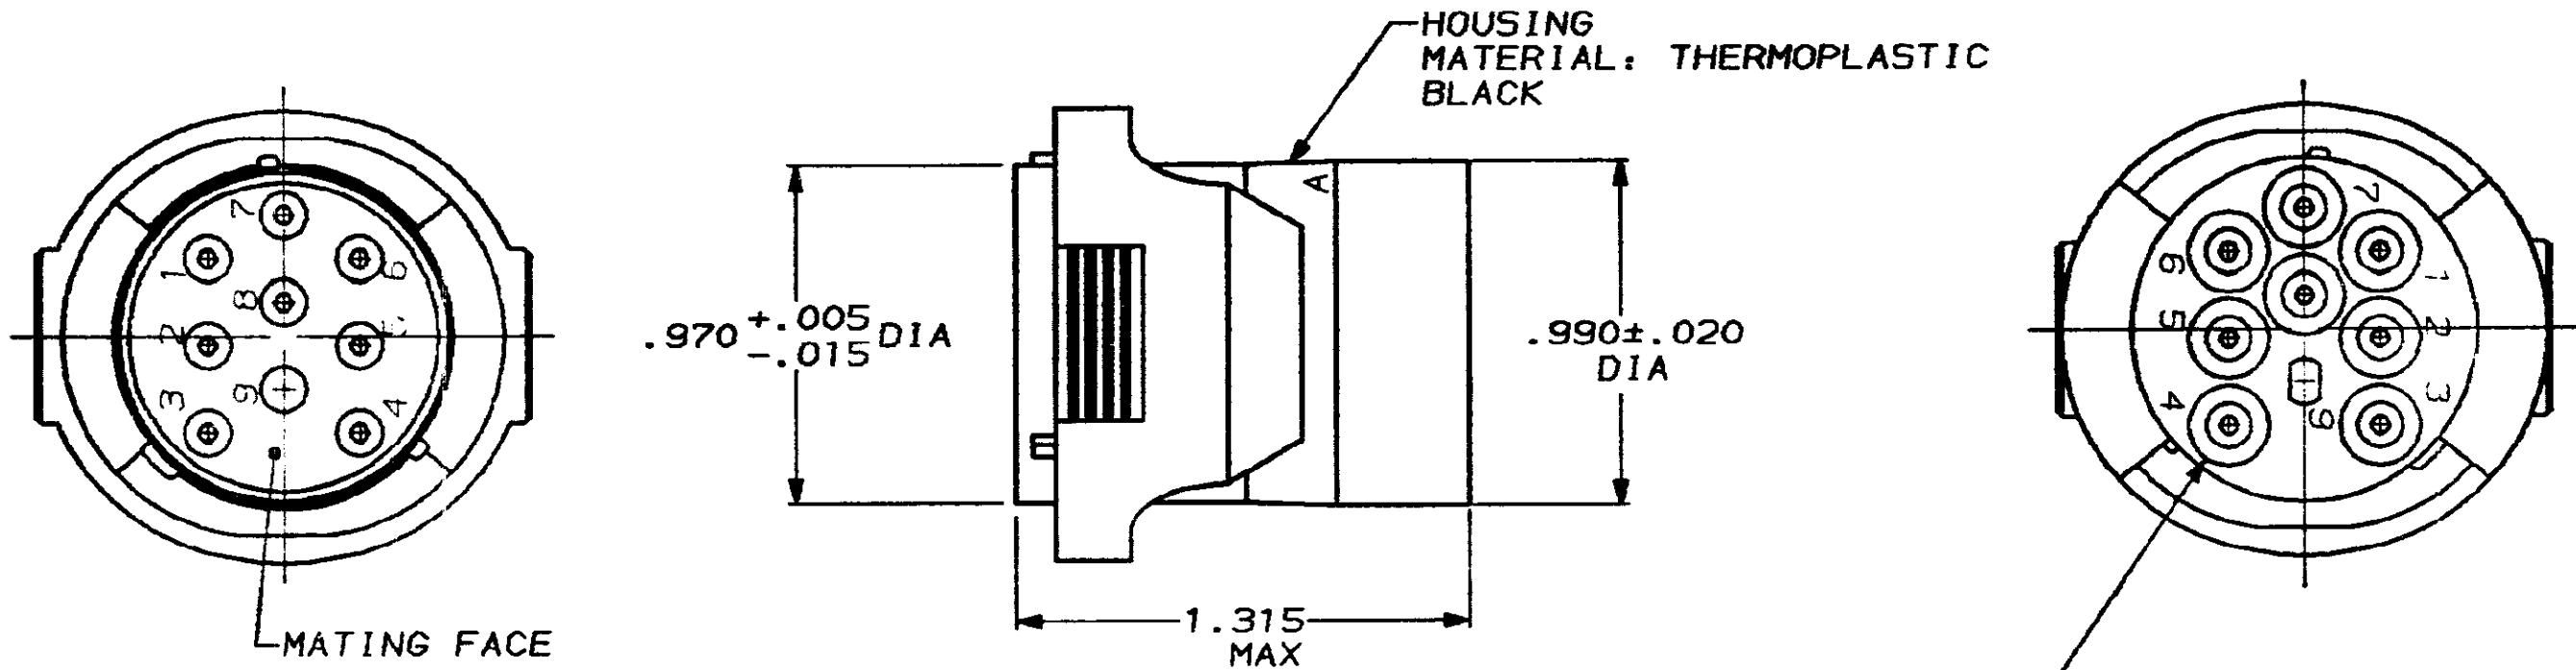

1. WIRE INSULATION SEALING RANGE: .070-.115 DIA.
2. MATES WITH 208677-1 OR 211068-1.
3. TOTAL LENGTH OF MATED CONNECTORS IS LESS THAN 2.50 INCHES.
4. THIN MEMBRANE PERMISSIBLE ON SMALL DIAMETER OF WIRE SEALS.
5. ROTATION OF CAVITY CIRCUIT KEY FROM PART TO PART IS PERMISSIBLE.

208678-1
 PART NUMBER

| | | | | |
|--|--|---|------------------|--|
| DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± - | DR 9-8-90 J. GALLUCCI BG | AMP INCORPORATED Harrisburg, Pa. 17105 | | |
| | CHK J. Mullin 1-4-91 APPD K. Beaulieu 1-10-91 | | | NAME PLUG, 8 POSITION, STANDARD ECONOSEAL CONNECTOR |
| MATERIAL SEE CALLOUT | APPD J. Ferguson 1/24/91 | SIZE B | FSCM NO 00779 | DRAWING NO 208678 |
| FINISH - | APPLICATION SPEC - | SCALE 2:1 | SHEET 1 OF 1 | |
| WEIGHT - | | CUSTOMER DRAWING | | |