

## Surface Mount Schottky Barrier Rectifier

### FEATURES

- AEC-Q101 qualified
- Low power loss, high efficiency
- Ideal for automated placement
- Guard ring for over-voltage protection
- High surge current capability
- Moisture sensitivity level: level 1, per J-STD-020
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_{F(AV)}$	1	A
$V_{RRM}$	30	V
$I_{FSM}$	50	A
$T_{JMAX}$	125	°C
Package	DO-214AA (SMB)	
Configuration	Single Die	

### APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Monitor
- TV



**DO-214AA (SMB)**

### MECHANICAL DATA

- Case: DO-214AA (SMB)
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: As marked
- Weight: 0.093 g (approximately)

ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	SKL13B	UNIT
Marking code on the device		SKL13B	
Repetitive peak reverse voltage	$V_{RRM}$	30	V
Reverse voltage, total rms value	$V_{R(RMS)}$	21	V
Maximum DC blocking voltage	$V_{DC}$	30	V
Forward current	$I_{F(AV)}$	1	A
Surge peak forward current, 8.3 ms single half sine-wave superimposed on rated load per diode	$I_{FSM}$	50	A
Junction temperature	$T_J$	- 55 to +125	°C
Storage temperature	$T_{STG}$	- 55 to +150	°C

<b>THERMAL PERFORMANCE</b>			
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>TYP.</b>	<b>UNIT</b>
Junction-to-lead thermal resistance	$R_{\theta JL}$	30	°C/W
Junction-to-ambient thermal resistance	$R_{\theta JA}$	85	°C/W

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)					
<b>PARAMETER</b>	<b>CONDITIONS</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>MAX</b>	<b>UNIT</b>
Forward voltage per diode <sup>(1)</sup>	$I_F = 1\text{A}, T_J = 25^\circ\text{C}$	$V_F$	-	0.39	V
Reverse current @ rated $V_R$ per diode <sup>(2)</sup>	$T_J = 25^\circ\text{C}$	$I_R$	-	0.20	mA
	$T_J = 100^\circ\text{C}$		-	50	mA

**Notes:**

1. Pulse test with  $PW=0.3$  ms
2. Pulse test with  $PW=30$  ms

<b>ORDERING INFORMATION</b>		
<b>ORDERING CODE</b> (Note 1 ,2)	<b>PACKAGE</b>	<b>PACKING</b>
SKL13BHR5G	SMB	850 / 7" Plastic reel
SKL13BHR4G	SMB	3,000 / 13" Paper reel
SKL13BHM4G	SMB	3,000 / 13" Plastic reel
SKL13BHR5	SMB	850 / 7" Plastic reel
SKL13BHR4	SMB	3,000 / 13" Paper reel
SKL13BHM4	SMB	3,000 / 13" Plastic reel
SKL13B R5G	SMB	850 / 7" Plastic reel
SKL13B R4G	SMB	3,000 / 13" Paper reel
SKL13B M4G	SMB	3,000 / 13" Plastic reel
SKL13B R5	SMB	850 / 7" Plastic reel
SKL13B R4	SMB	3,000 / 13" Paper reel
SKL13B M4	SMB	3,000 / 13" Plastic reel


**Note:**

1. "H" means AEC-Q101 qualified.
2. "G" means green compound


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig1. Forward Current Derating Curve**

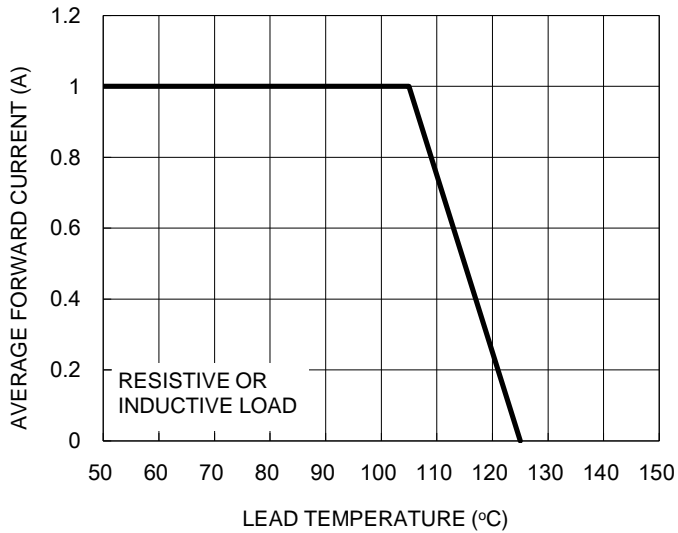


**Fig2. Typical Junction Capacitance**

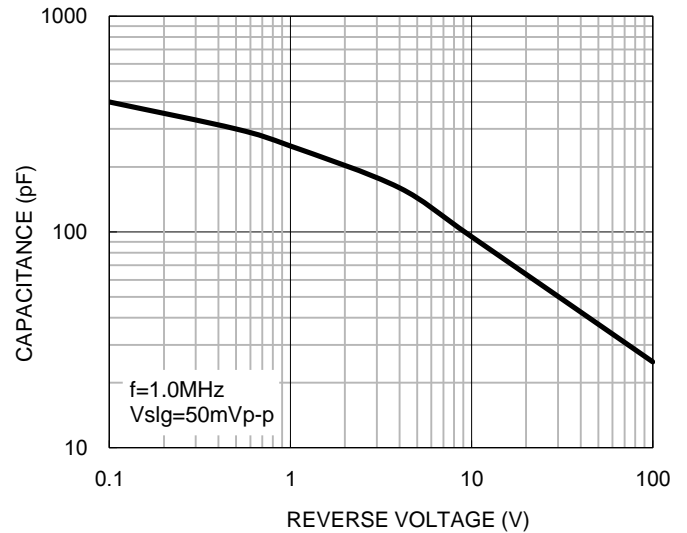

**Fig3. Typical Reverse Characteristics**

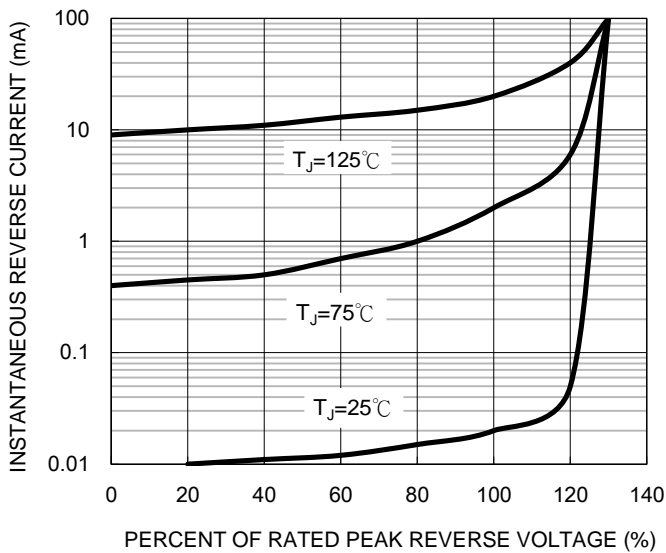


**Fig4. Typical Forward Characteristics**

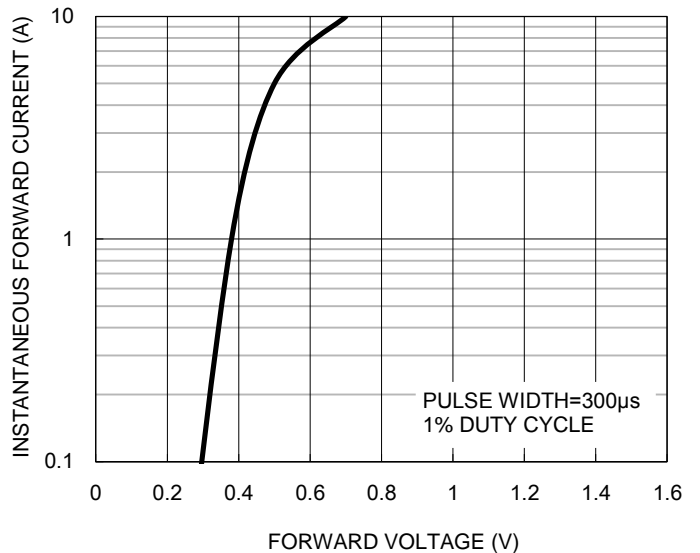

**CHARACTERISTICS CURVES**


( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Fig5. Maximum Non-repetitive Forward Surge Current**

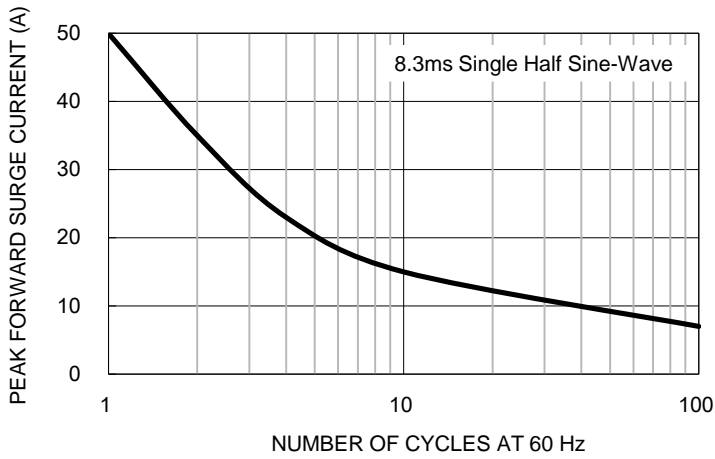


**PACKAGE OUTLINE DIMENSIONS**

DO-214AA (SMB)

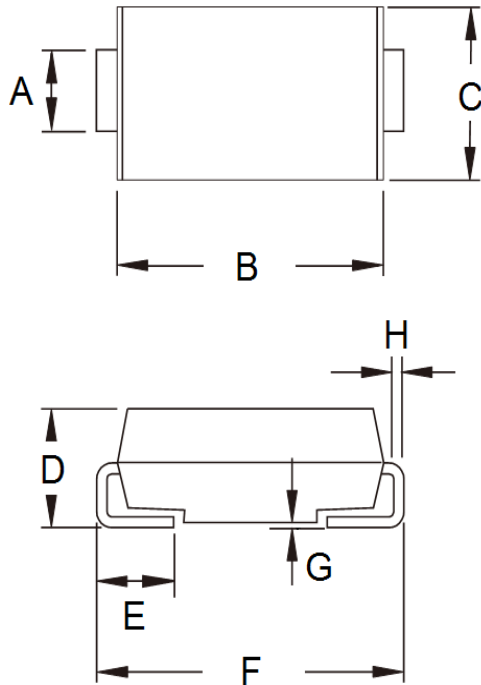


DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.95	2.20	0.077	0.087
B	4.05	4.60	0.159	0.181
C	3.30	3.95	0.130	0.156
D	1.95	2.65	0.077	0.104
E	0.75	1.60	0.030	0.063
F	5.10	5.60	0.201	0.220
G	0.05	0.20	0.002	0.008
H	0.15	0.31	0.006	0.012

**SUGGESTED PAD LAYOUT**

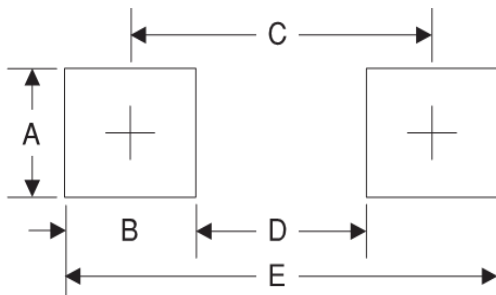

Symbol	Unit (mm)	Unit (inch)
A	2.3	0.091
B	2.5	0.098
C	4.3	0.169
D	1.8	0.071
E	6.8	0.268

**MARKING DIAGRAM**



P/N = Marking Code  
G = Green Compound  
YW = Date Code  
F = Factory Code

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.