
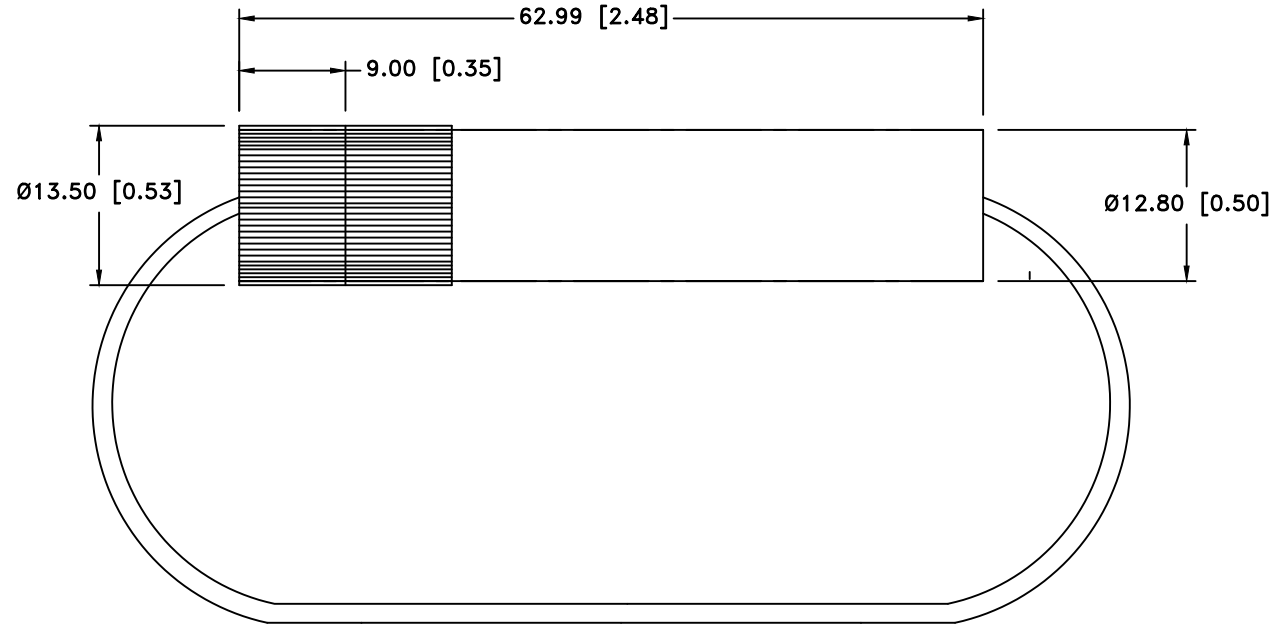



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/24/17	A	UPDATED SPECIFICATION	T.B.	B.S.	
04/06/18	B	UPDATED TITLE	T.B.	B.S.	



NOTES:

- MATERIAL:
HOUSING : BAKELITE BODY ,UL94V-0, FILE NO. E59481
- LEAD WIRE IN LOOP: RED WIRE, 12 AWG, UL 1015, 600V, 105°C, FLAME RATED VW-1, UL FILE NO. E108485 OR ENGINEERING APPROVED EQUIVALENT
- RATED CURRENT: 30A
- ACCEPTS AGC/JMC FUSES
- INSULATION RESISTANCE AT 500V DC: 100MΩ MIN
- CONTACT RESISTANCE: 5mΩ AT 1A DC
- DIELECTRIC STRENGTH FOR 60 SECONDS: AC 2000V MIN
- ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title INLINE FUSE HOLDER ABC/ATE/JMC/JTB FUSES		
Angular ± 3°	Date 04/06/18	Drawing Number BF302	