


| | | | | | | | |
|-------------------|------|-----------|-----|---------------------------|----------|-----|---------|
| LOC | DIST | REVISIONS | | | | | |
| — | — | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| NUMMER 829 033 | | | D | REVISIONSSTAND ANGEPAßT | 08.02.00 | — | A. ZITZ |
| VERWENDET FÜR | | | D1 | REVISED PER ECO-09-024717 | 06NOV09 | — | AEG |
| WAR NR. E-87-9102 | | | D2 | ECR-10-025774 | 24JAN11 | KK | HMR |

| POLZ PRO REIHE | L±0.5 | BESTELL-NR. |
|----------------|--------|---------------|
| — | — | — |
| 2 | 5.08 | -2 |
| 3 | 7.62 | -3 |
| 4 | 10.16 | -4 |
| 5 | 12.70 | -5 |
| 6 | 15.24 | -6 |
| 7 | 17.78 | 829 033 -7 |
| 8 | 20.32 | -8 |
| 9 | 22.86 | -9 |
| 10 | 25.40 | -0 |
| 11 | 27.94 | 1- |
| 12 | 30.48 | 1- |
| 13 | 33.02 | 1- |
| 14 | 35.56 | 1- |
| 15 | 38.10 | 1- |
| 16 | 40.64 | 1- |
| 17 | 43.18 | 1- |
| 18 | 45.72 | 1- |
| 19 | 48.26 | 1- |
| 20 | 50.80 | 2- |
| 21 | 53.34 | 2- |
| 22 | 55.88 | 2- |
| 23 | 58.42 | 2- |
| 24 | 60.96 | 2- |
| 25 | 63.50 | 2- |
| 26 | 66.04 | 2- |
| 27 | 68.58 | 2- |
| 28 | 71.12 | 2- |
| 29 | 73.66 | 2- |
| 30 | 76.20 | 3- |
| 31 | 78.74 | 3- |
| 32 | 81.28 | 3- |
| 33 | 83.82 | 3- |
| 34 | 86.36 | 3- |
| 35 | 88.90 | 3- |
| 36 | 91.44 | 3- |
| 37 | 93.98 | 3- |
| 38 | 96.52 | 3- |
| 39 | 99.06 | 3- |
| 40 | 101.60 | 4- |
| 41 | 104.14 | 4- |
| 42 | 106.68 | 4- |
| 43 | 109.22 | 4- |
| 44 | 111.76 | 4- |
| 45 | 114.30 | 4- |
| 46 | 116.84 | 4- |
| 47 | 119.38 | 4- |
| 48 | 121.92 | 4- |
| 49 | 124.46 | 4- |
| 50 | 127.00 | 5- 829 033 -0 |

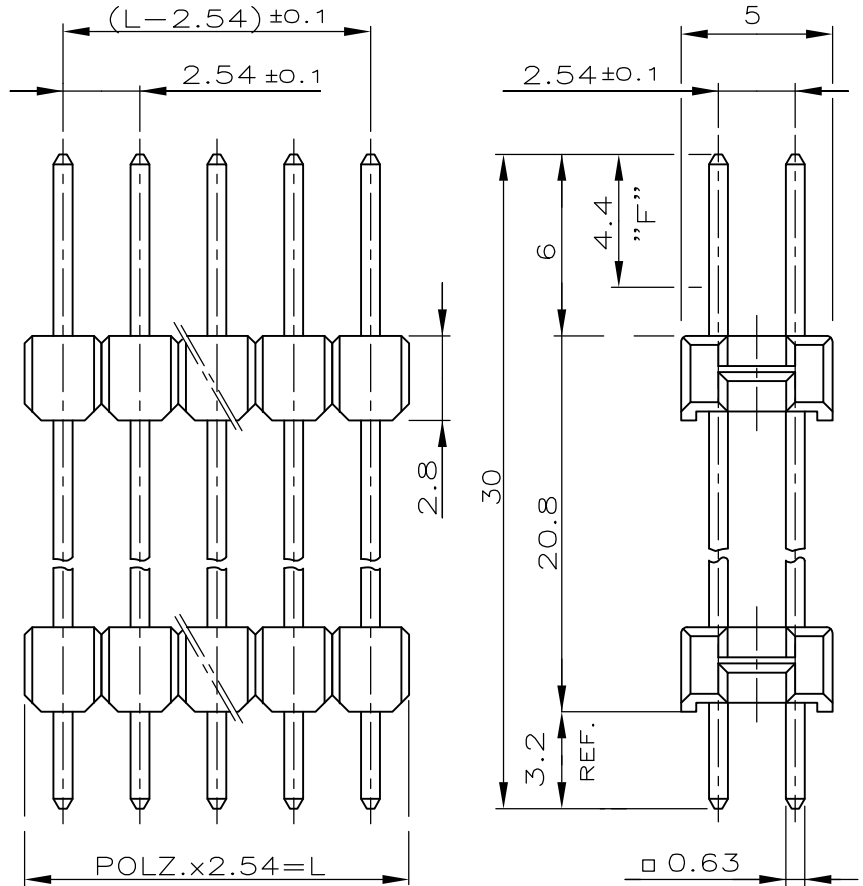

- 1 STECKSEITE: IM BEREICH "F" 0.8 µm GOLD ÜBER 1.27 µm NICKEL
LÖTSEITE: MIN. 2.5 µm ZINN ÜBER 1.27 µm NICKEL
- 2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

CAD-ORIGINAL
ZEICHNUNG NICHT ÄNDERN

| | | |
|--------------|-----------|------------------|
| KONTAKTSTIFT | Cu Sn | 1 |
| STIFTGEHÄUSE | PBTP-GV | GRÜN |
| BENENNUNG | WERKSTOFF | OBERFLÄCHE FARBE |

ZEICHNUNG GÜLTIG AB 26/90...

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

By -
COPYRIGHT -

THIS DRAWING IS UNPUBLISHED.

| | | | | | | | |
|---|------------------|----------|---|----------|-----------|---------------|----|
| DIMENSIONS: mm | DWN | 12.03.87 | MATERIAL | — | FINISH | — | |
| | CHK | 19.03.87 | AUGUSTINIAK | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2 mm | APVD | — | M.Schaarschmidt | | | | |
| | PRODUCT SPEC | — | — | | | | |
| 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - | APPLICATION SPEC | — | SPEZ. AMPMODU II STIFTLISTE ZWEIREIHIG | | | | |
| | WEIGHT | — | SIZE | A4 | CAGE CODE | 00779 | |
| CUSTOMER DRAWING | | | DRAWING NO | C-829033 | | RESTRICTED TO | — |
| SCALE | | | 4:1 | SHEET | 1 OF 1 | REV | D2 |