
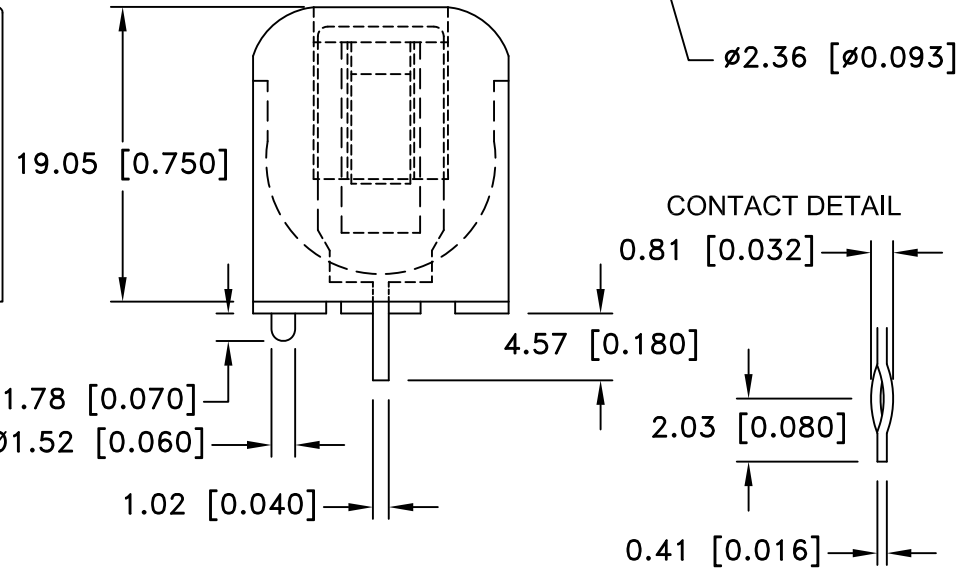
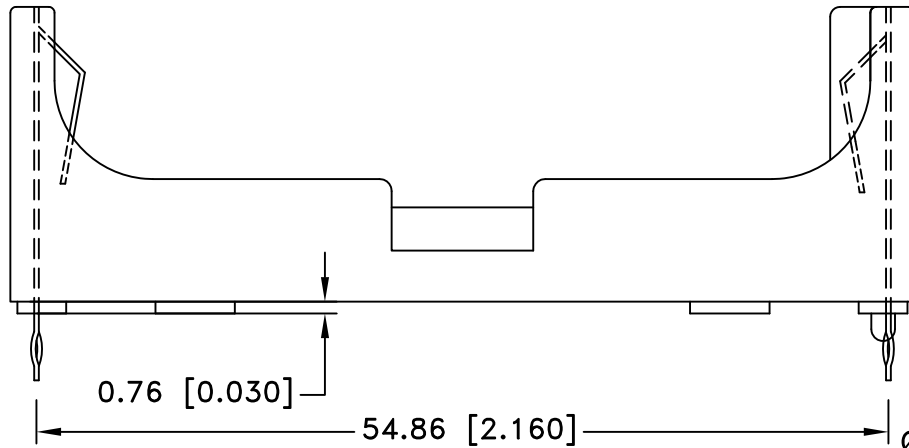


Date	SYM	REVISION RECORD	AUTH	DR.	CK.

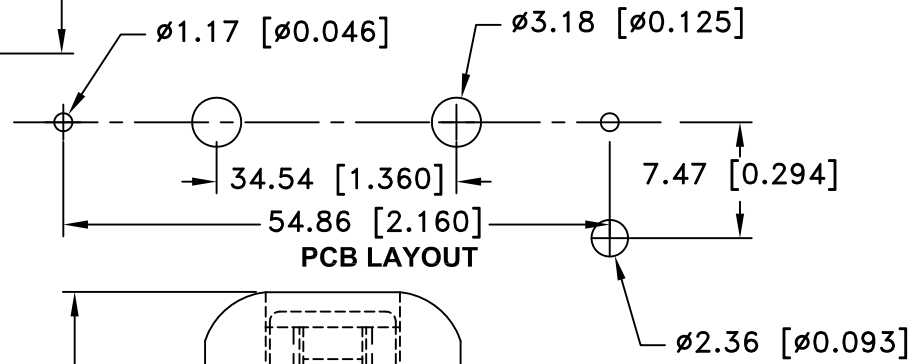


**SPECIFICATIONS:**

Holder Material: Black PBT, Flamability Rating: UL94V-0, FILE #E53829  
 Contacts: 301 Spring temper stainless steel, nickel plated overall  
 Dielectric strength: 560 Volts/mil at 25°C for 5 Sec.  
 Temperature Range: -55°C to +180°C  
 Vibration Test: 10-50-10 Hz swept in 60 seconds

X,Y,Z direction: 1 hour each direction, No dislodgement of the cell or damage, No discontinuity over 10 micro-seconds  
 Shock Test: Half sine wave acceleration 150g, 6 micro-seconds, 1 shock pulses each direction per axis, total of 6 pulses, No evidence of physical damage

NOTES: Eyelet Stimpson style #A1883 0.110" OD x 0.190" Flange  
 Flange Recess Ø0.203" x 0.090" Deep  
 Accepts Standard 2-56 Machine Screws

Accessories: BI-UM-3-4, Insulator  
 ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title AA HOLDER WITH REVERSE POLARITY PROTECTION	Date 02/04/11	
Fractional ± .8 (.030)		Drawing Number BHAA-POL	
Angular ± 3°	Date 02/04/11		
Drawing Number BHAA-POL			