

Ratings

Voltage: 300 V
 Temperature: -10 to 105 °C
 Flammability: VW-1

Conductor

Conductor count: 2
 Gauge: 26 AWG mm²
 Material: tinned copper strands
 Strand size: Ø mm x 7
 Max resistance at 20 °C: 150 ohm/km



Outer jacket

Material: PVC
 Color: red and black
 Diameter: 2.7 ±0.20 mm (1.35x2.7)
 Nominal thickness: 0.38 mm

Wire marking: E339579 UL AWM STYLE 2651 26 AWG 105°C
 300V VW-1 - - - cUL AWM I/II A 105°C 300V FT1 TENSILITY

Tests

Voltage test: 300 V
 Spark test: 3.0 kV
 Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 136 ±2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 136 ±1 °C /1 hour, no observed degradation
 Deformation: 136 ±1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ±2 °C /1 hour, no observed cracking
 Dielectric test: 2000 Vac for 1 minute without breakdown

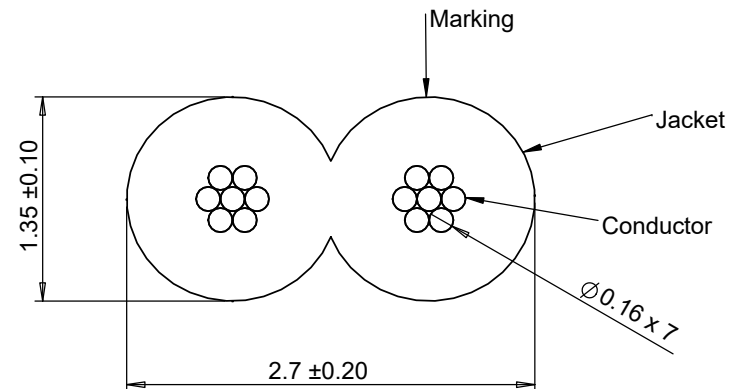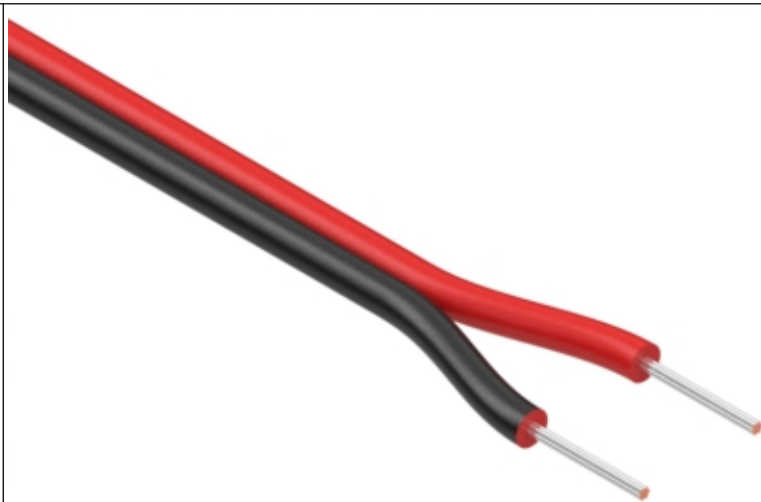

| | | | | | |
|-----------|------------|-----------------|--|---|---|
| Revision: | Date: | Description: | Prepared: | Notes: RoHS and REACH compliant | TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com |
| A | 10/25/2016 | Initial release | Verified: | | |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: | Size: Part number: |
| | | | | Wire, 2C TS, 26 AWG, UL2651, 300V, 105C, 2.7 mm, VW-1, PVC, red and black | A 30-00807 |
| | | | | Scale: 20:1 | |