


PROCESS CP191V
Small Signal Transistor
NPN - Amp/Switch Transistor Chip



PROCESS DETAILS

| | |
|--------------------------|------------------|
| Process | EPITAXIAL PLANAR |
| Die Size | 16.5 x 16.5 MILS |
| Die Thickness | 7.1 MILS |
| Base Bonding Pad Area | 3.5 x 4.3 MILS |
| Emitter Bonding Pad Area | 3.5 x 4.3 MILS |
| Top Side Metalization | Al - 30,000Å |
| Back Side Metalization | Au-As - 13,000Å |

GEOMETRY

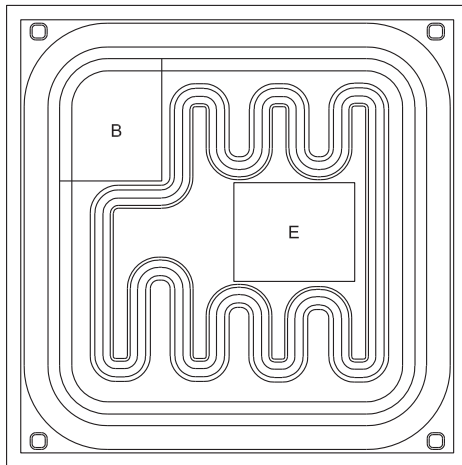

GROSS DIE PER 4 INCH WAFER
41,699







PRINCIPAL DEVICE TYPES

- CMLT2222A
- CMLT2207
- CMLM2205
- CMKT2207

R1 (22-March 2010)

PROCESS CP191V

Typical Electrical Characteristics

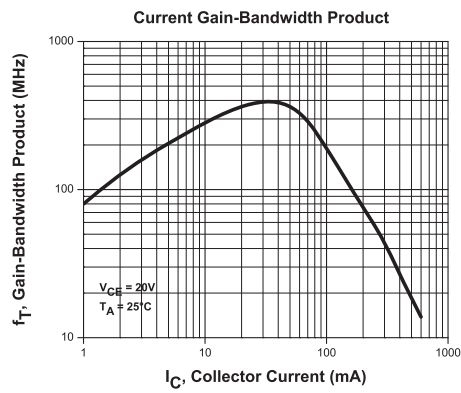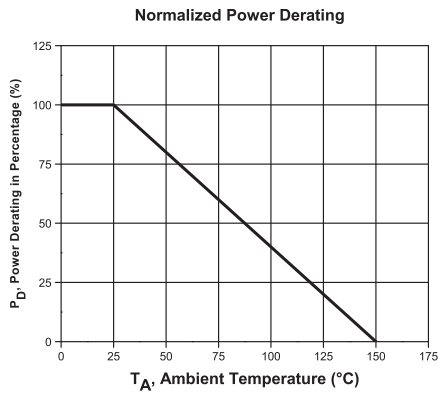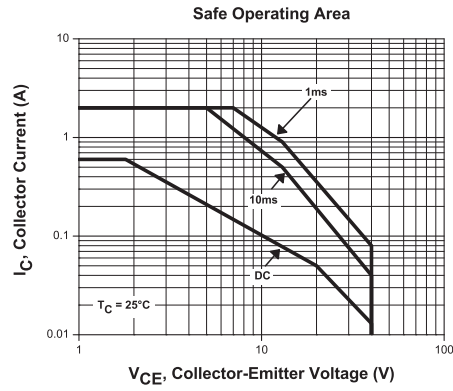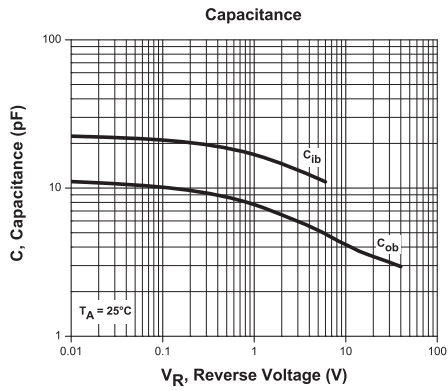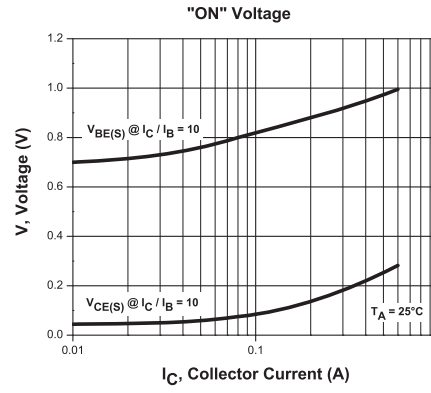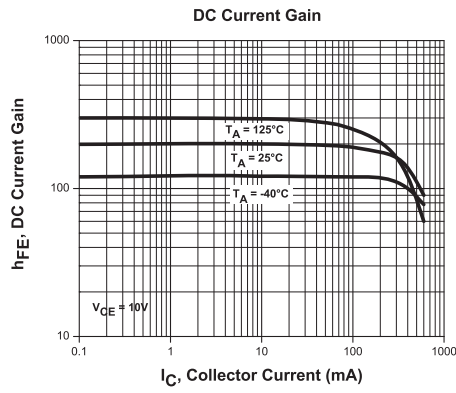

R1 (22-March 2010)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms