


Specification Sheet

Part Number: T30RSF9C2

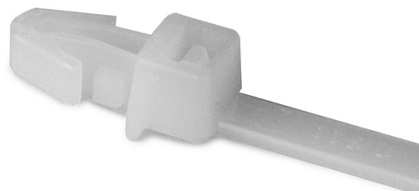

Arrowhead Push-Mount Cable Tie, 6.3"L, 30lb, 0.04"–0.09" Panel Thickness, PA66, Natural, 100/pkg

Article Number	111-85603
Type	T30RSF(U)
Color	Natural (NA)
Features & Benefits	<ul style="list-style-type: none">•All-in-one bundling and fastening solution reduces costs and assembly time.•The arrowhead design of these ties offers a low insertion force and a high extraction force.•High-spec materials and superior design deliver versatility, performance and value.
Quantity Per	bag

Product Description

One-piece mounting ties offer a complete solution by both bundling cable and simultaneously providing a mounting solution. The arrowhead design of this push mount inserts easily and locks securely in place. HellermannTyton's one-piece mounting ties combine high-specification materials with superior design to deliver dependable performance in a range of applications.

Short Description	Arrowhead Push-Mount Cable Tie, 6.3"L, 30lb, 0.04"–0.09" Panel Thickness, PA66, Natural, 100/pkg
Global Part Name	T30RSF(U)-PA66-NA
Minimum Tensile Strength (Imperial)	30.0
Minimum Tensile Strength (Metric)	136
Length L (Imperial)	6.3
Length L (Metric)	158.0
Fixation Method	Arrowhead
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.14
Width W (Metric)	3.6
Bundle Diameter Min (Imperial)	0.06
Bundle Diameter Min (Metric)	1.6
Bundle Diameter Max (Imperial)	1.3

Bundle Diameter Max (Metric)	32.0
Thickness T (Imperial)	0.05
Thickness T (Metric)	1.2
Height H (Imperial)	.20
Height H (Metric)	5.80
Panel Thickness Min(Imperial)	0.03
Panel Thickness Max(Imperial)	0.09
Panel Thickness Min (Metric)	0.75
Panel Thickness Max (Metric)	2.1
Mounting Hole Diameter D (Imperial)	0.19 - 0.22
Mounting Hole Diameter D (Metric)	4.7 - 5.6 mm
Mounting Hole Diameter D Min (Imperial)	0.19
Mounting Hole Diameter D Max (Imperial)	0.22
Mounting Hole Diameter D Max (Metric)	5.6
Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66

Flammability	UL 94 V2
Operating Temperature (Metric)	-40°F to +185°F (-40°C to +85°C)
Reach Complaint(Article 33)	Yes
ROHS Complaint	Yes
Certification/Specification WEB	UL CAN/CSA-C22.2 no. 62275 UL CAN/CSA-C22.2 no. 18.5 UL ANSI/UL 746B UL ANSI/UL 1565 UL ANSI/UL 62275
UL Recognized (US)	Yes
UL Recognized (US and Canada)	Yes
Package Quantity(Imperial)	100
Package Quantity (Metric)	100
Customs Number	3926909987
Content Unit(BMEcat)	pcs.
Weight (Metric)	0.9