


M20 Connectors

2.54mm (.100") PITCH

Male Vertical Surface Mount Double Row

- Pin headers without pegs can be cut into smaller sizes.
- Peg option to assist with location during surface mount process.
- Also available with variable dimensions.
- Tape and Reel option supplied fitted with Pick and Place cap, contact technical@harwin.com for availability.
- Suitable for use with female connectors and jumper sockets shown on previous pages.

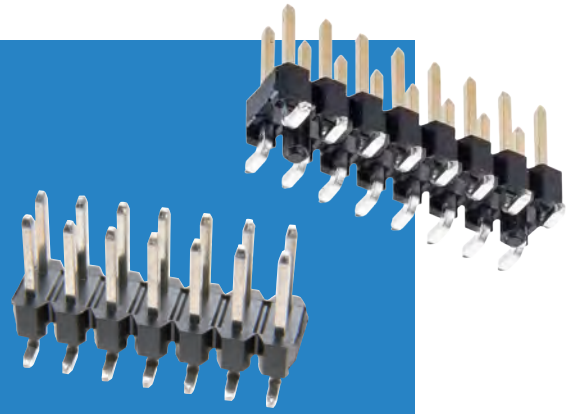

WITHOUT PEGS	CALCULATION	WITH PEGS	CALCULATION
	A 2.54 x No. of contacts per row		A 2.54 x No. of contacts per row
	B 2.54 x (No. of contacts per row - 1)		B 2.54 x (No. of contacts per row - 1)
			C B - 2.54

Recommended PC Board Pattern

Recommended PC Board Pattern

HOW TO ORDER

M20 - 87 X XX XX X

SERIES CODE

TYPE

6	Without Pegs
5	With Pegs

NO. OF CONTACTS PER ROW

02 to 36	Without Pegs
02 to 08, 10	With Pegs (Loose)
02, 03, 05, 07, 08, 10	With Pegs (Reeled)

PACKAGING

Blank	Loose
P	Pick and Place cap, tube (Without Pegs)
R	Tape & Reeled

FINISH

42	Gold + Tin
46	Tin (Without Pegs)

All dimensions in mm.